




Pole specification:

- 76mm tubular steel – approximately 3.3m in length
- Installed to provide a minimum of 2.1m clearance from ground to bottom edge of the flag
- Increased to 2.3m clearance if a shared cycleway
- Post installed a minimum of 0.5m from the kerb with flag facing away from the road
- To be installed so that in line with vehicle doors when the vehicle is stopped at the front of the cage markings

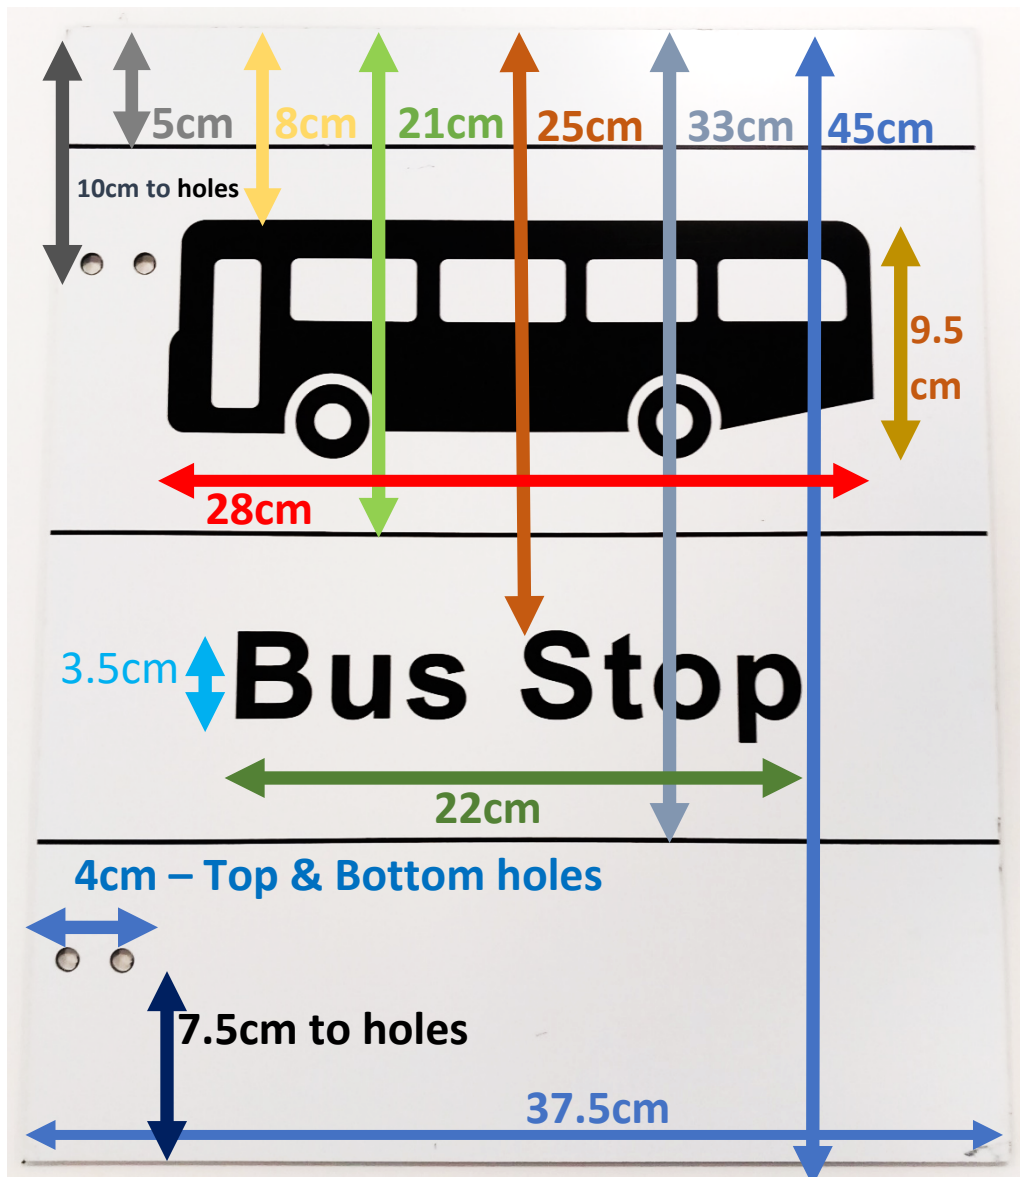

Bus Stop

