


Plant Schedule						
Climbers						
Name	Height	Girth	Root	Cntr	Ctrs	Qty
Hydrangea petiolaris	100-120cm		C	7L		4
Hedges						
Name	Height	Girth	Root	Cntr	Ctrs	Qty
Carpinus betulus - 90cm (Double Staggered Row)	90-120cm		RB		500	55
Herbaceous						
Name	Height	Girth	Root	Cntr	Ctrs	Qty
Carex oshimensis 'Evergold'			C	3L	400	29
Shrubs						
Name	Height	Girth	Root	Cntr	Ctrs	Qty
Choisya ternata 'Sundance'	40-60cm		C	10L	700	10
Euonymus fortunei 'Emerald Gaiety'	40-60cm		C	10L	700	29
Hebe rakaiensis	40-60cm		C	10L	600	29
Hydrangea arborescens 'Annabelle'	60-80cm		C	10L	700	10
Pittosporum tenuifolium 'Golf Ball'	110-125cm		C	10L	800	10
Sarcococca hookeriana var. digyna 'Purple Stem'	60-80cm		C	10L	700	19
Skimmia confusa 'Kew Green'	60-80cm		C	10L	700	10
Trees						
Name	Height	Girth	Root	Cntr	Ctrs	Qty
Prunus maackii Amber Beauty	400-450cm	14-16cm	RB			2
Sorbus aria 'Lutescens'	400-450cm	14-16cm	RB			4
Sorbus rosea	400-450cm	14-16cm	RB			3
Tilia cordata	550-600cm	18-20cm	RB			2

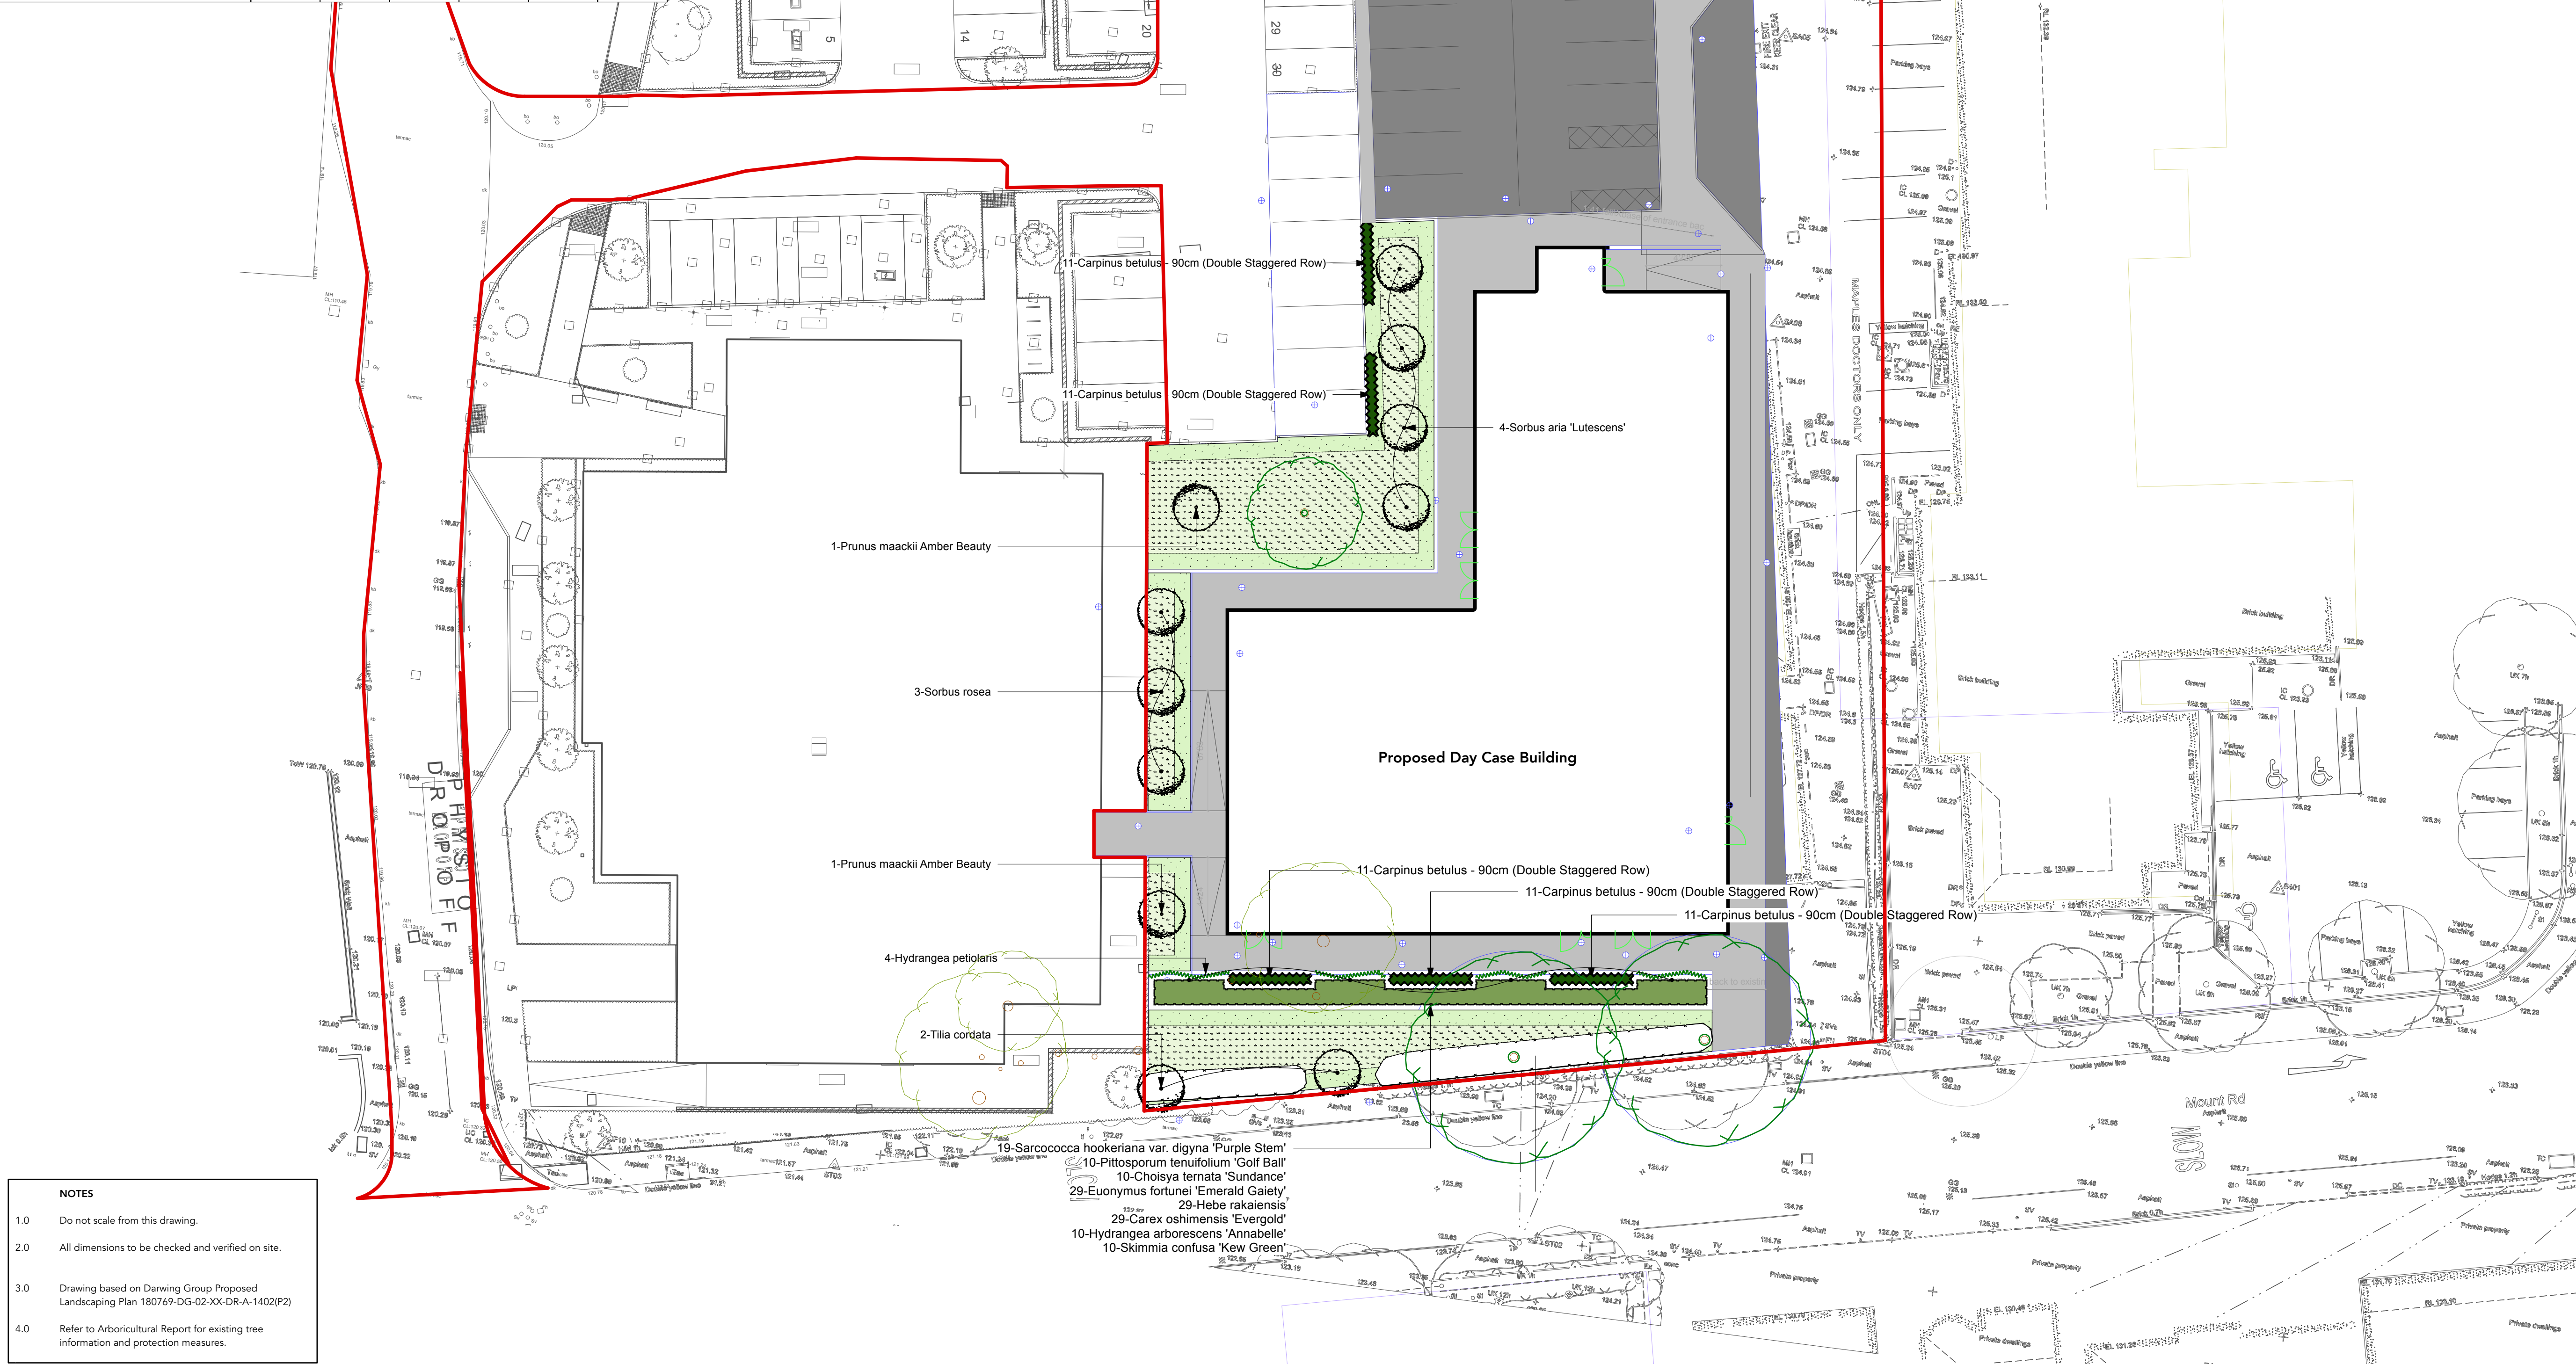

NOTES	
1.0	Do not scale from this drawing.
2.0	All dimensions to be checked and verified on site.
3.0	Drawing based on Dawning Group Proposed Landscaping Plan 180769-DG-02-XX-DR-A-1402(P2)
4.0	Refer to Arboricultural Report for existing tree information and protection measures.

Landscape General Arrangement Plan 1:200 @ A1

LEGEND	
Soft Landscaping:	
	Existing surveyed trees and groups to be retained. Refer to Arboricultural report for tree survey information.
	Proposed tree
	Existing Hedge to be retained
	Proposed Ornamental Planting
	Proposed Hedge
	Proposed Climbing Planting
	Proposed Special General Purpose Meadow Mixture - 335.3m² Supplier: Emorsgate Seeds Product: EMG Special General Purpose Meadow Mixture Sowing Rate: 4g/m²
	Proposed Special General Purpose Meadow Mixture - 49m² Arise sward length to be maintained above 7cm. Maintain a 900mm wide mown edge to all grassed areas

P05	27/06/2025	Existing hedge along Mount Road shown as retained	SP
P04	10/04/2025	Additional Planting to car park omitted	SP
P03	10/04/2025	Red Line Boundary Updated	SP

Rev	Date	Revision Details	Author
S0		Purpose for Issue FOR INFORMATION	

PLANTOLOGY			
Landscape Design			
Client:	Darwin Group		
Job:	Hinckley Day Case		
Draw Title:	Detailed Planting Plan and Schedule		
Scale:	1:200	Size:	A1
Drawn:	SP	Date:	Mar 25
Drawing Number:	PLANT168-ZZ-XX-DR-L-101		
Revision:	P05		

The copyright of this drawing is vested in the Architect/ Designer and must not be copied or reproduced without the written consent. Figured dimensions only to be taken from this drawing. All contractors and/or specialists must read the plan and be responsible for taking and checking all dimensions before to the work.