


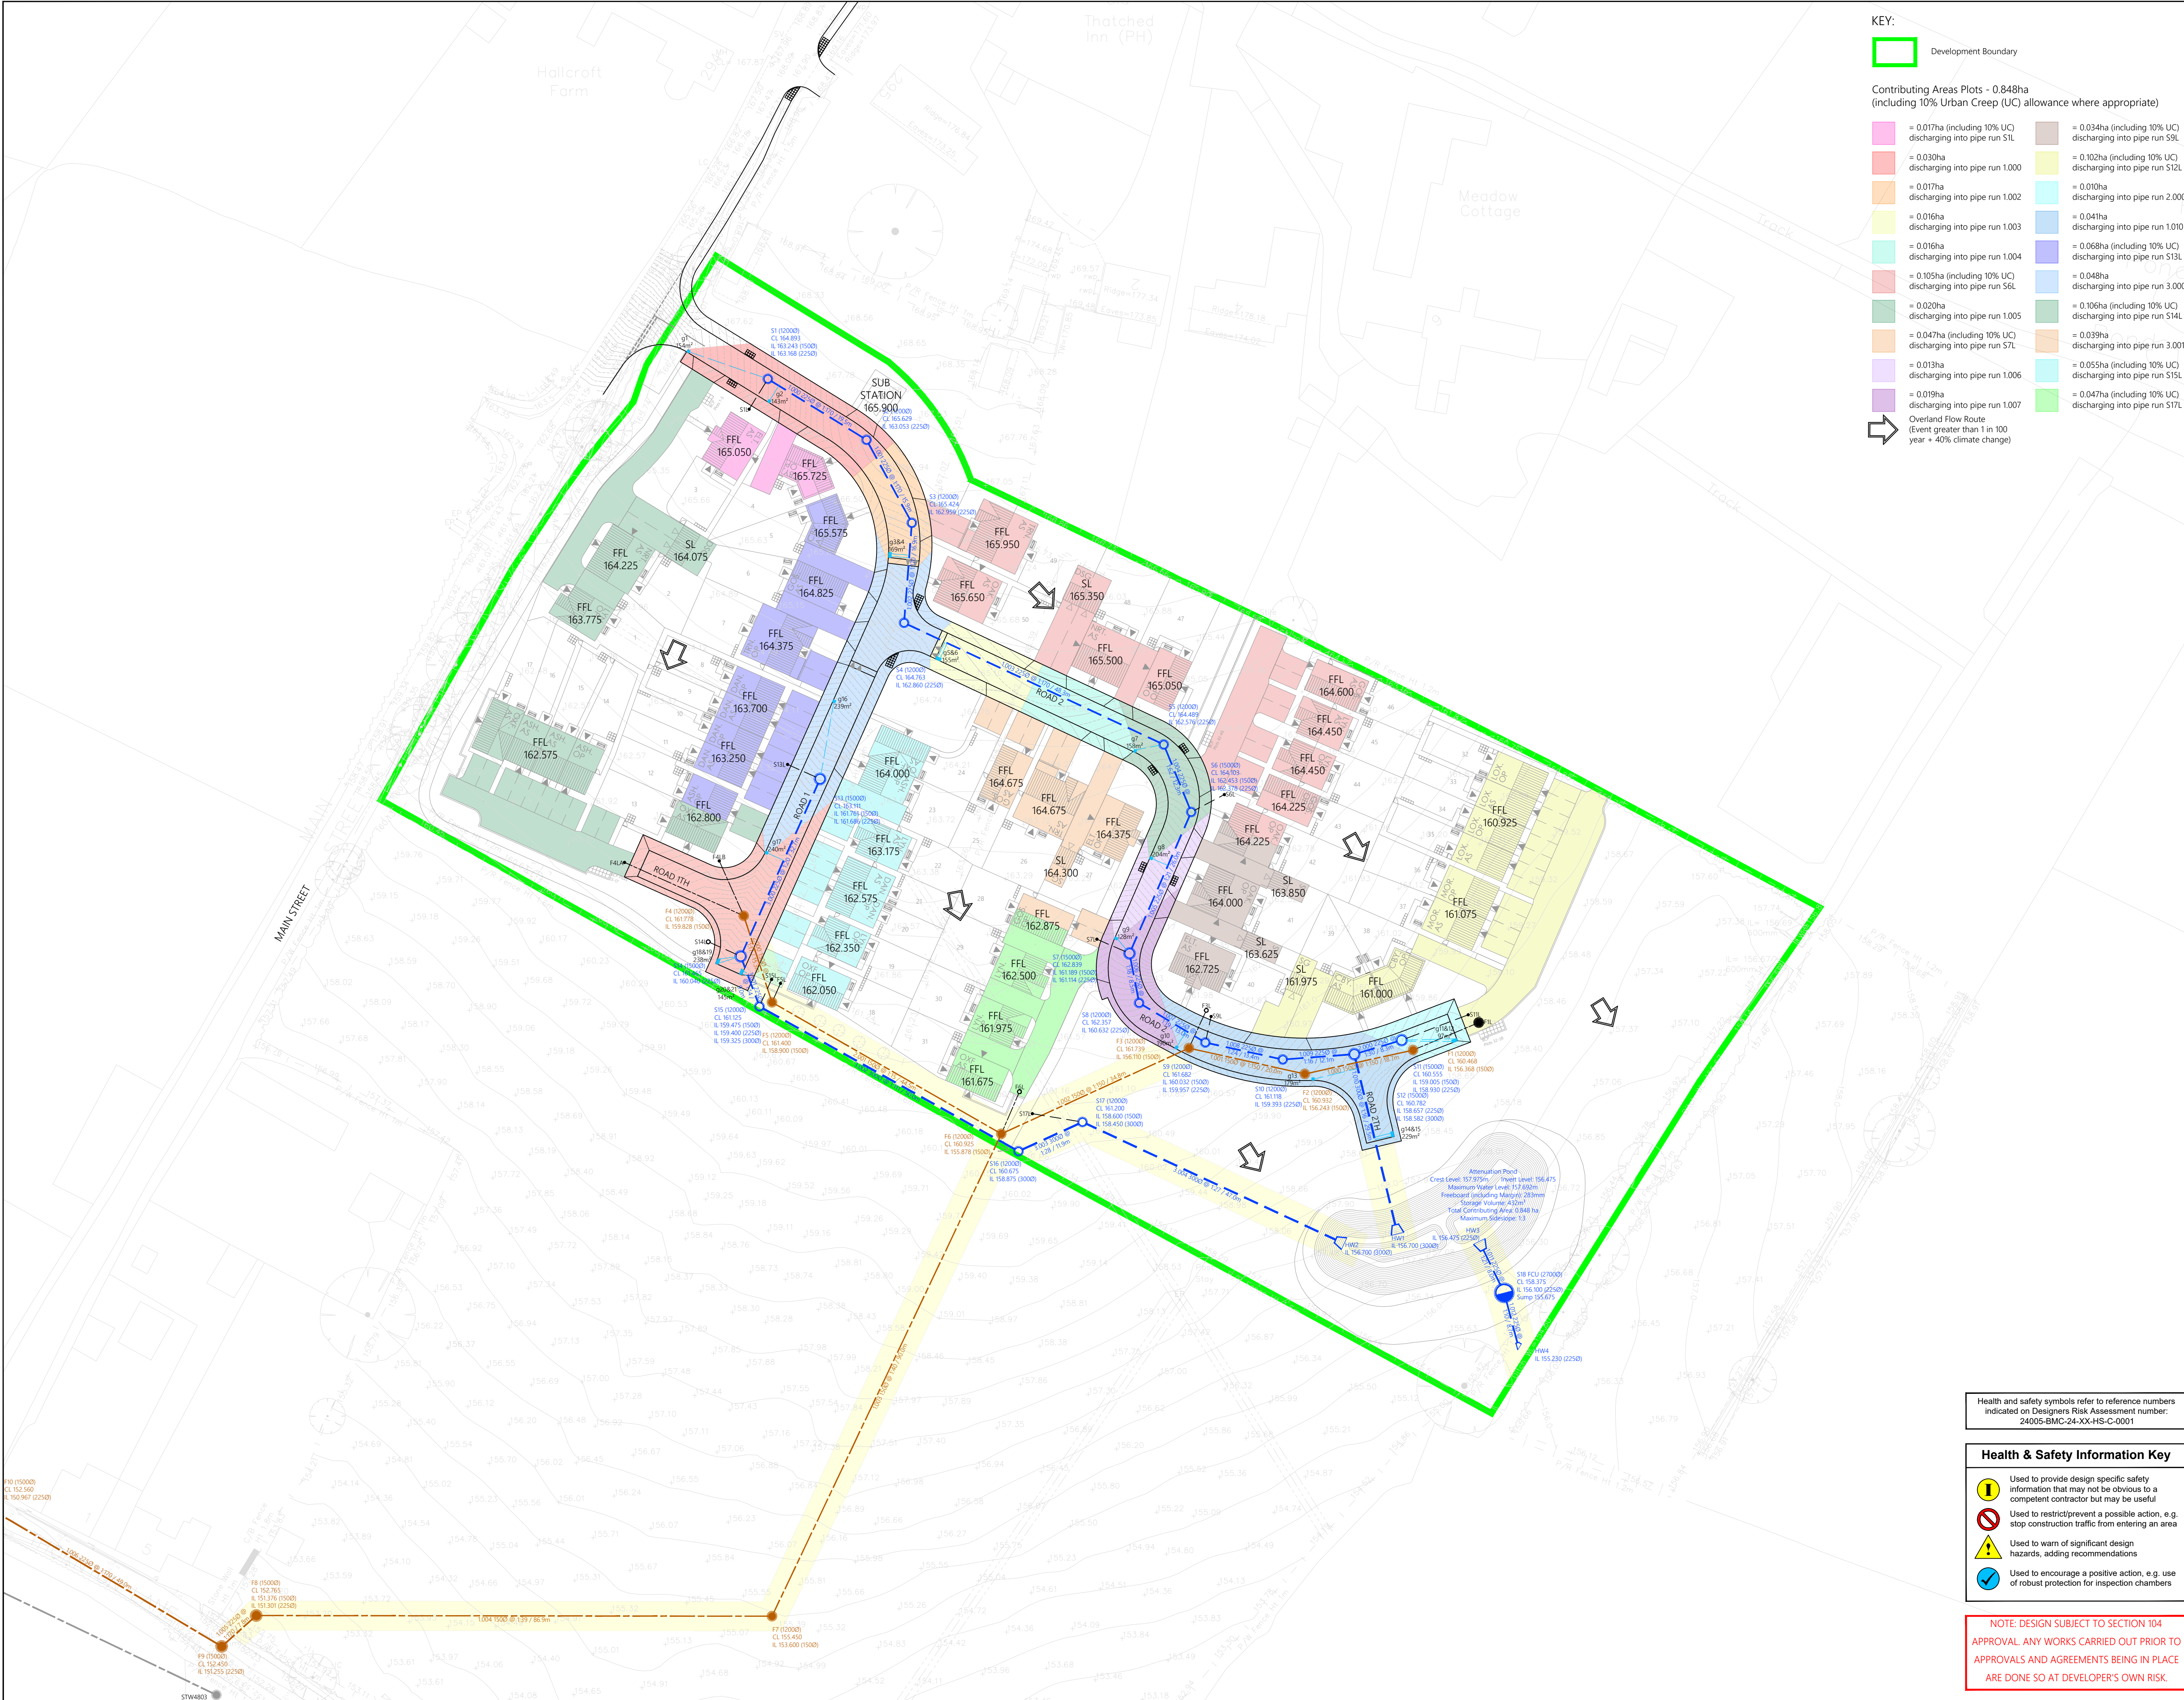

KEY:
 Development Boundary

Contributing Areas Plots - 0.848ha
(including 10% Urban Creep (UC) allowance where appropriate)

- | | |
|--|---|
| = 0.017ha (including 10% UC) discharging into pipe run S1L | = 0.034ha (including 10% UC) discharging into pipe run S9L |
| = 0.030ha discharging into pipe run 1.000 | = 0.102ha (including 10% UC) discharging into pipe run S12L |
| = 0.017ha discharging into pipe run 1.002 | = 0.010ha discharging into pipe run 2.000 |
| = 0.016ha discharging into pipe run 1.003 | = 0.041ha discharging into pipe run 1.010 |
| = 0.016ha discharging into pipe run 1.004 | = 0.068ha (including 10% UC) discharging into pipe run S13L |
| = 0.105ha (including 10% UC) discharging into pipe run S6L | = 0.048ha discharging into pipe run 3.000 |
| = 0.020ha discharging into pipe run 1.005 | = 0.106ha (including 10% UC) discharging into pipe run S14L |
| = 0.047ha (including 10% UC) discharging into pipe run S7L | = 0.039ha discharging into pipe run 3.001 |
| = 0.013ha discharging into pipe run 1.006 | = 0.055ha (including 10% UC) discharging into pipe run S15L |
| = 0.019ha discharging into pipe run 1.007 | = 0.047ha (including 10% UC) discharging into pipe run S17L |
- Overland Flow Route
(Event greater than 1 in 100 year + 40% climate change)

GENERAL NOTES

- DO NOT SCALE.
- This drawing is to be read in conjunction with all other relevant drawings and details.
- Should there be any conflict between the details indicated on this drawing and other drawings the Engineer should be informed PRIOR to construction on site.
- Until technical approval has been obtained from the relevant Authority, it should be understood that all drawings issued are Preliminary and NOT for construction. Should the Contractor commence site works prior to such approval being provided it is entirely at their own risk.
- Sketch proposals are for illustrative purposes only and as such are subject to detailed site investigation including ground conditions, contaminants, drainage, design and planning / density negotiations.
- All dimensions are in metres unless otherwise stated.
- The Designer's Risk Assessment(s) for this project must be reviewed PRIOR to the commencement of any works.
- Any discrepancies noted on site are to be reported to the Engineer immediately.
- The Contractor shall check all tie-ins for line and level with existing before commencing any works and notify the Engineer of any discrepancies immediately in writing.
- It is the responsibility of the Contractor to locate any service apparatus in the vicinity of the works. BM Civil Engineering will accept no claims whatsoever in respect of any losses or damages caused in respect of such apparatus, however caused.
- It is the responsibility of the Contractor to execute the works at all times in strict accordance with the requirements of the Health and Safety At Work Act 1974, and the CDM Regulations 2015. The Contractor will be deemed to have allowed for full compliance, including full liaison with the Principal Designer within his rates.
- The Contractor is responsible for ensuring that all works are to the satisfaction of the Site Engineer, and is to include any necessary testing within his rates.
- The Contractor will be responsible for providing all necessary de-watering and trench support to execute the works in a satisfactory manner, and shall be deemed to have allowed for the same within his rates.
- All buried concrete products and mortar shall be made using sulphate resistant cement.
- No deep rooted trees or shrubs to be planted within 5m of a public highway or prospective public sewer.
- All highway works to be carried out to satisfy Leicestershire County Council's requirements and in accordance with Leicestershire Design Guide specifications.
- Traffic signs and road markings shall comply with the requirements of chapters 3, 4 & 5 of the Traffic Signs Manual as modified by the Traffic Signs Regulations and General Directions 2016.
- All road markings shall be laid in thermoplastic screed with added ballast and shall comply with the requirements of clause 1212 of the Specification for Highway Works.
- Sewers shall be constructed to the satisfaction of IWNL and in accordance with Appendix C of the UK Water Sewerage Sector Guidance 'Design and Construction Guidance' 2020.
- All pipes shall be laid with soffit-to-soffit connections unless otherwise stated.
- At pipe crossing points, pipe trench is to be lined with 1,000 gauge impermeable membrane to eliminate any chances of cross contamination.
- Infill covers and frames within block paved areas are not to be used.
- Essements at any change of width should be 3.0m either side of the pipes shown.
- All manhole covers to be 675 x 675mm with cover and frame to maintain 600 x 600mm clear opening, unless otherwise stated, in accordance with BS EN 124 Class D400 and embossed with FW or SW as appropriate.
- Covers and frames to be kitemarked.
- Protective concrete cover slabs to be used on pipes in non-trafficked areas which don't achieve 900mm cover and in trafficked areas that don't achieve 1200mm cover.
- Precast concrete manhole rings are not to be cut under any circumstances.
- All proposed landscaping and tree planting adjacent to sewers shall be in accordance with clauses 85.110 & 87.6.
- All drainage offered for adoption has been designed to not attenuate flows in excess of 1.30 year storm return period.

P12	24.11.25	S17 added to avoid clash with HV and easement updated as agreed with IWNL 21.11.2025	BRM	-
P10	03.10.25	Layout updated to include repositioning of plots 27 & 40 and mirroring of plot 25.	BRM	-
P09	24.04.25	Dropped crossing removed from the front of plots 19/20.	BRM	-
P08	24.04.25	F7 position updated to ensure a maximum run length of 90m is not exceeded as requested.	BRM	-
P07	27.03.25	IL discrepancy on F5 updated.	BRM	-
P06	27.03.25	Areas updated to suit changes to parcel serving plots 18-31.	BRM	-
P05	20.03.25	Drainage areas coordinated with amended site layout.	BRM	-
P04	17.02.25	Impermeable areas coordinated with plot repositioning and mirroring as required.	BRM	-
P03	04.02.25	Gravity solution into existing STW foul sewer shown following survey of existing asset depth.	BRM	-

Previous revisions removed for clarity.

Rev	Date	Amendments	By	Chk
-----	------	------------	----	-----

BM Civil Engineering Ltd
55 Priory Close
Breedon on the Hill
DE73 8LF
T: 07875 636281
bmceengineering.co.uk

Client

ALLISON HOMES

Project

MAIN STREET
STANTON UNDER BARDON

Drawing Title


DRAINAGE AREA PLAN

Status

FOR APPROVAL

Scale	Drawn	Checked	Date
1:500 @ A1	BRM	-	13.01.25

Drawing Number	Revision
24005-BMC-25-XX-DR-C-501	P11



Copyright © BMc Engineering Ltd

Health and safety symbols refer to reference numbers indicated on Designers Risk Assessment number: 24005-BMC-24-XX-HS-C-0001

Health & Safety Information Key

- Used to provide design specific safety information that may not be obvious to a competent contractor but may be useful
- Used to restrict/prevent a possible action, e.g. stop construction traffic from entering an area
- Used to warn of significant design hazards, adding recommendations
- Used to encourage a positive action, e.g. use of robust protection for inspection chambers

NOTE: DESIGN SUBJECT TO SECTION 104
APPROVAL. ANY WORKS CARRIED OUT PRIOR TO
APPROVALS AND AGREEMENTS BEING IN PLACE
ARE DONE SO AT DEVELOPER'S OWN RISK.