



W: WWW.GLAMPITECT.CO.UK
E: CONTACT@GLAMPITECT.CO.UK
T: 0131 202 9002

KEY TO SYMBOLS

LOW LEVEL LIGHTING
BOLLARD 5no. TO BE
INSTALLED, LIGHTING
SPREAD SHOWN AS 5m

Low Level Path Lighting


Lanea Path Lighting Bollard with PIR sensor.

Benefits:

- LED mains wired.
- Low level height, only 40cm high.
- LED bulbs installed into this pillar lamp are in such a manner that they shine downwards onto cascading reflectors, keeping all light at low level.
- Integrated PIR sensor, keeping light levels low and only on when required.
- Range 2-8metres, set at 5m as shown.
- Lighting duration (5 seconds to 6 minutes) are configurable.
- Detects movement at an angle of 90 degrees.

22.01.25	Blue and red line boundaries amended for LPA, Hedgerow, fenceline, and PROW bufferzone added.	A	EF
Date	Description	Rev	By

Revision Description

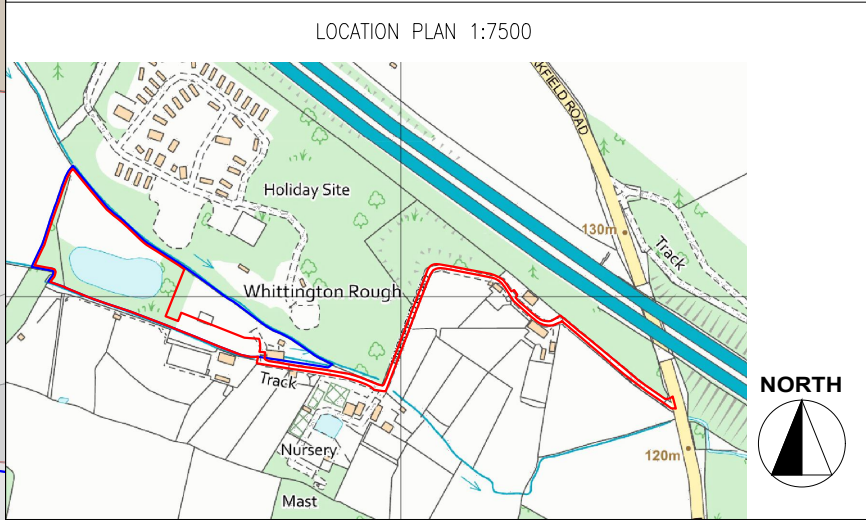

Project:
Proposed Glamping Site - For Ryan Pasch
Grid Reference - SK 49264 07502
LE6 0LU

Drawing Title:
PROPOSED LIGHTING PLAN

Drawing Number:
240239-01-07

Revision:	A
Date:	10/09/2024
Scale:	1:200 @ A1
Drawn By:	EF
CAD Dwg File:	-
Checked By:	TA

Issue Status:
Full Planning Application

OWNERSHIP BOUNDARY
AREA = 17,574 m2

SITE BOUNDARY
SITE AREA = 14,888 m2

