

NEOS LED



Designer : Michel Tortel



Robust and versatile luminaire for all road and urban applications

Compact yet powerful, light yet robust, the NEOS LED range provides multiple configurations to create comfort and security in numerous road and urban environments.

Available in three sizes and with multiple light distributions, the NEOS LED provides a high-performing and energy-efficient lighting solution for pedestrian areas, streets, roads, car parks and bike paths.

This wide range of multi-purpose luminaires is designed to ensure that the lighting meets the real needs of the place to be lit.



IP 66

IK 08



005
certification



URBAN &
RESIDENTIAL
STREETS



BRIDGES



BIKE &
PEDESTRIAN
PATHS



RAILWAY
STATIONS &
METROS



CAR PARKS



LARGE AREAS



SQUARES &
PEDESTRIAN
AREAS



ROADS &
MOTORWAYS

Concept

The NEOS LED range combines the energy efficiency of LED technology with the photometric performance of the LensoFlex® concept developed by Schröder. The NEOS LED luminaires are composed of a two-piece housing made of painted die-cast aluminium. The glass protector is sealed onto the cover.

Mounting by means of a fork enables the inclination to be adjusted precisely on-site. The versatility of this fork makes it perfect for mounting on a surface, a wall or on a pole/bracket.

The NEOS LED luminaires are available in three sizes to suit numerous outdoor lighting applications.

As an option, these connected-ready luminaires can be equipped with a NEMA 7-pins or a Zhaga socket.



The 3 sizes of NEOS LED make it suitable for multiple outdoor lighting applications.



As an option, NEOS LED can be equipped with a NEMA or a Zhaga socket.

TYPES OF APPLICATION

- URBAN & RESIDENTIAL STREETS
- BRIDGES
- BIKE & PEDESTRIAN PATHS
- RAILWAY STATIONS & METROS
- CAR PARKS
- LARGE AREAS
- SQUARES & PEDESTRIAN AREAS
- ROADS & MOTORWAYS

KEY ADVANTAGES

- LensoFlex®2 photometric engine with photometry adapted to various applications
- Adjustable inclination on-site
- FutureProof: easy replacement of the photometric engine and electronic assembly on-site
- Connected-ready
- Quality recyclable materials
- Compatible with the Schröder EXEDRA control platform
- Versatile range of luminaires to enhance diverse urban landscapes



Mounting by means of a fork enables the inclination to be adjusted on-site.



Tool less opening for easy installation and maintenance.



LensoFlex®2


LensoFlex®2 is based upon the addition principle of photometric distribution. Each LED is associated with a specific PMMA lens that generates the complete photometric distribution of the luminaire. The number of LEDs in combination with the driving current determines the intensity level of the light distribution.



Back Light control

As an option, the LensoFlex®2 and LensoFlex®4 modules can be equipped with a Back Light control system.

This additional feature minimises light spill from the back of the luminaire to avoid intrusive light towards buildings.

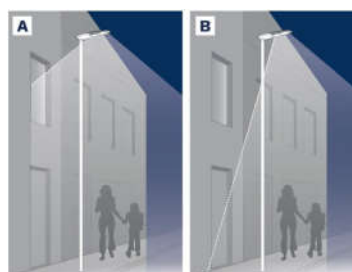


A. Without Back Light control | B. With Back Light control



Custom dimming profile

Intelligent luminaire drivers can be programmed with complex dimming profiles. Up to five combinations of time intervals and light levels are possible. This feature does not require any extra wiring.

The period between switching on and switching off is used to activate the preset dimming profile. The customised dimming system generates maximum energy savings while respecting the required lighting levels and uniformity throughout the night.

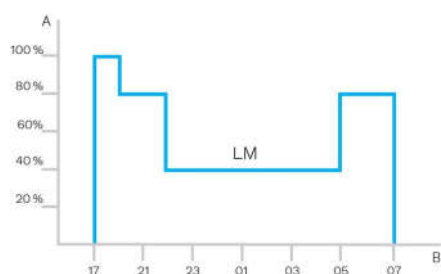

A. Dimming level | B. Time



PIR sensor: motion detection

In places with little nocturnal activity, lighting can be dimmed to a minimum most of the time. By using passive infrared (PIR) sensors, the level of light can be raised as soon as a pedestrian or a slow vehicle is detected in the area.

Each luminaire level can be configured individually with several parameters such as minimum and maximum light output, delay period and ON/OFF duration time. PIR sensors can be used in an autonomous or interoperable network.





The Zhaga consortium joined forces with the DiiA and produced a single Zhaga-D4i certification that combines the Zhaga Book 18 version 2 outdoor connectivity specifications with the DiiA's D4i specifications for intra-luminaire DALI.

Cost-effective solution


A Zhaga-D4i certified luminaire includes drivers offering features that had previously been in the control node, like energy metering, which has in turn simplified the control device therefore reducing the price of the control system.

Standardisation for interoperable ecosystems

As a founding member of the Zhaga consortium, Schröder has participated in the creation of, and therefore supports, the Zhaga-D4i certification program and the initiative of this group to standardise an interoperable ecosystem. The D4i specifications take the best of the standard DALI2 protocol and adapt it to an intra-luminaire environment but it has certain limitations. Only luminaire mounted control devices can be combined with a Zhaga-D4i luminaire. According to the specification, control devices are limited respectively to 2W and 1W average power consumption.

Certification program

The Zhaga-D4i certification covers all the critical features including mechanical fit, digital communication, data reporting and power requirements within a single luminaire, ensuring plug-and-play interoperability of luminaires (drivers) and peripherals such as connectivity nodes.

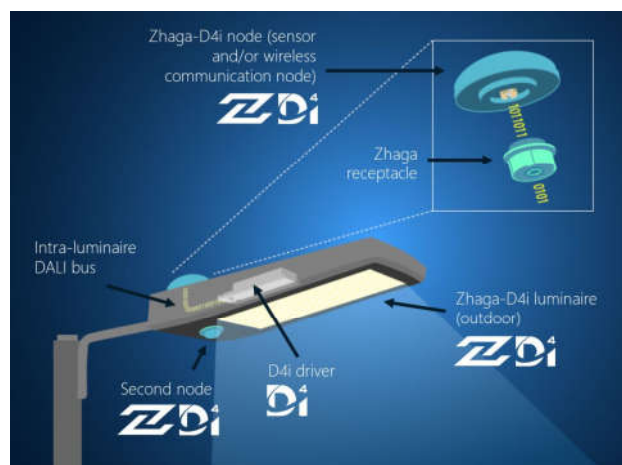



Schröder EXEDRA is the most advanced lighting management system on the market for controlling, monitoring and analysing streetlights in a user-friendly way.



Tailored experience

Schröder EXEDRA includes all advanced features needed for smart device management, real-time and scheduled control, dynamic and automated lighting scenarios, maintenance and field operation planning, energy consumption management and third-party connected hardware integration. It is fully configurable and includes tools for user management and multi-tenant policy that enables contractors, utilities or big cities to segregate projects.

A powerful tool for efficiency, rationalisation and decision making

Data is gold. Schröder EXEDRA brings it with all the clarity managers need to drive decisions. The platform collects massive amounts of data from end devices and, aggregates, analyses and intuitively displays them to help end-users take the right actions.

Protected on every side

Schröder EXEDRA provides state-of-the-art data security with encryption, hashing, tokenisation, and key management practices that protect data across the whole system and its associated services.

Standardisation for interoperable ecosystems

Schröder plays a key role in driving standardisation with alliances and partners such as uCIFI, TALQ or Zhaga. Our joint commitment is to provide solutions designed for vertical and horizontal IoT integration. From the body (hardware) to the language (data model) and the intelligence (algorithms), the complete Schröder EXEDRA system relies on shared and open technologies.

Schröder EXEDRA also relies on Microsoft™ Azure for cloud services, provided with the highest levels of trust, transparency, standards conformance and regulatory compliance.

Breaking the silos

With EXEDRA, Schröder has taken a technology-agnostic approach: we rely on open standards and protocols to design an architecture able to interact seamlessly with third-party software and hardware solutions. Schröder EXEDRA is designed to unlock complete interoperability, as it offers the ability to:

- control devices (luminaires) from other brands
- manage controllers and to integrate sensors from other brands
- connect with third-party devices and platforms

A plug-and-play solution

As a gateway-less system using the cellular network, an intelligent automated commissioning process recognises, verifies and retrieves luminaire data into the user interface. The self-healing mesh between luminaire controllers enables real-time adaptive lighting to be configured directly via the user interface.

GENERAL INFORMATION

Recommended installation height	4m to 8m 13' to 26'
FutureProof	Easy replacement of the photometric engine and electronic assembly on-site
Driver included	Yes
CE mark	Yes
ENEC certified	Yes
ROHS compliant	Yes
Zhaga-D4i certified	Yes
French law of December 27th 2018 - Compliant with application type(s)	a, b, c, d, e, f, g
BE 005 certified	Yes
Testing standard	LM 79-08 (all measurements in ISO17025 accredited laboratory)

HOUSING AND FINISH

Housing	Aluminium
Optic	PMMA
Protector	Tempered glass
Housing finish	Polyester powder coating Optional "seaside" polyester powder coating (C4 according to the ISO 9223-2012 standard)
Standard colour(s)	AKZO grey 900 sanded
Tightness level	IP 66
Impact resistance	IK 08
Access for maintenance	Tool-less access to gear compartment

· Any other RAL or AKZO colour upon request

OPERATING CONDITIONS

Operating temperature range (Ta)	-30°C up to +50°C / -22°F up to 122°F with wind effect
----------------------------------	--

· Depending on the luminaire configuration. For more details, please contact us.

ELECTRICAL INFORMATION

Electrical class	Class I EU, Class II EU
Nominal voltage	220-240V – 50-60Hz
Surge protection options (kV)	4 6 10
Control protocol(s)	1-10V, DALI
Control options	AmpDim, Bi-power, Custom dimming profile, Photocell
Socket	Zhaga (optional) NEMA 7-pin (optional)
Associated control system(s)	Schröder EXEDRA Schröder ITERRA
Sensor	PIR (optional)

OPTICAL INFORMATION

LED colour temperature	2700K (WW 727) 3000K (WW 730) 3000K (WW 830) 4000K (NW 740)
Colour rendering index (CRI)	>70 (WW 727) >70 (WW 730) >80 (WW 830) >70 (NW 740)
ULOR	0%
ULR	0%

· ULOR may be different according to the configuration. Please consult us.

· ULR may be different according to the configuration. Please consult us.

LIFETIME OF THE LEDS @ TQ 25°C

All configurations	100,000h – L90
--------------------	----------------



DIMENSIONS AND MOUNTING

AxBxC (mm inch)	NEOS 1 LED : 360x100x320 14.2x3.9x12.6
	NEOS 2 LED : 441x140x398 17.4x5.5x15.7
	NEOS 3 LED : 600x160x500 23.6x6.3x19.7

Weight (kg lbs)	NEOS 1 LED : 3.4 7.5
	NEOS 2 LED : 7.7 16.9
	NEOS 3 LED : 19 41.8

Aerodynamic resistance (CxS)	NEOS 1 LED : 0.11
	NEOS 2 LED : 0.18
	NEOS 3 LED : 0.30

Mounting possibilities	Bracket enabling adjustable inclination
------------------------	---

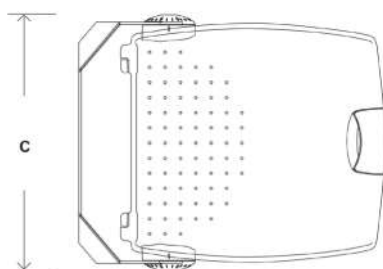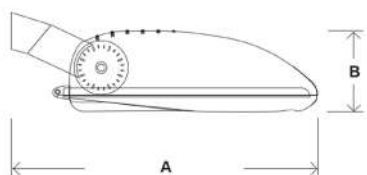



		Luminaire output flux (lm)								Power consumption (W)		Luminaire efficacy (lm/W)
		Warm White 727		Warm White 730		Warm White 830		Neutral White 740				
Number of LEDs	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Up to	
16	1000	3400	1100	3700	1000	3400	1100	3900	11	31	136	
24	1500	5000	1600	5600	1500	5000	1700	5800	15	44	144	

Tolerance on LED flux is $\pm 7\%$ and on total luminaire power $\pm 5\%$



		Luminaire output flux (lm)								Power consumption (W)		Luminaire efficacy (lm/W)
		Warm White 727		Warm White 730		Warm White 830		Neutral White 740				
Number of LEDs	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Up to	
32	2000	6100	2200	6800	2000	6100	2300	7100	20	54	145	
48	3000	9200	3400	10300	3000	9200	3500	10600	30	80	148	

Tolerance on LED flux is $\pm 7\%$ and on total luminaire power $\pm 5\%$



		Luminaire output flux (lm)								Power consumption (W)		Luminaire efficacy (lm/W)
		Warm White 727		Warm White 730		Warm White 830		Neutral White 740				
Number of LEDs	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Up to	
64	3900	12800	4300	14300	3900	12800	4500	14700	38	116	148	

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %

