


DO NOT SCALE OFF THIS DRAWING

NOTES

1. The contractor is responsible for verifying all site & setting out dimensions before commencing work.
2. This drawing is to be read in conjunction with all relevant Architectural and M&E drawings.
3. All dimensions in meters unless stated otherwise.

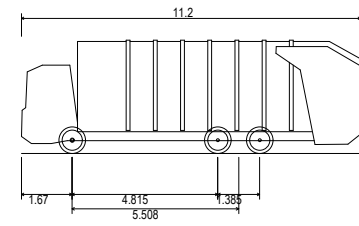

Phoenix 2 Duo (P2-15W with Elite 6x4 chassis)
Overall Length 11.200m
Overall Width 2.530m
Overall Body Height 3.751m
Min Body Ground Clearance 3.34m
Track Width 2.500m
Lock to lock time 4.00s
Kern to Kern Turning Radius 8.500m

LEGEND:

- Site Boundary
- Wheel track (Forward manoeuvre) Shows outer limit of wheel entirely within the carriageway. Not encroaching on any kerbs
- Wheel track (Reverse manoeuvre) Shows outer limit of wheel entirely within the carriageway. Not encroaching on any kerbs
- Body track - Shows the outer limit of body generally within carriageway, may overhang the verge when turning where necessary
- BCP Bin Collection Point
- Refuse Operative Walking Distance (Max 25m from Vehicle)
- Resident Walking distance (Max 30m from Bin Storage Point to Bin Collection Point)

Revision History					
Rev	Comment	By	Chkd	Appr	Date
A04	FOR APPROVAL - Updated to latest site layout	PJ	TZ	SB	03/06/2026
A03	UPDATED AS PER SITE LAYOUT DATED 06/05/26	NS	PJ	SB	27/05/2026
A02	UPDATED TO SUIT NEW SITE LAYOUT	BS	TZ	SB	26/04/2026
A01	FOR APPROVAL	BS	SK	SB	25/11/2025
Current Revision					
A05	FOR APPROVAL - Updated to latest site layout	PJ	TZ	SB	05/06/2026

FOR APPROVAL

ALLISON HOMES

robert west
proesgroup
1 Paris Garden
London
SE1 1ND
t: 0203 773 7880
www.robertwest.co.uk

Project
MARKFIELD

Drawing Title
SWEPT PATH ANALYSIS
REFUSE VEHICLE

RWCL Internal Register reference: 5964-003

Scales @ A1

3000-A05

© Robert West Consulting 2019. All rights reserved.

Scale 1:500 @ A1 - 1:1000 @ A3
10m 0 10m 20m 30m 40m 50m

Trim / crown lift trees
to facilitate paths if
required