


These filters are designed for use in commercial kitchens and ventilation from food preparation areas where their primary function is to reduce grease carry over from the cooking area.

These Filters are rated at 1.5m/sec - where the pressure drop is 15Pa for 45mm filters and less than 10Pa for 20mm filters.

Features

- Aluminium Frame
- Strong rolled frame construction
- Scratch Free outer surface
- Fold down handles
- Drain Holes
- Low Pressure Drop

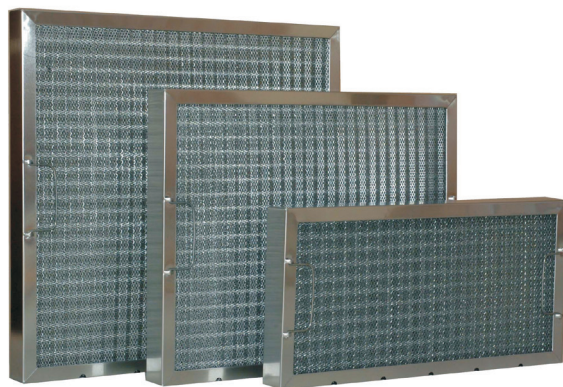


Construction

These filters are manufactured by rolling a metal frame which holds a series of expanded and corrugated metal layers. These layers create an impingement barrier which catches grease from the extract air.

STANDARD SIZES

Jasun Envirocare always specify filters as Height (H) x Width (W) This is particularly important with baffle filters because the handles will always go on the H edge, the blades will always run along the H edge, and the drain holes will always be in the W edge

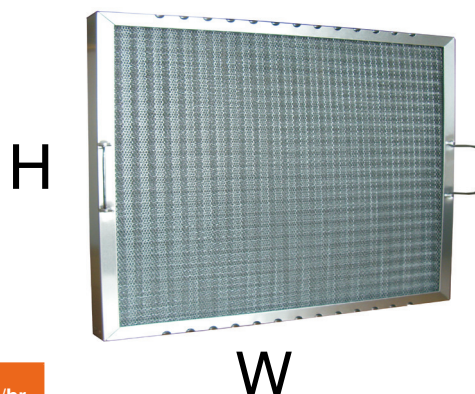

Part No.	Nominal Size Inches	Height (mm)	Width (mm)	Depth (mm)	Rated Airflow m ³ /hr
GF2-1020	10 x 20 x 2	241	495	45	644
GF2-1212	12 x 12 x 2	292	292	45	460
GF2-1216	12 x 16 x 2	292	394	45	621
GF2-1224	12 x 24 x 2	292	594	45	937
GF2-1616	16 x 16 x 2	394	394	45	838
GF2-1620	16 x 20 x 2	394	495	45	1053
GF2-1625	16 x 25 x 2	394	622	45	365
GF2-1818	18 x 18 x 2	445	445	45	1069
GF2-2010	20 x 10 x 2	495	241	45	644
GF2-2016	20 x 16 x 2	495	394	45	1053
GF2-2020	20 x 20 x 2	495	495	45	1323
GF2-2025	20 x 25 x 2	495	622	45	1663
GF2-2424	24 x 24 x 2	597	597	45	1925

Pressure drop (Pa) Vs Velocity (m³/hr.)
GF2 Baffle Filter

