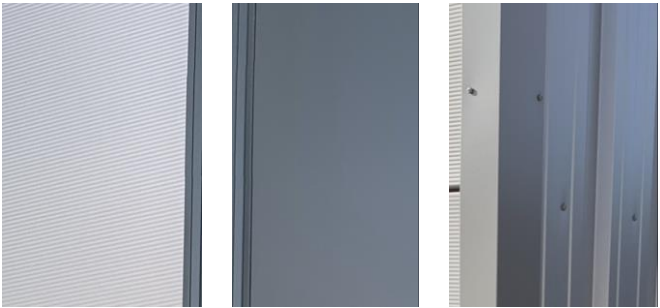



4594 – MATERIALS SCHEDULE / PROPOSED TWO STOREY BOXING GYM / HINCKLEY

Building Element	Specification	Image / Sample Photo
Damp Proof Course	5No. Courses of Weinerberger Solid Blue Class A Engineering Brick	
External Wall Cladding	1) Kingspan KS Mini Micro-Rib Wall Panel Laid Horizontally. Colour Spectrum Metallic Silver. 2) Kingspan KS Quadcore Evolution Axis Laid Horizontally. Colour Spectrum Metallic Greyrock. 3) Kingspan KS1000RW Wall Panel Laid Vertically. Colour Spectrum Metallic Silver.	 Left (1) / Middle (2) / Right (3) colour to match (1)
Soffits, Fascias & Rain Water goods	Aluminium Polyester Powder coated preformed goods. Colour RAL7016 Anthracite Grey	 

Roof Cladding	Kingspan KS1000RW Wall Panel. Colour Goose Wing Grey.	
External Doors & Windows	External Quality UPVC Doors & Windows with Eurostyle Stainless Steel Handles & Associated Ironmongery. Polyester Powdercoated or Factory Finished RAL7016 Anthracite Grey. Entrance Doors to be glazed with long bar pull handles. Curtain walling to be aluminium finished RAL7016 Anthracite Grey.	  
Brise Solei	Where indicated on elevations, provide Brise Solei above windows. Polyester Powdercoated or Factory Finished RAL7016 Anthracite Grey.	

External Works Element	Specification	Image / Sample Photo
Driveway, Carparking, Gravel Margin to Building	Hardwearing limestone chipping by Breedon Aggregates or similar approved. Colour to be iron grey / Shierglas Silver or similar. Laid over permeable plastic grate retaining system.	
Block Paving to Disabled Bays Only	Brett Beta Block Paving Colour Silver Haze.	
Parking Demarcations	1) To disabled parking, use white marker block pavers to distinguish bay. 2) To gravel parking, use white plastic inserts.	(1) Left / (2) Right

Feature Paving Slabs	600mm x 600mm x 50mm square paving slabs by Tobermore. Mayfair range Colour: Silver. Associated Kerbs to be Tobermore Fusion Kerb Colour: Silver	
Paving Slabs to Perimeter	600mm x 600mm x 50mm Concrete textured flag paving slabs. Associated Kerbs to be Standard Half Battered Concrete Kerbs by Marshalls.	
Driveway & Parking Illuminated Bollards	Mansfield Semi-Domed Top Illuminated 980mm high x 156mm diameter External Parking Bollard Light.	

Covered Cycle Store

Broxap Lightwood Cycle Shelter

