Notes:

1. French drain to be constructed to Bloors Standard detail (300mm wide, 500mm deep)
2. Pipe to be 100mm diameter.
3. Perforated pipe to be wrapped in terram
4. 40mm loose stone to be used as fill
5. Pipe to sit on a bed of class S pipe bedding
6. Full pitch cut and fill information shown on MI100-EN-269 (PHASE 4&7 Updated Cut and Fill)

Sports Pitch Volumes:

Pitch 1:
Cut: 1,750.26m3
Fill: 1,682.33m3
= 67.93m3 Surplus


Pitch 2:
Cut: 4,234.51m3
Fill: 535.89m3
= 3,698.61m3 Surplus


Pitch 3:
Cut: 3,713.50m3
Fill: 71.58m3
= 3,641.92m3 Surplus


TOTAL MATERIAL GENERATED FROM PITCHES = 7,340.53m3

All levels have a tolerance of + or - 450mm.




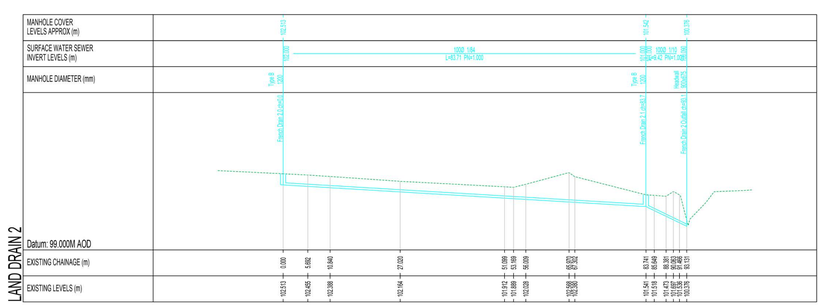


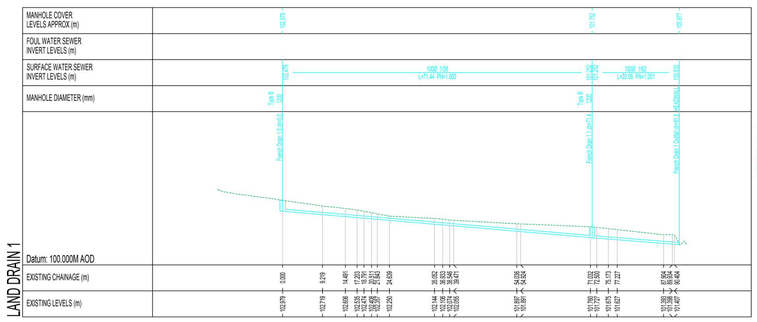

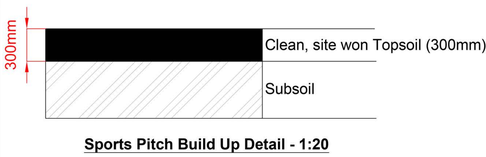

Sports Pitch Build Up Detail - 1:20

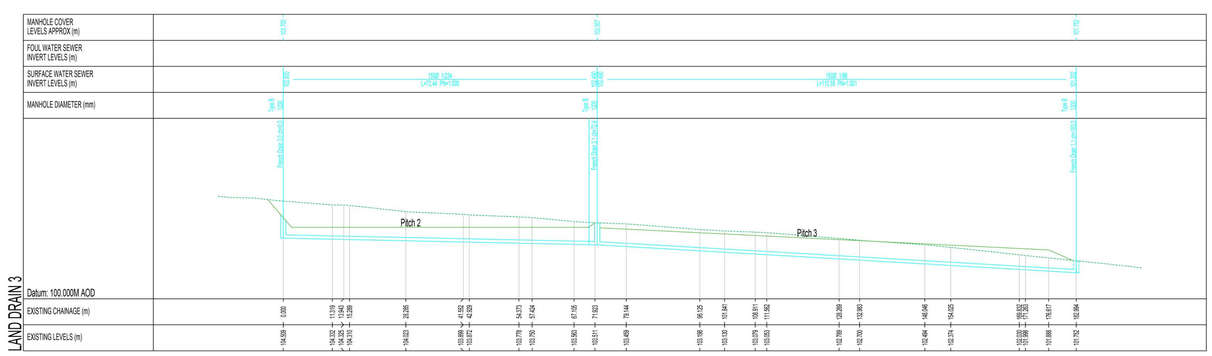

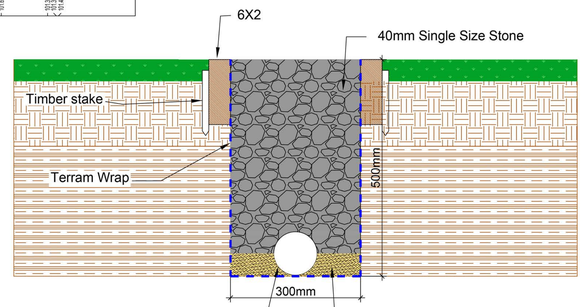

Land Drain Detail for Sport Pitches
1:50

Revision.			
A	Existing topo levels added	10.02.23	DS
B	Land Drains added.	20.02.23	DS
C	Large pitch moved to the east to avoid the clubhouse building. Topsoil detail added. Mounds and their volumes added.	12.04.23	DS
D	Updated to latest sports pitch layout.	29.08.23	DS
E	Further drain added. Pitch make up detail updated with further topsoil information.	19.03.24	DS
F	Updated to landscaping layout. Paths design to tie in with pitches and boundaries.	13.05.24	DS

Proposed Development at
NORMANDY WAY
HINCKLEY

Sports Pitch Levels

DATE: **24.06.22**
SCALE: **1:500 @ A1**
DRAWN: **DS**
CHECKED: **--**

BLOOR HOMES

Drawing No. MI100-EN-261F