DCPLAN

CAR PORT CONSTRUCTION

150x150 OAK POSTS TO FRONT ELEVATION WITH T+G GATES (1 PAIR 2400 wide AND 1 N. 900 PERSONEL GATE).


47 x 75 C16 SOFTWOOD FRAMING WITH UPRIGHT AT 600 c/s AND 25x150 YORK STYLE BOARDS

47x150 C16 RAFTERS AT 600 c/s WITH SOLID BLOCKING AND FIXED TO 47x150 C16 WALLPLATE BOLTED TO WALL OF HOUSE.


CLEAR PERSPEX ROOFING SHEETS FOR NATURAL LIGHT AND PLASTIC GUTTERING AND RWP TO MATCH EXISTING.

DECORATION TO MATCH EXISTING


FENCE AND GATE (EXISTING) AT REAR ELEVATION RETAINED.

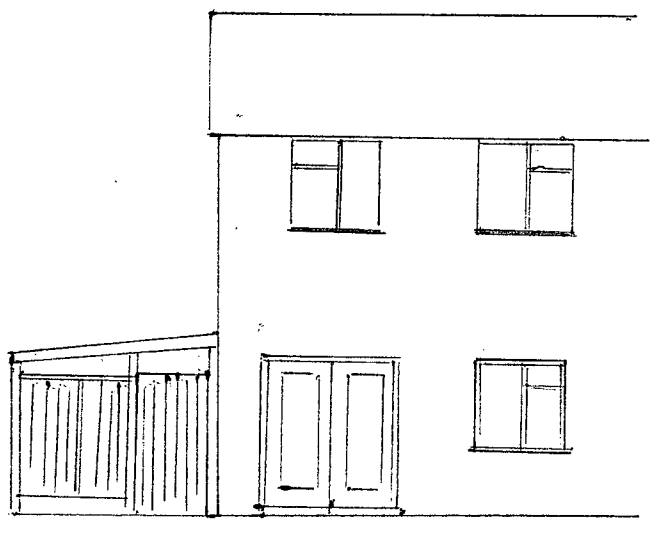


REAR ELEVATION

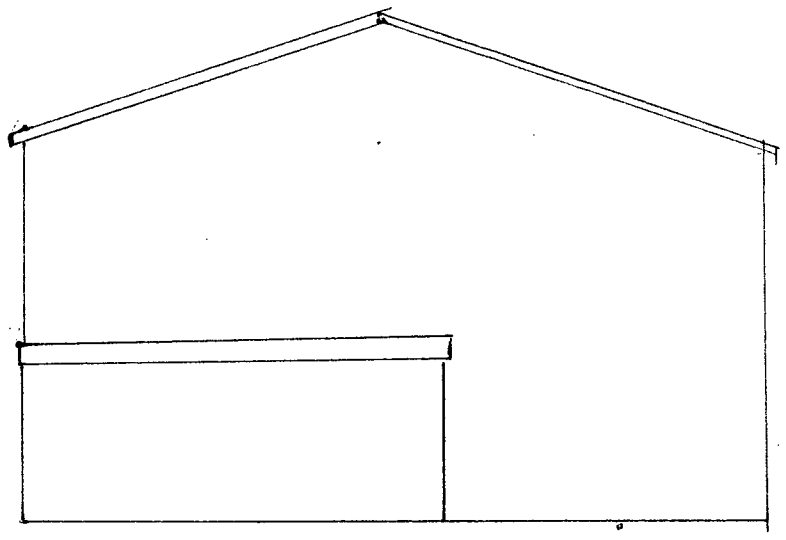

SIDE ELEVATION

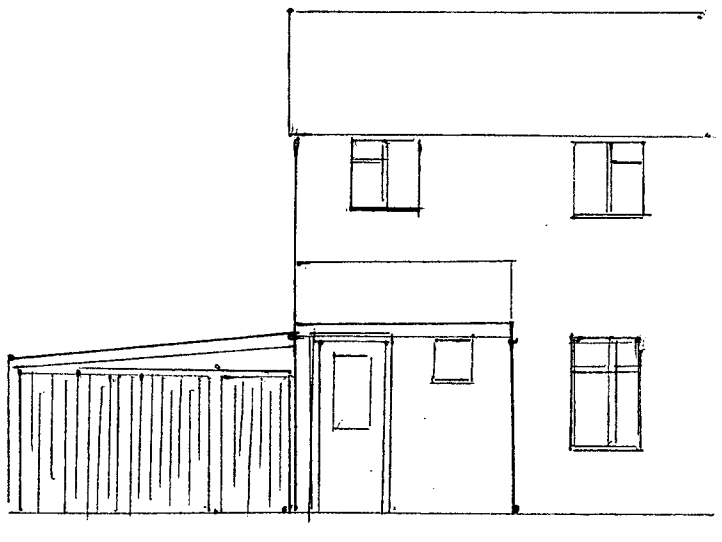

FRONT ELEVATION

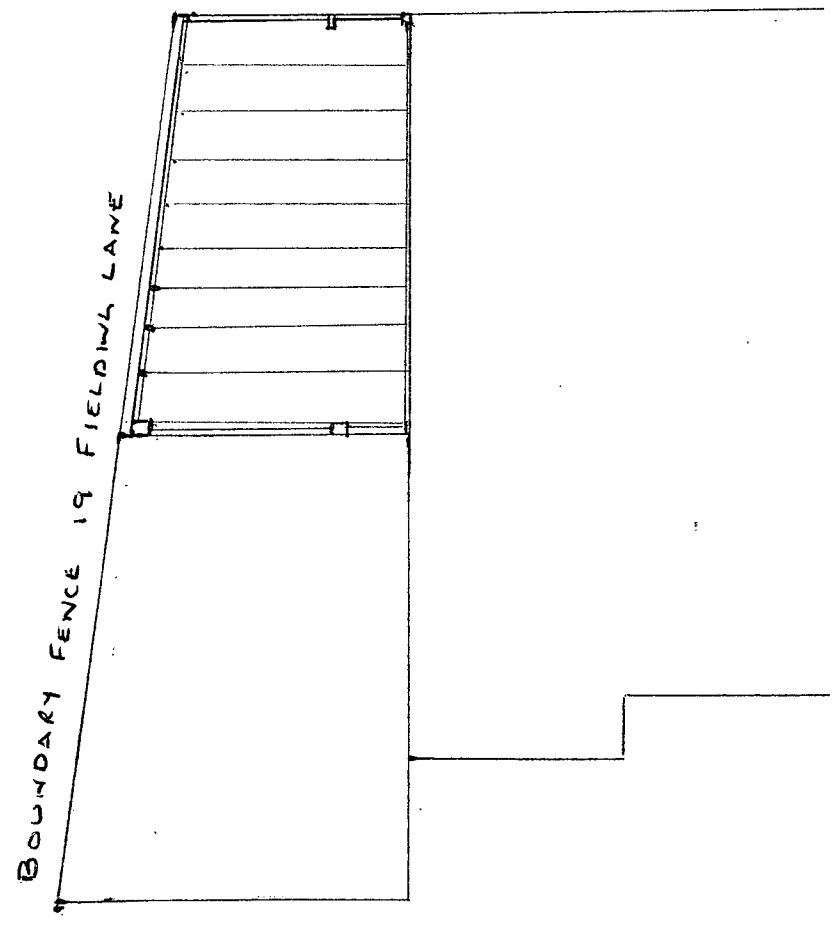

PLAN

ERECTION OF CAR PORT ON SIDE OF 21 FIELDING LANE RATBY

SCALE 1:100 3/8/2011