

dunbrik

Telephone: 01924 373694
Email: tech@dunbrik.co.uk

HEIGHT

FROM FFL TO U/S OF CHIMNEY POT

Required: 9600mm

Achieved: 9539mm

Notes





Stove connecting pipe to be supplied by others.

Stove to be installed in accordance with appliance manufacturers instructions.

Provide PCC lintel to front of 200SCB stove connection block in order to provide support and span width of recess. Lintels to be calculated by structural engineer and supplied by others.

Provide additional PCC lintel to front of supporting lintels in order to make up depth of fireplace recess. Lintels to be supplied by others.

We have taken as cavity being reduce as indicated in order to accommodate 260mm overall diameter flue system.

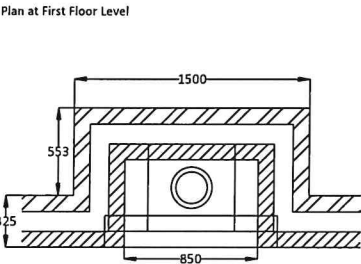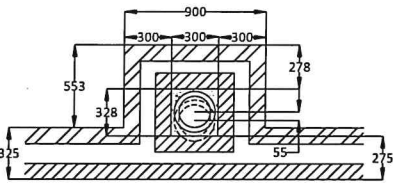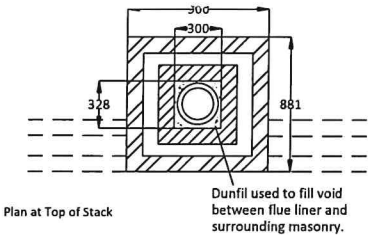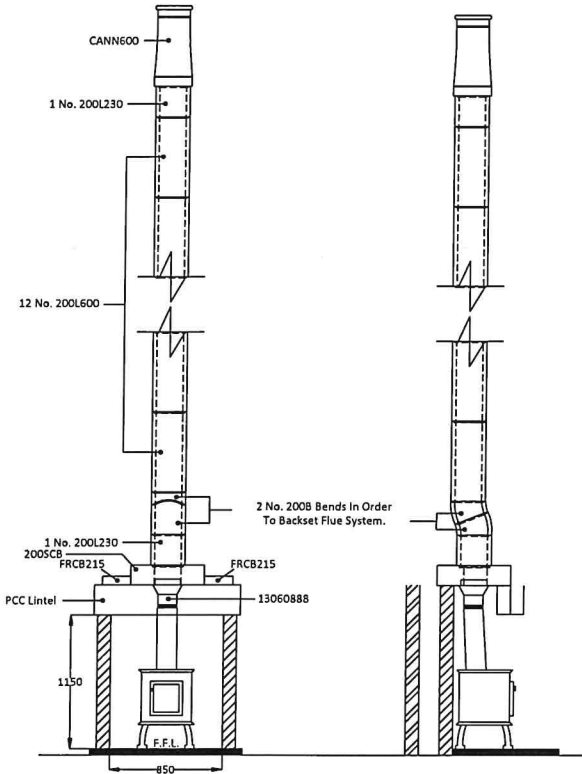

Plan at Ground Floor Level
Dunbrik A1 Concrete Flue Liner System to BS EN 1857

Please have your architect check this estimate to your drawings to ensure it meets both your requirements and current building regulations, British standards and codes of practice.

ALL DIMENSIONS ARE SHOWN IN MILLIMETRES
NOT TO SCALE