All electrical work required to meet the requirements of Part P (Electrical Safety) must be designed, installed, inspected and tested by a person competent to do so. Prior to completion the Council will be required to be satisfied that Part P has been complied with. An appropriate BS7671 electrical installation certificate is required to be issued for the work by a person competent to do so to the Council.

18/00173/FUL
19 FEB 2018

PROPOSED CONSERVATORY

for


Mr & Mrs CARUTHERS

No 2 DOVE CLOSE


HINCKLEY.

LE10 0RY

SCALE :- 1/100

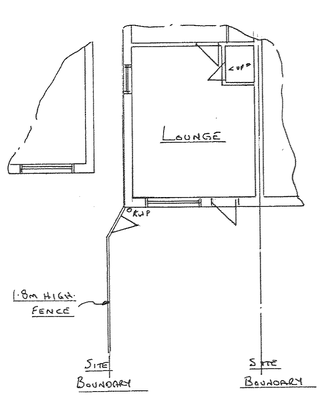

EXISTING PLAN

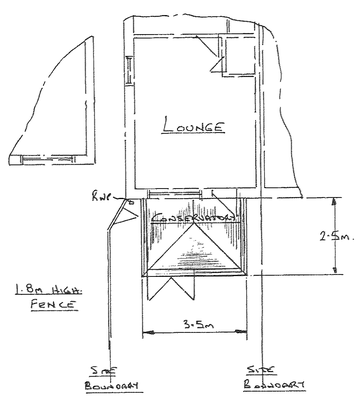

PROPOSED PLAN

NOTES !!

CONSERVATORY :- BRONZE POLYCARBONATE SHEETS / UPVC AND SAFETY GLAZING TO BS6206. NEW SKINED MASONRY FACING WALLS ON CONCRETE BASE TO BE SUPPLIED AND INSTALLED BY SPECIALISTS.

FLOOR :- FINISH TO CLIENTS CHOICE ON 65mm SAND/CEMENT SCREED ON 125mm CONC. BASE 1200g POLYTHENE DPM. ON 50mm SAND BLINDING AND MIN 100mm CONSOLIDATED HARDCORE BED


BRICKS BELOW DPC :- TO BE CLASS B ENGINEERING BRICKS.

FOOTINGS :- CONCRETE 1:2:6 600mm WIDE x 200mm THICK DEPTH TO L.A. SATISFACTION OR MANUFACTURERS RECOMMENDATIONS


STORM DRAINAGE :- 100mm GUTTERING TO EXIST. RWP.

ALL DRAINS WITHIN 1m OF CONSERVATORY TO BE ENCASED IN 150mm CONC. SLEEVE. ANY DRAINS PASSING THRU' WALLS OF CONSERVATORY TO BE BRIDGED WITH CONC. LINTOL.


ALL DIMENSIONS, SERVICES, DRAIN RUNS + DETAIL TO BE CHECKED ON SITE BY BUILDER PRIOR TO COMMENCEMENT OF WORKS. BUILDER TO CARRY OUT ALL WORKS TO L.A. SATISFACTION. AND ACCEPT DESIGN LIABILITY. THIS DRAWING IS FOR PLANNING / BUILDING REGS PURPOSES ONLY + NOT A FULL WORKING DRAWING.

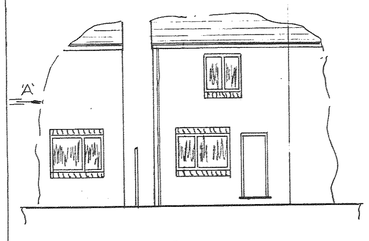


EXISTING REAR ELEVATION




EXISTING SIDE ELEVATION
ARROW 'A'

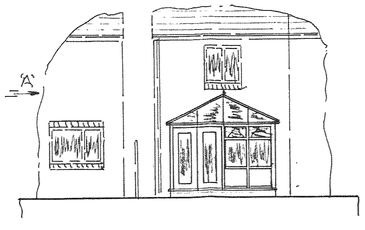

PROPOSED REAR ELEVATION



PROPOSED SIDE ELEVATION
ARROW 'A'



PROPOSED SIDE ELEVATION
ARROW 'B'

DEVELOPMENT SERVICES
19 FEB 2018
RECEIVED