

GEOPHYSICAL SURVEY REPORT

Land off Wellsborough Road, Market Bosworth

Client

ULAS

For

Jon Golby

Survey Report

SUMO-24446

OASIS Ref. No.

sumogeop1-536584

Date

11 September 2025



Survey Report SUMO-24446: Land off Wellsborough Road, Market Bosworth

Survey dates	8 September 2025
Field co-ordinator	Gabriel Mazeski BA
Field Team	Baeli Fern BSc (Hons)
Report Date	11 September 2025
CAD Illustrations	Thomas Cockcroft MSc MCIfA
Report Author	Thomas Cockcroft MSc MCIfA
Project Manager	Thomas Cockcroft MSc MCIfA
Report approved	Dr John Gater BSc DSc(Hon) MCIfA FSA

SUMO GeoSurveys
Suite1
Deer Park Business Centre
Woollas Hill
Eckington
Persore
Worcestershire
WR10 3DN
T: 01684 592266
www.sumoservices.com
geophysics@sumoservices.com

SUMO GeoSurveys is a trading name of SUMO Geophysics Ltd.

TABLE OF CONTENTS

1	LIST OF FIGURES	3
2	LIST OF APPENDICES	3
3	SURVEY TECHNIQUE	3
4	SUMMARY OF RESULTS	4
5	INTRODUCTION	4
6	RESULTS.....	5
7	DATA APPRAISAL & CONFIDENCE ASSESSMENT	5
8	CONCLUSION.....	5
9	REFERENCES	6
10	ARCHIVE	6

1 LIST OF FIGURES

Figure 01	NTS	Site Location
Figure 02	1:1500	Magnetometer Survey - Greyscale Plot
Figure 03	1:1500	Magnetometer Survey - Colour Plot
Figure 04	1:1500	Magnetometer Survey - Interpretation
Figure 05	NTS	Greyscale Plot / Interpretation / Market Bosworth tithe map of 1848 (ULAS 2025) / 2022 Aerial Image
Figure 06	1:1500	Minimally Processed Data - Greyscale Plot
Figure 07	1:1500	XY Trace Plots (clipped at +/-15nT)

2 LIST OF APPENDICES

Appendix A	Technical Information: Magnetometer Survey Methods, Processing and Presentation
Appendix B	Technical Information: Magnetic Theory
Appendix C	OASIS Data Collection Sheet
Appendix D	Data Management Plan & Archive Selection Strategy

3 SURVEY TECHNIQUE

- 3.1 Detailed magnetic survey (magnetometry) was chosen as the most efficient and effective method of locating the type of archaeological anomalies which might be expected at this site. All survey techniques followed the guidance set out by ClfA (2020) and the European Archaeology Council (EAC) (2016).

Bartington Cart System Traverse Interval 1.0m Sample Interval 0.125m

The only processes performed on data are the following unless specifically stated otherwise:

Zero Mean Traverse	This process sets the background mean of each traverse to zero. The operation removes instrument striping effects and edge discontinuities over the whole of the data set.
--------------------	--

4 EXECUTIVE SUMMARY OF RESULTS

- 4.1 A magnetometer survey of 3.5 hectares of land off Wellsborough Road, Market Bosworth has not recorded any magnetic responses that could be interpreted as being of definite archaeological interest. A few uncertain anomalies are probably due to natural processes, agricultural practises and buried ferrous debris. Two former field boundaries and several land drains have also been marked. Zones of magnetic disturbance have been detected and are likely to have been caused by spreads of modern agricultural debris and/or landscaping.

5 INTRODUCTION

- 5.1 **SUMO GeoSurveys** was commissioned to undertake a geophysical survey of an area outlined for development. This survey forms part of an archaeological investigation being undertaken by **ULAS** on behalf of **Jon Golby**.

5.2 Site Details

NGR / Postcode	SK 38858 03106 / CV13 6FA
Location	The site is located 7km south of Ibstock and due west of Market Bosworth. The survey area is bounded to the north by Wellsborough Road, to the west by Bosworth Water Park, and to the east by Market Bosworth Sports Club.
HER	Leicestershire HER
OASIS Ref. No.	sumogeop1-536584
District	Hinckley and Bosworth District (B)
Parish	Market Bosworth CP
Topography	Flat
Land Use	Pasture
Geology	Bedrock: Gunthorpe Member – Mudstone
(BGS 2025)	Superficial: Bosworth Clay Member - Clay and silt
Soils (CU 2025)	Soilscape 18: Slowly permeable seasonally wet slightly acid but base-rich loamy and clayey soils
Survey Methods	Magnetometer survey (fluxgate gradiometer)
Study Area	3.5 ha

5.3 **Archaeological Background** (ULAS 2025)

- 5.3.1 An archaeological desk-based assessment has been prepared by University of Leicester Archaeological Services (ULAS) for land east of Bosworth Water Park, Wellsborough Road, Market Bosworth, Leicestershire CV13 6PD. The Historic Environment Record (HER) for Leicestershire and Rutland records few known archaeological sites within a 1km radius of the PDA. There are some findspots for prehistoric, Roman and medieval artefacts, and the PDA lies outside the historic core of the town of Market Bosworth. The canal and railway, a brickworks and railway associated buildings are the only postmedieval / modern features recorded on the HER. Therefore, there is Low potential for archaeology of all periods within the PDA, although this potential is largely unattested due to the lack of archaeological work that has been undertaken in the vicinity.

5.4 **Aims and Objectives**

- 5.4.1 To locate and characterise any anomalies of possible archaeological interest within the study area.

6 RESULTS

6.1 *Gaps in the data on the north-west periphery of the sites were caused by mounds of earth which rendered those parts unsurveyable.*

6.2 ***Probable / Possible Archaeology***

6.2.1 No magnetic responses have been recorded that could be interpreted as being of definite archaeological interest.

6.3 ***Uncertain***

6.3.1 A couple trends and discrete pit-like responses have been detected in the survey which have been categorised as *Uncertain*. They lack the defined morphology of anomalies that would normally warrant an archaeological interpretation. The trends are likely to be due to natural or agricultural processes, while the pit-like responses are probably due to buried ferrous debris.

6.4 ***Former Field Boundary – Corroborated***

6.4.1 Two linear anomalies are visible in the magnetic data which correspond with the alignments of former field boundaries that are recorded on 1848 Tithe Mapping (see Figure 05).

6.5 ***Agricultural – Land Drains***

6.5.1 Several linear responses have been recorded in the survey which mark the routes of land drains.

6.6 ***Ferrous / Magnetic Disturbance***

6.6.1 Zones of magnetic disturbance have been detected throughout the magnetic data. They are likely to have been caused by spreads of modern agricultural debris and/or landscaping of the land parcel. A gap in the data plus the surrounding strong ferrous anomaly in the north of the site was caused by agricultural equipment in the field. Other ferrous responses close to boundaries are due to adjacent fences and gates. Smaller scale ferrous anomalies ("iron spikes") are present throughout the data and are characteristic of small pieces of ferrous debris (or brick / tile) in the topsoil; they are commonly assigned a modern origin. Only the most prominent of these are highlighted on the interpretation diagram.

7 DATA APPRAISAL & CONFIDENCE ASSESSMENT

7.1 Historic England Table 4 (EH 2008) states that the typical magnetic response on the local soils / geology is variable. The results from this survey indicate the presence of former field boundaries; consequently, the survey is deemed to have worked. However, weaker responses will have been masked by the magnetic disturbance.

8 CONCLUSION


8.1 The magnetometer survey has not recorded any magnetic responses that could be interpreted as being of definite archaeological interest. A few uncertain anomalies have been detected which are probably due to natural and/or agricultural processes and buried ferrous debris. Two former field boundaries and several land drains have also been marked. Zones of magnetic disturbance have been detected and are likely to have been caused by spreads of modern agricultural debris and/or landscaping.

9 REFERENCES

- BGS 2025 *Geology of Britain Viewer*, British Geological Survey, website:
(<http://www.bgs.ac.uk/opengeoscience/home.html?Accordion1=1#maps>)
- ClfA 2020 *Standard and Guidance for Archaeological Geophysical Survey*. 2014 amended 2020. ClfA Guidance note. Chartered Institute for Archaeologists, Reading
https://www.archaeologists.net/sites/default/files/ClfAS%26GGeophysics_3.pdf
- CU 2025 *The Soils Guide*. www.landis.org.uk. Cranfield University, UK. website:
<http://mapapps2.bgs.ac.uk/ukso/home.html>
- EAC 2016 *EAC Guidelines for the Use of Geophysics in Archaeology*, European Archaeological Council, Guidelines 2.
- EH 2008 *Geophysical Survey in Archaeological Field Evaluation*. English Heritage, Swindon (now withdrawn, but used for evaluating suitability of soil types)
- ULAS 2025 *An Archaeological Desk Based Assessment for land east of Bosworth Water Park, Wellsborough Road, Market Bosworth CV13 6PD*. ULAS, Leicester

10 ARCHIVE

- 10.1 The minimally processed data, data images, XY traces and a copy of this report are stored in **SUMO GeoSurveys'** digital archive, on an internal RAID configured NAS drive in the Midlands Office. These data are also backed up to the Cloud for off-site storage.
- 10.2 The Grey Literature will be archived with OASIS and the relevant HER within a period of 12 months.


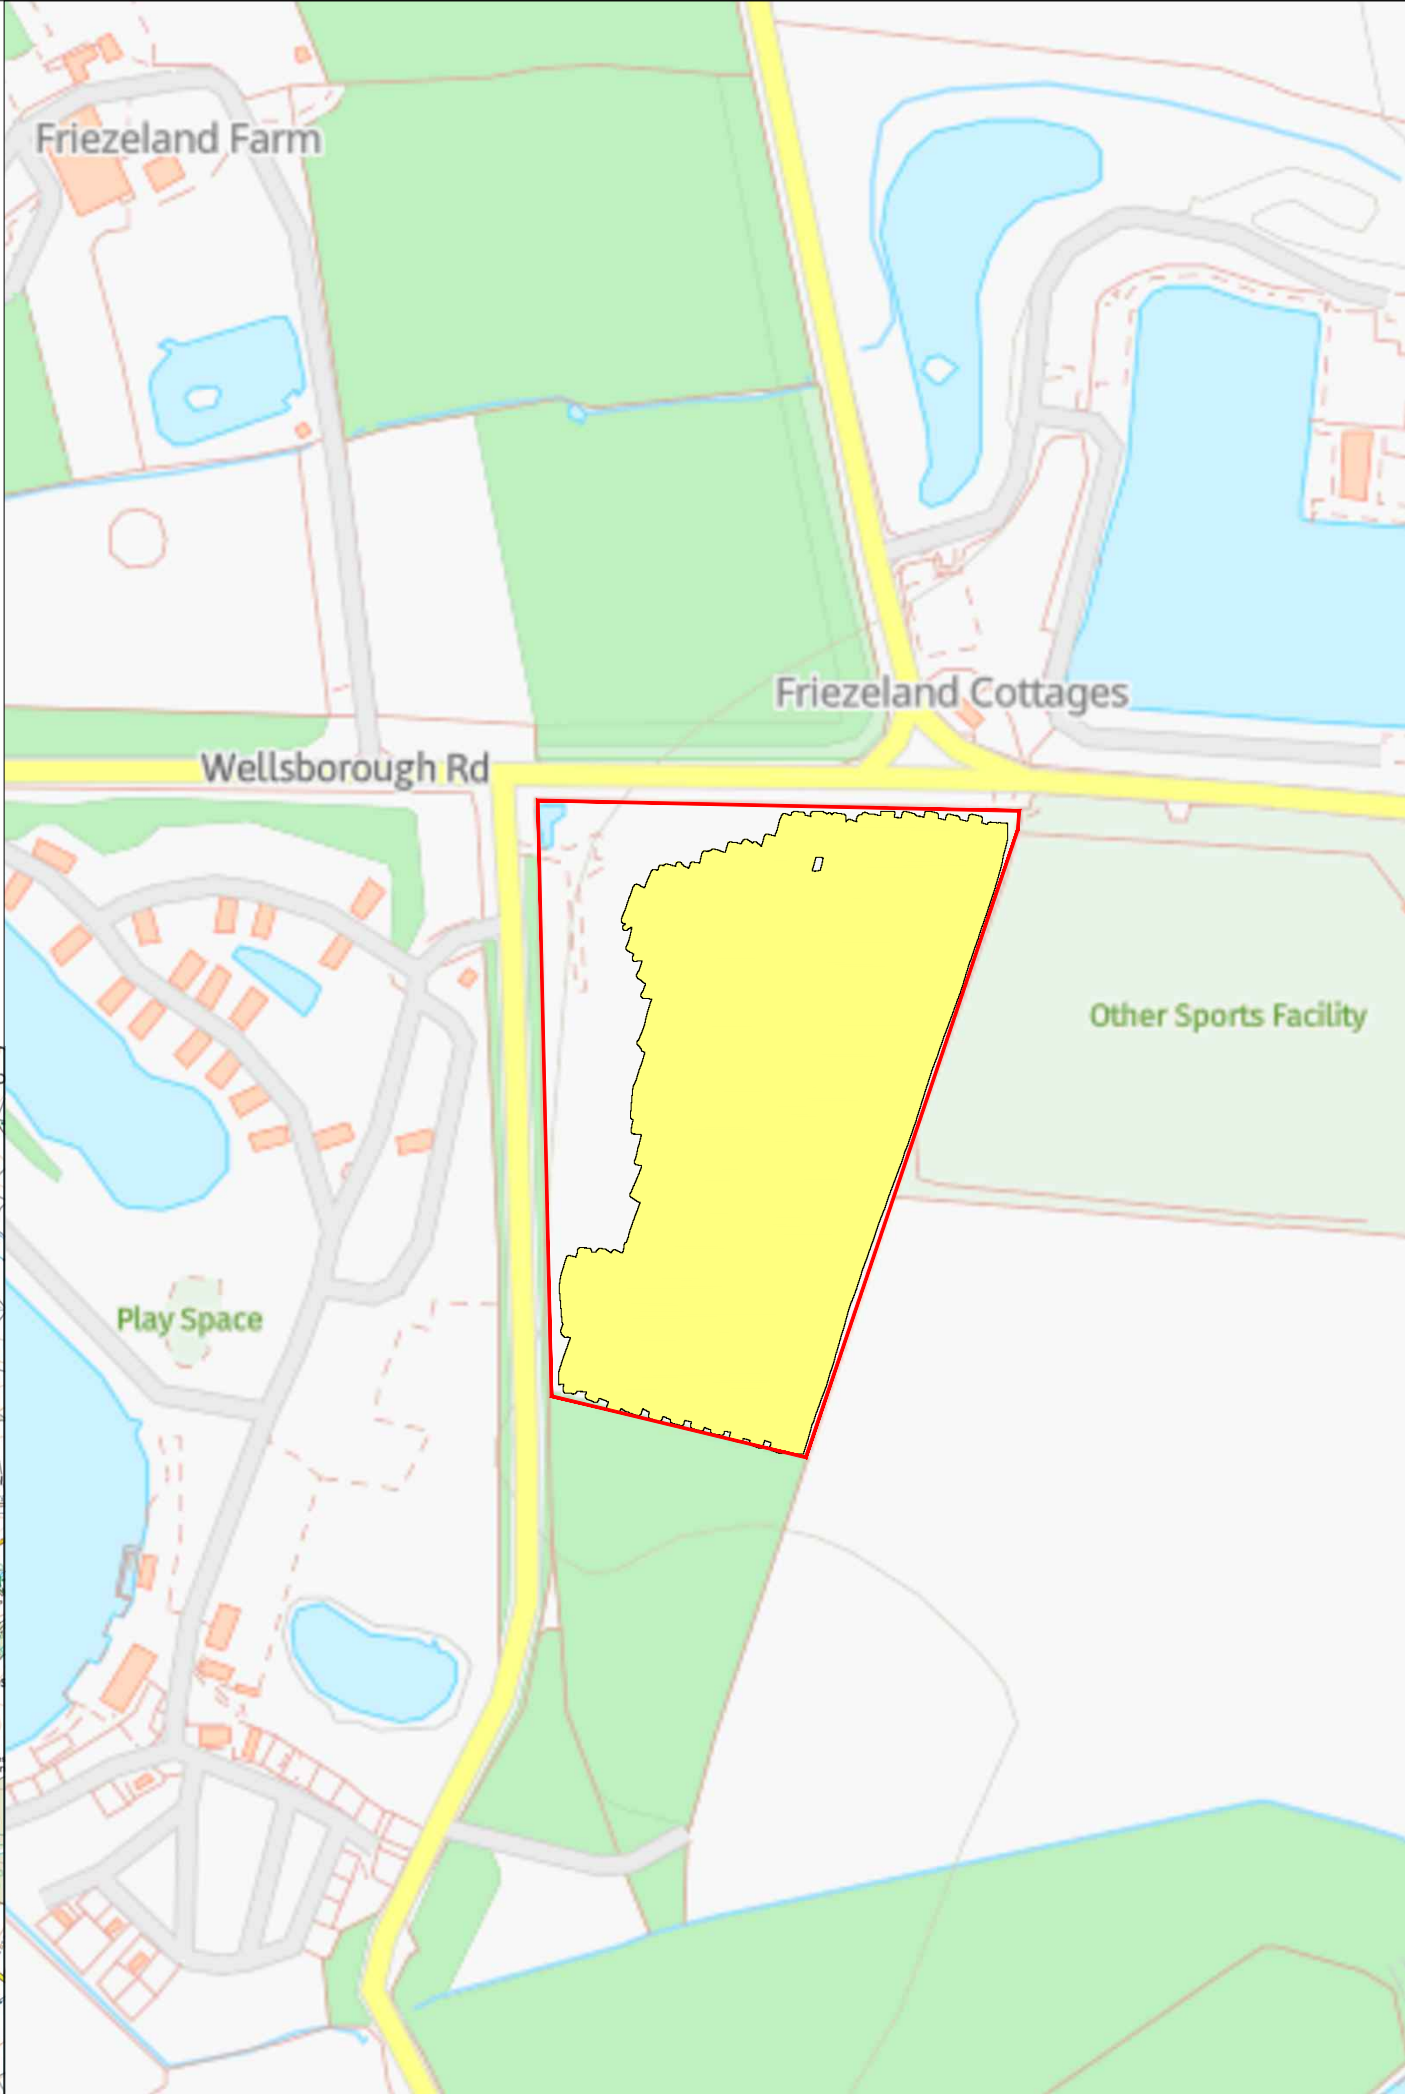


Reproduced from Ordnance Survey's 1:25 000 map of 1998 with the permission of the controller of Her Majesty's Stationery Office. Crown Copyright reserved.
Licence No: 100018665



	Survey Areas
---	--------------




Title: Site Location	
Client: ULAS	
Project: SUMO-24446: Land off Wellsborough Road, Market Bosworth	
Scale: NOT TO SCALE	Fig No: 01

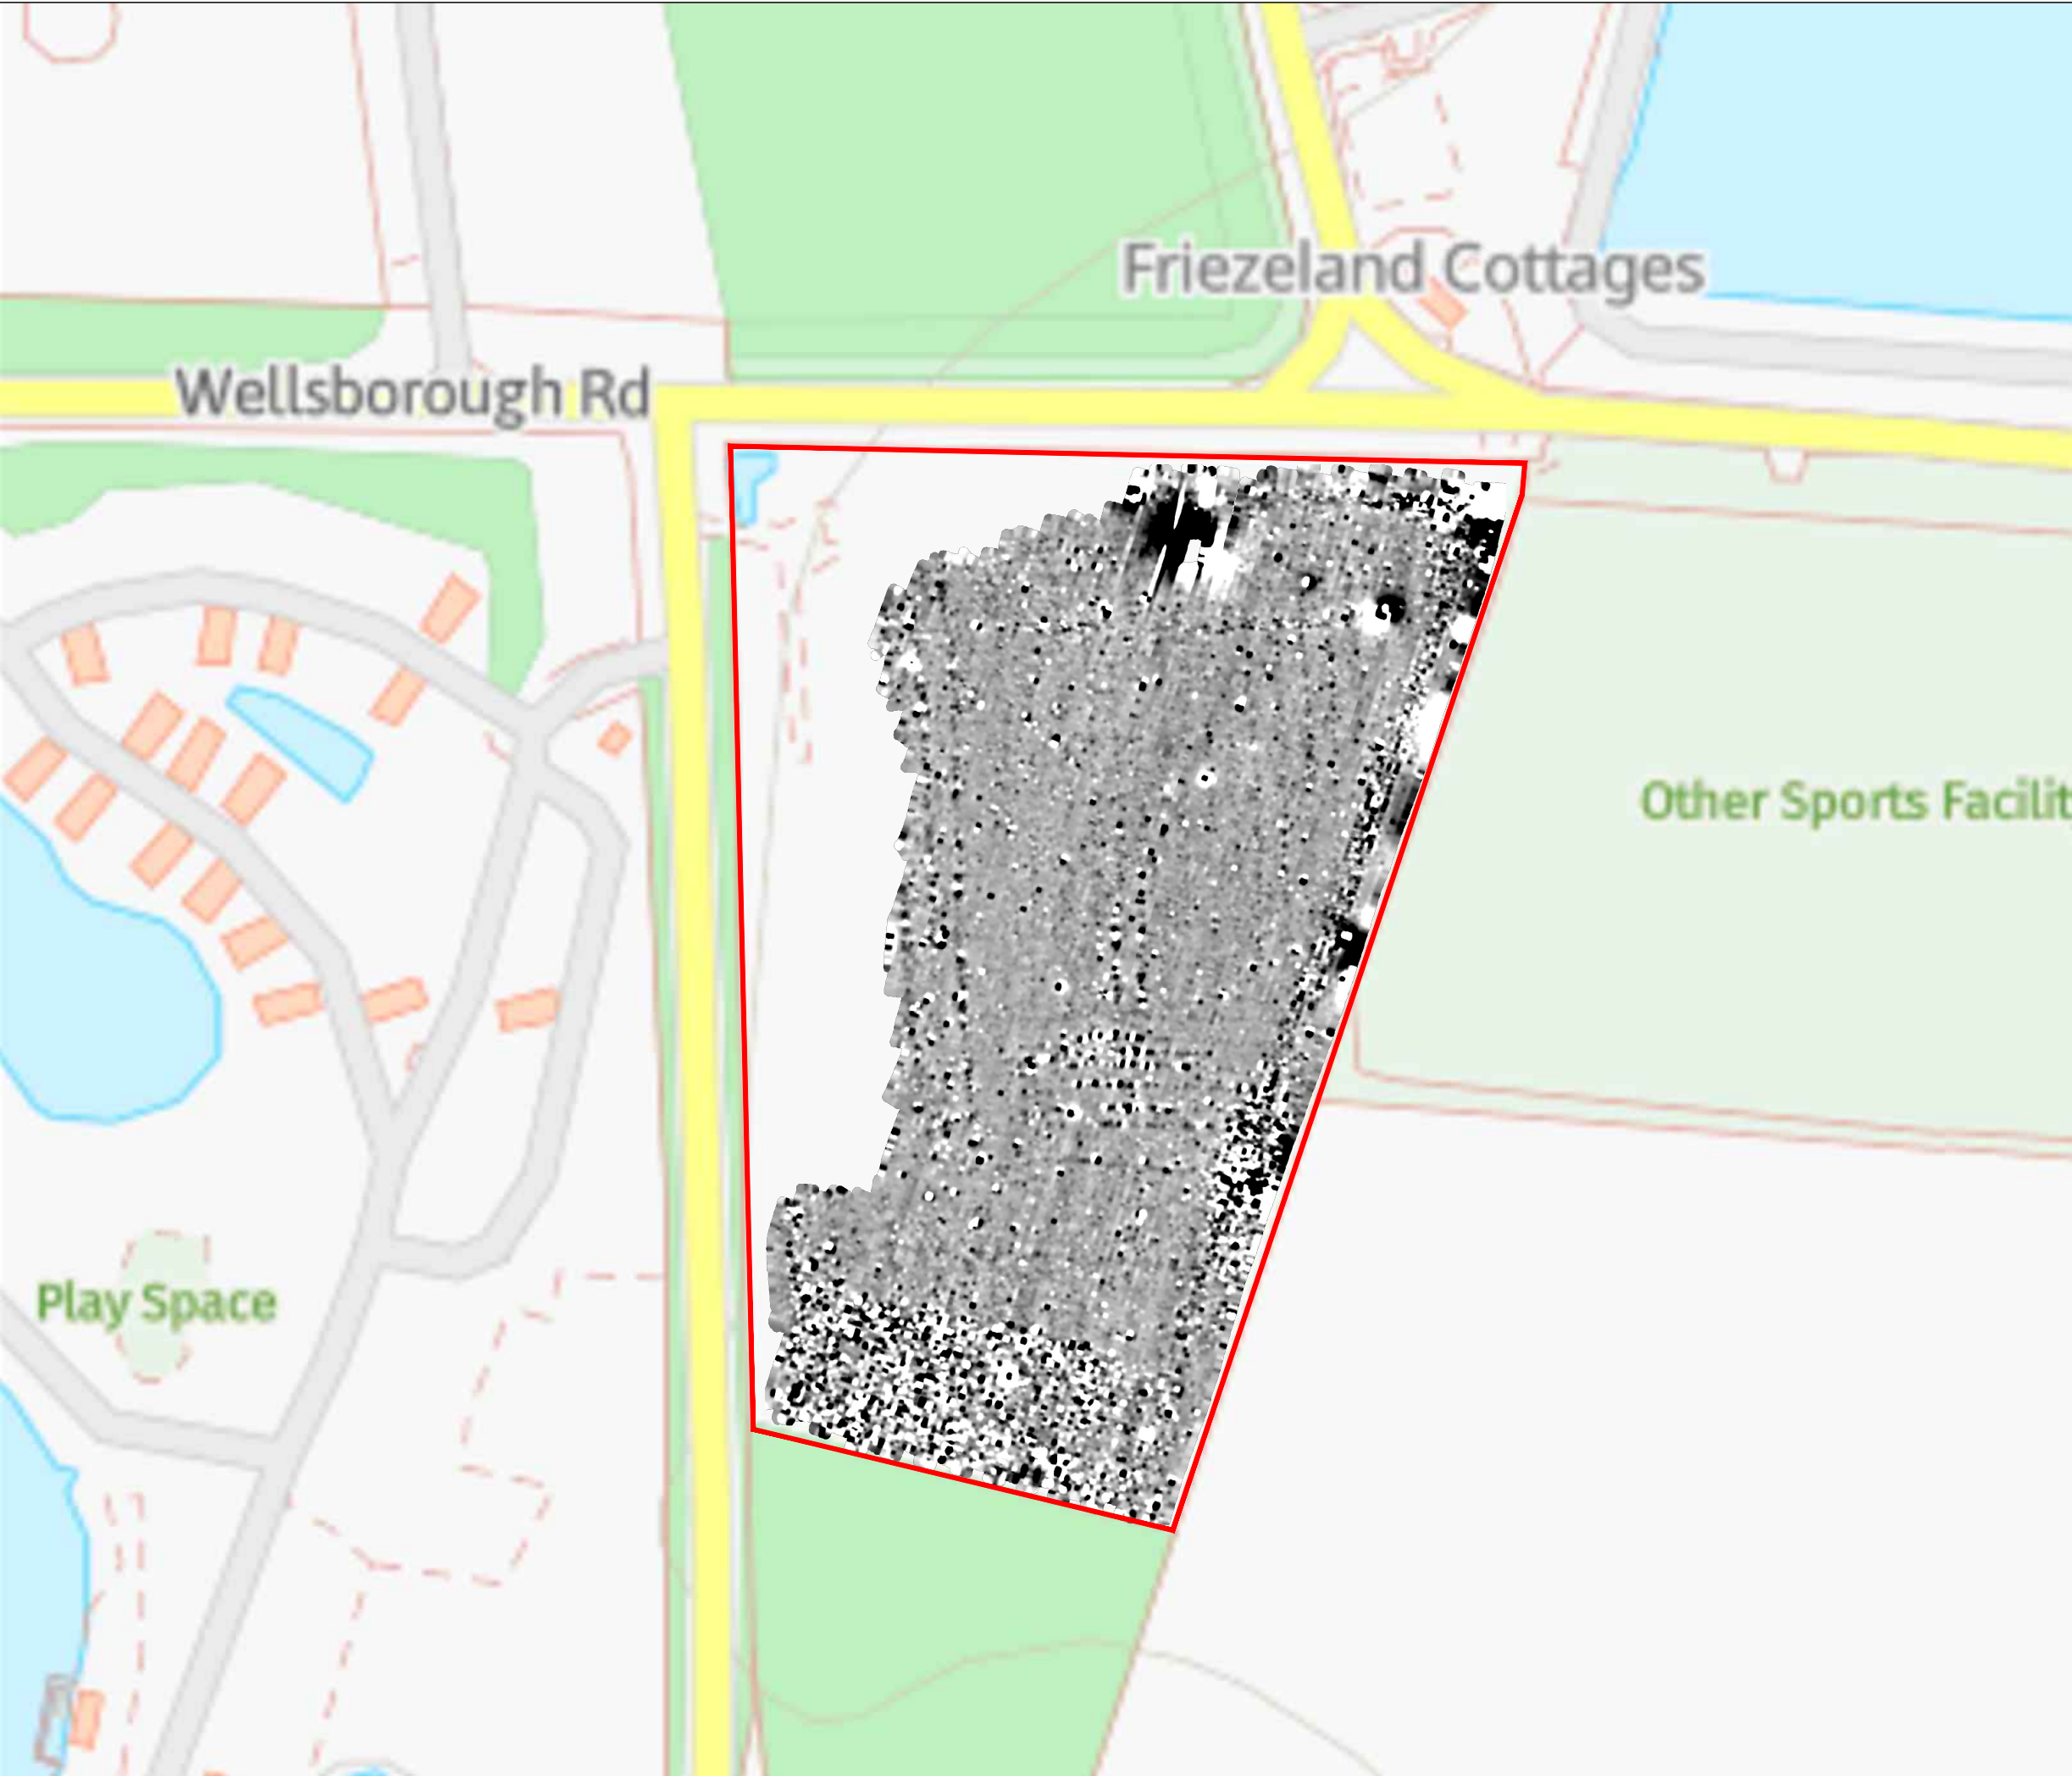

Title: Magnetometer Survey - Greyscale Plots	
Client: ULAS	
Project: SUMO-24446: Land off Wellsborough Road, Market Bosworth	
Scale: 0 75 metres 1:1500 @ A3	Fig No: 02

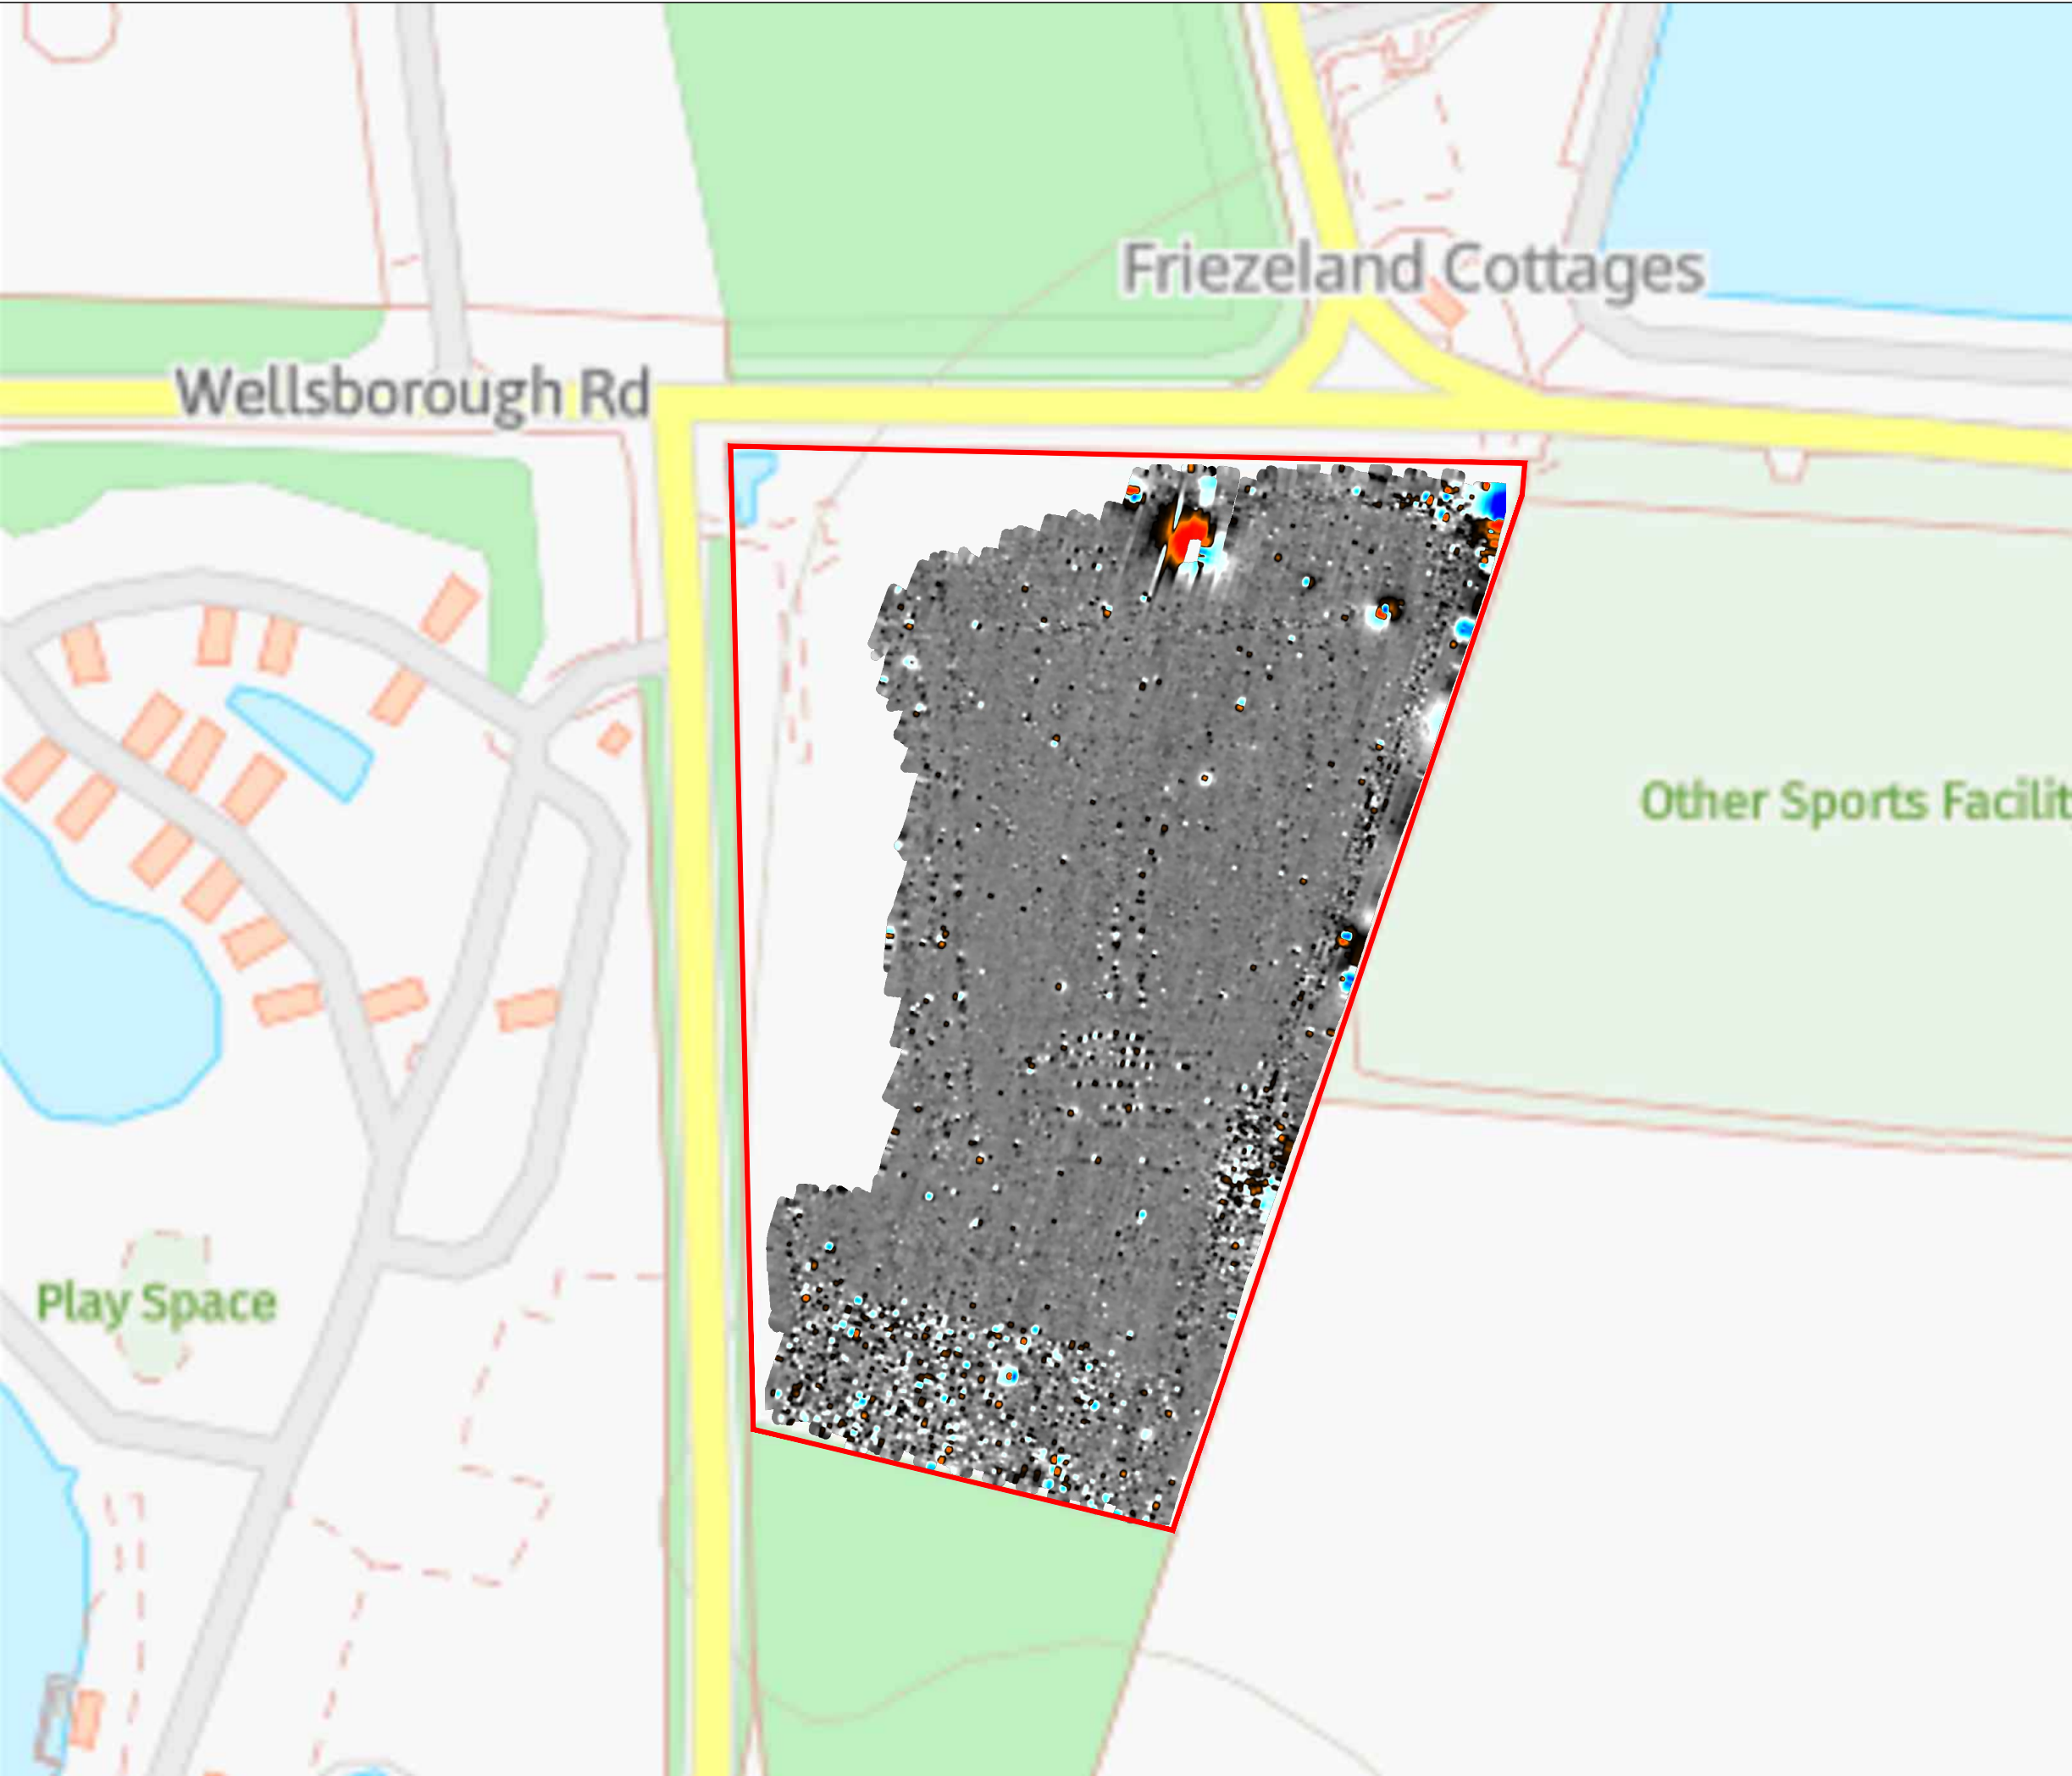

Title: Magnetometer Survey - Colour Plots	
Client: ULAS	
Project: SUMO-24446: Land off Wellsborough Road, Market Bosworth	
Scale: 0 75 metres 1:1500 @ A3	Fig No: 03



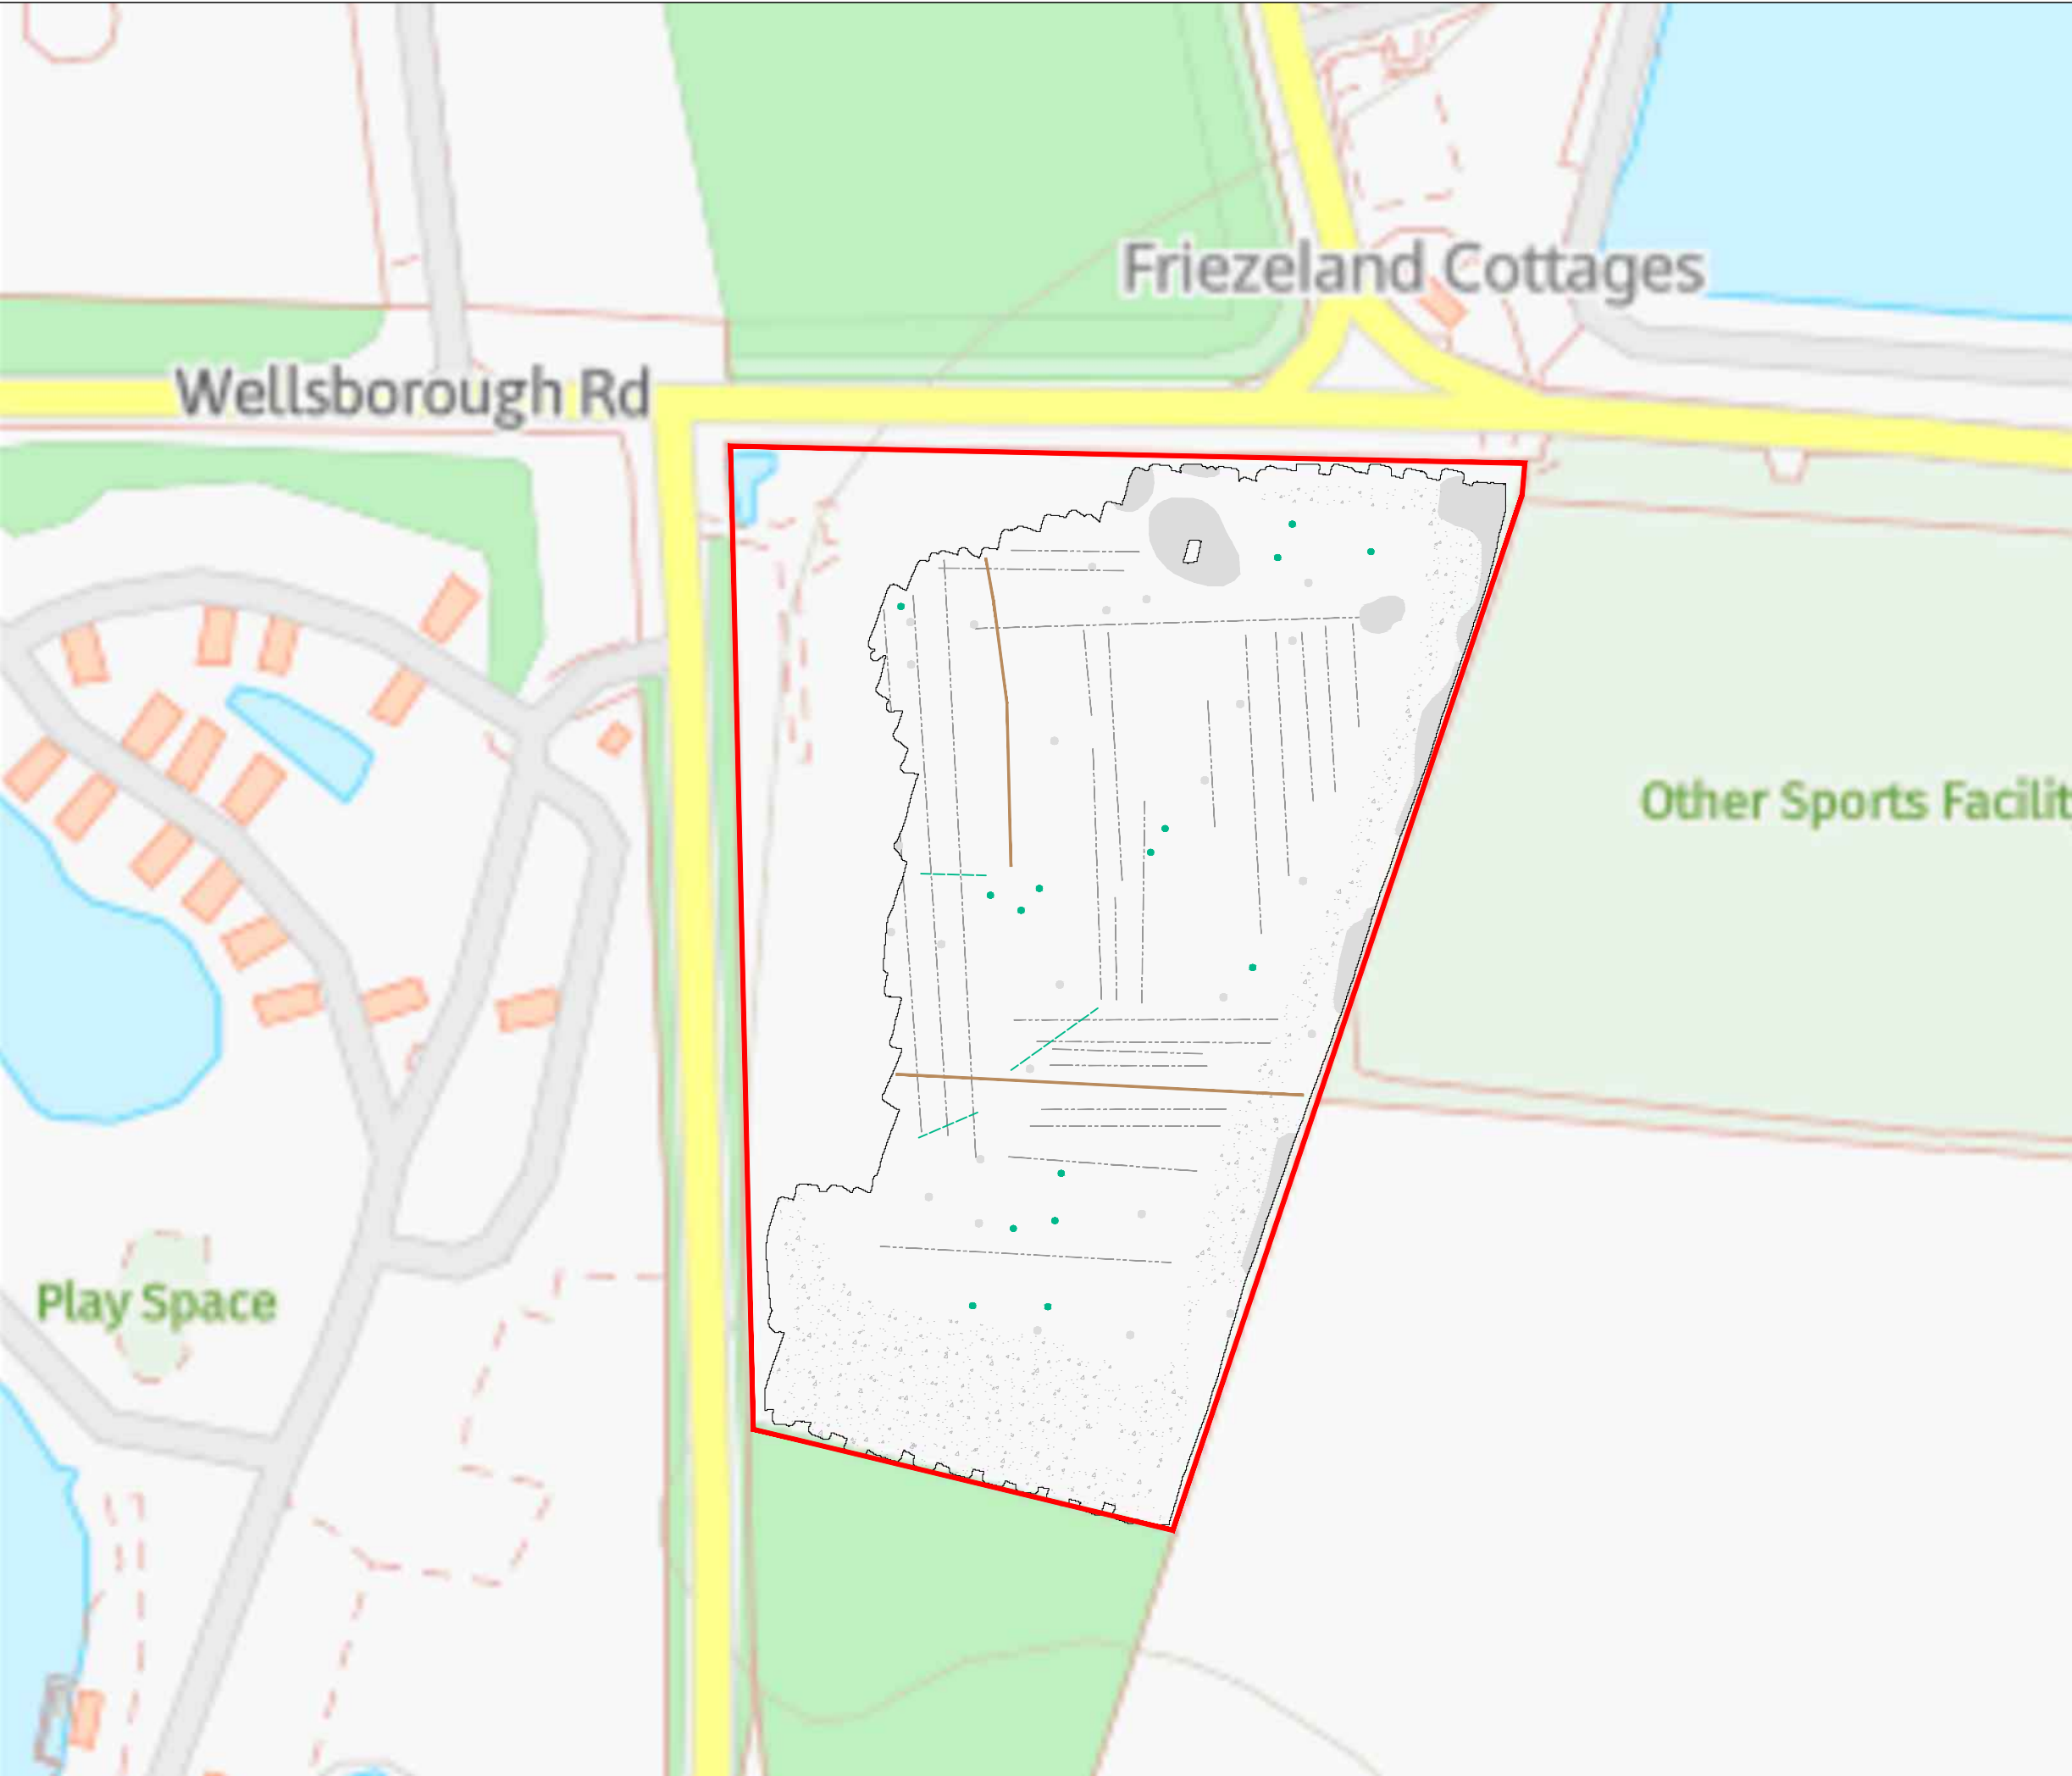


KEY

	Uncertain Origin (discrete anomaly / trend)
	Former field boundary (corroborated)
	Agriculture (land drain)
	Magnetic disturbance
	Ferrous



Title: Magnetometer Survey - Interpretation	
Client: ULAS	
Project: SUMO-24446: Land off Wellsborough Road, Market Bosworth	
Scale: 0 75 metres 1:1500 @ A3	Fig No: 04

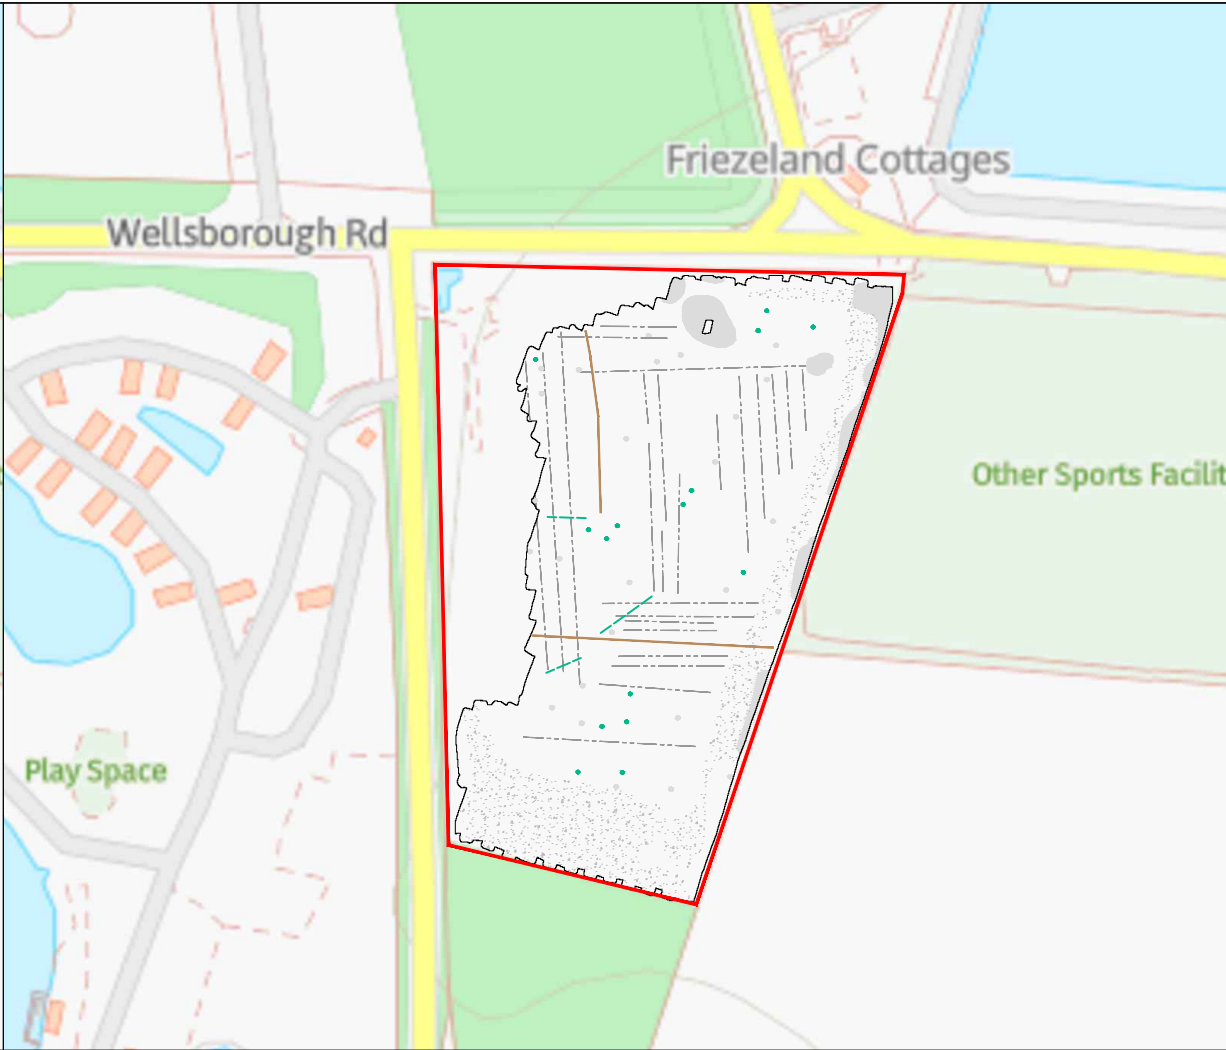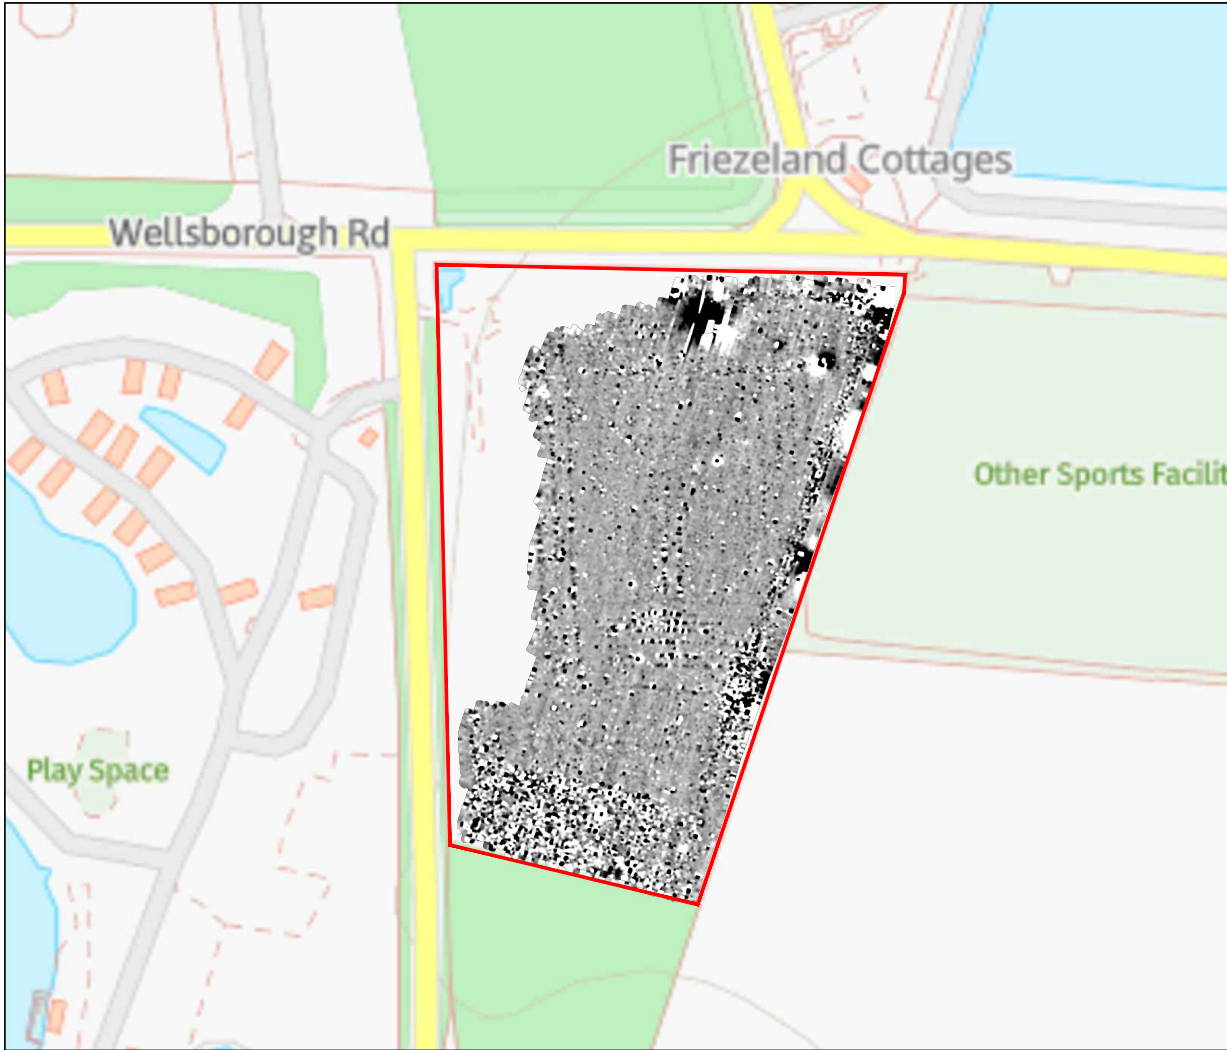

KEY

	Uncertain Origin (discrete anomaly / trend)
	Former field boundary (corroborated)
	Agriculture (land drain)
	Magnetic disturbance
	Ferrous





Title: Greyscale Plot / Interpretation /
Market Bosworth tithe map of 1848 (ULAS 2025)
/ 2022 Aerial Image

Client:
ULAS

Project:
SUMO-24446: Land off Wellsborough Road,
Market Bosworth

Scale: NOT TO SCALE	Fig No: 05
------------------------	---------------



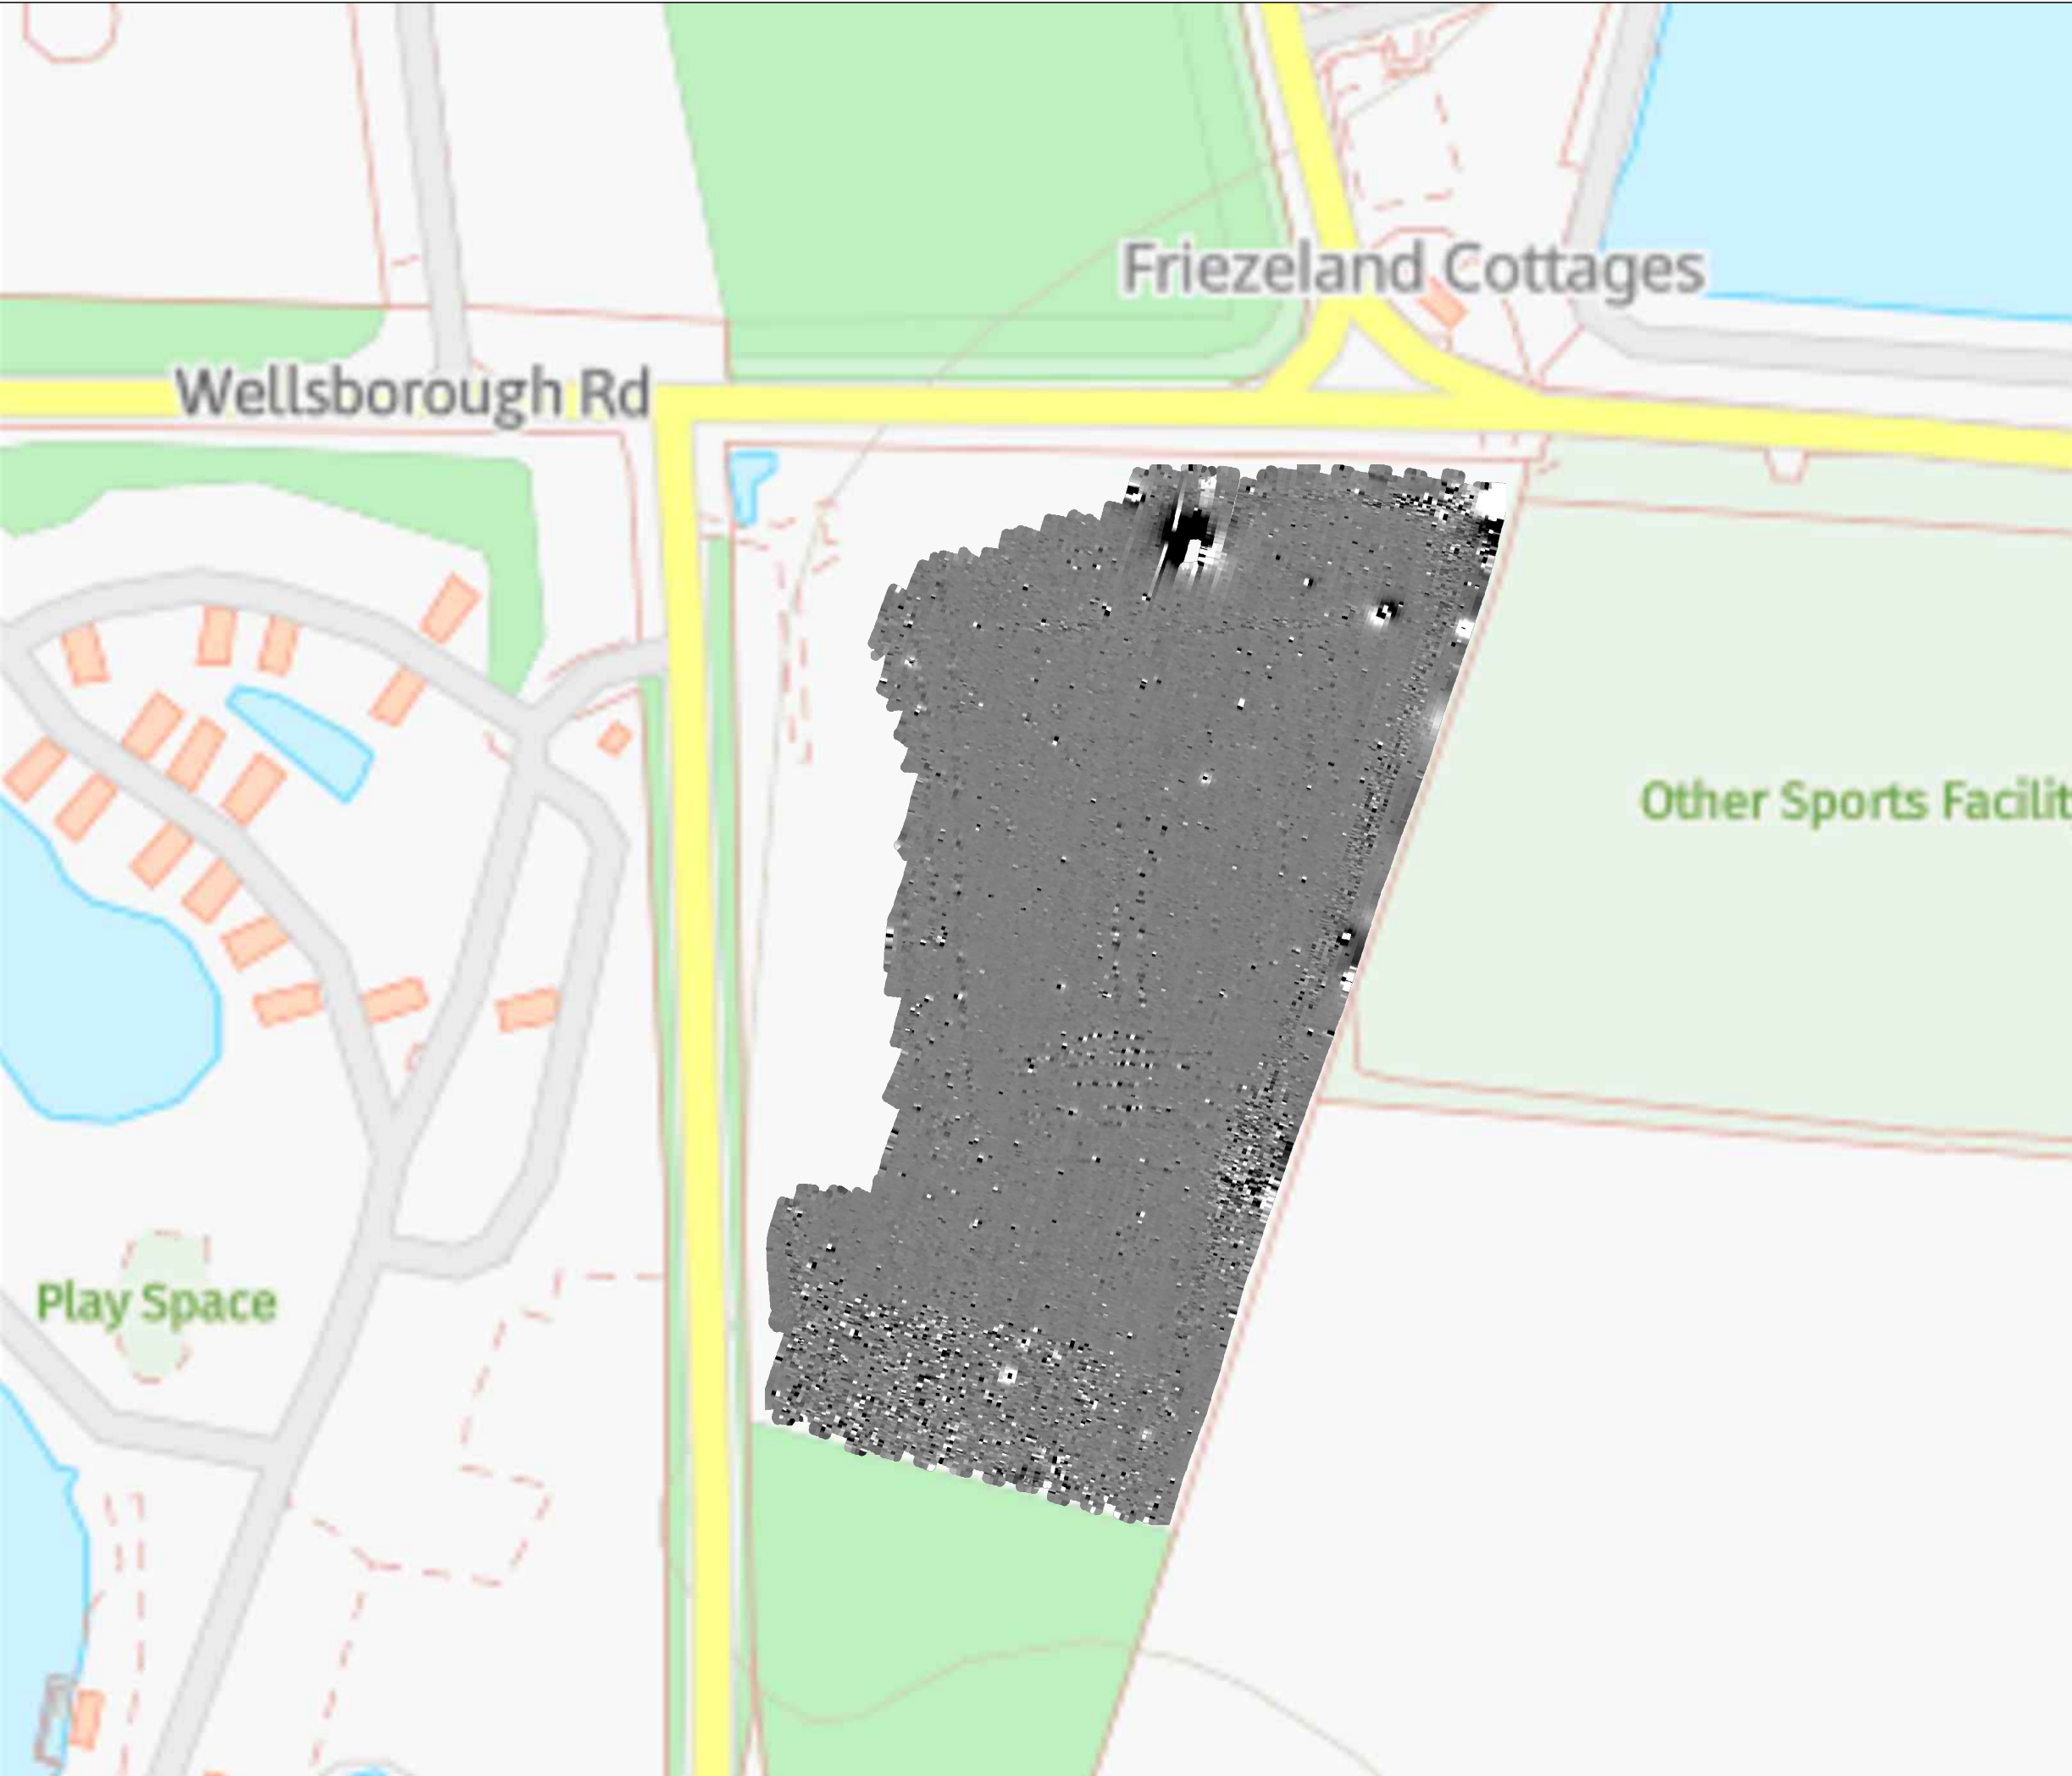

Title:
Minimally Processed Data - Greyscale Plots

Client:
ULAS

Project:
SUMO-24446: Land off Wellsborough Road,
Market Bosworth

Scale:
0 metres 75
1:1500 @ A3

Fig No:
06



Title: XY Trace Plots (clipped at +/-15nT)	
Client: ULAS	
Project: SUMO-24446: Land off Wellsborough Road, Market Bosworth	
Scale: 0 75 metres 1:1500 @ A3	Fig No: 07

Appendix A - Technical Information: Magnetometer Survey Method

Grid Positioning

For hand held gradiometers the location of the survey grids has been plotted together with the referencing information. Grids were set out using a Trimble R8 Real Time Kinematic (RTK) VRS Now GNSS GPS system.

An RTK GPS (Real-time Kinematic Global Positioning System) can locate a point on the ground to a far greater accuracy than a standard GPS unit. A standard GPS suffers from errors created by satellite orbit errors, clock errors and atmospheric interference, resulting in an accuracy of 5m-10m. An RTK system uses a single base station receiver and a number of mobile units. The base station re-broadcasts the phase of the carrier it measured, and the mobile units compare their own phase measurements with those they received from the base station. This results in an accuracy of around 0.01m.

Technique	Instrument	Traverse Interval	Sample Interval
Magnetometer	Bartington Grad 601-2	1.0m	0.25m
Magnetometer	Bartington Cart System	1.0m	0.125m
Magnetometer	MACS Cart System (Foerster)	1.0m	0.125m

Instrumentation:

Bartington instruments operate in a gradiometer configuration which comprises fluxgate sensors mounted horizontally, set 1.0m apart. The fluxgate gradiometer suppresses any diurnal or regional effects. The instruments are carried, or cart mounted, with the bottom sensor approximately 0.1-0.3m from the ground surface. At each survey station, the difference in the magnetic field between the two fluxgates is measured in nanoTesla (nT). The sensitivity of the instrument can be adjusted; for most archaeological surveys the most sensitive range (0.1nT) is used. Generally, features up to 1m deep may be detected by this method, though strongly magnetic objects may be visible at greater depths.

Bartington Grad 601-2

Hand-Held: Data will be collected using a Bartington Grad 601-2. The instrument consists of two paired sensors and readings are logged at 0.25m centres along traverses 1.0m apart across 30m grids. The collection of data at 0.25m centres provides an appropriate methodology balancing cost and time with resolution as per Historic England guidelines

Bartington Cart System

Data will be collected using a cart carrying four paired Bartington magnetic sensors. Each data point is geographically referenced using an on-board Trimble RTK survey grade GPS system. Readings will be taken at 0.125m centres along traverses 1.0m apart.

MACS Cart System (Foerster)

A multi-sensor array cart system (MACS) utilising 4 Foerster 4.032 Ferex CON 650 gradiometers, spaced at 1m intervals, with a control unit and data logger was used for the magnetic survey. Each data point is geographically referenced using an on-board RTK GNSS system. Readings will be taken at 0.125m centres along traverses 1.0m apart.

Data Processing

Zero Mean	This process sets the background mean of each traverse within each grid to zero.
Traverse	The operation removes striping effects and edge discontinuities over the whole of the data set.
Step Correction (De-stagger)	When gradiometer data are collected in 'zig-zag' fashion, stepping errors can sometimes arise. These occur because of a slight difference in the speed of walking on the forward and reverse traverses. The result is a staggered effect in the data, which is particularly noticeable on linear anomalies. This process corrects these errors.

Display

Greyscale/
Colourscale Plot

This format divides a given range of readings into a set number of classes. Each class is represented by a specific shade of grey, the intensity increasing with value. All values above the given range are allocated the same shade (maximum intensity); similarly, all values below the given range are represented by the minimum intensity shade. Similar plots can be produced in colour, either using a wide range of colours or by selecting two or three colours to represent positive and negative values. The assigned range (plotting levels) can be adjusted to emphasise different anomalies in the data-set.

Interpretation Categories

In certain circumstances (usually when there is corroborative evidence from desk-based or excavation data) very specific interpretations can be assigned to magnetic anomalies (for example, *Roman Road, Wall, etc.*) and where appropriate, such interpretations will be applied. The list below outlines the generic categories commonly used in the interpretation of the results.

<i>Archaeology / Probable Archaeology</i>	This term is used when the form, nature and pattern of the responses are clearly or very probably archaeological and /or if corroborative evidence is available. These anomalies, whilst considered anthropogenic, could be of any age.
<i>Possible Archaeology</i>	These anomalies exhibit either weak signal strength and / or poor definition, or form incomplete archaeological patterns, thereby reducing the level of confidence in the interpretation. Although the archaeological interpretation is favoured, they may be the result of variable soil depth, plough damage or even aliasing as a result of data collection orientation.
<i>Industrial / Burnt-Fired</i>	Strong magnetic anomalies that, due to their shape and form or the context in which they are found, suggest the presence of kilns, ovens, corn dryers, metal-working areas or hearths. It should be noted that in many instances modern ferrous material can produce similar magnetic anomalies.
<i>Former Field Boundary (probable & possible)</i>	Anomalies that correspond to former boundaries indicated on historic mapping, or which are clearly a continuation of existing land divisions. Possible denotes less confidence where the anomaly may not be shown on historic mapping but nevertheless the anomaly displays all the characteristics of a field boundary.
<i>Ridge & Furrow</i>	Parallel linear anomalies whose broad spacing suggests ridge and furrow cultivation. In some cases, the response may be the result of more recent agricultural activity.
<i>Agriculture (ploughing)</i>	Parallel linear anomalies or trends with a narrower spacing, sometimes aligned with existing boundaries, indicating more recent cultivation regimes.
<i>Land Drain</i>	Weakly magnetic linear anomalies, quite often appearing in series forming parallel and herringbone patterns. Smaller drains may lead and empty into larger diameter pipes, which in turn usually lead to local streams and ponds. These are indicative of clay fired land drains.
<i>Natural</i>	These responses form clear patterns in geographical zones where natural variations are known to produce significant magnetic distortions.
<i>Magnetic Disturbance</i>	Broad zones of strong dipolar anomalies, commonly found in places where modern ferrous or fired materials (e.g. brick rubble) are present.
<i>Service</i>	Magnetically strong anomalies, usually forming linear features are indicative of ferrous pipes/cables. Sometimes other materials (e.g. pvc) or the fill of the trench can cause weaker magnetic responses which can be identified from their uniform linearity.
<i>Ferrous</i>	This type of response is associated with ferrous material and may result from small items in the topsoil, larger buried objects such as pipes, or above ground features such as fence lines or pylons. Ferrous responses are usually regarded as modern.

Individual burnt stones, fired bricks or igneous rocks can produce responses similar to ferrous material.

Uncertain Origin

Anomalies which stand out from the background magnetic variation, yet whose form and lack of patterning gives little clue as to their origin. Often the characteristics and distribution of the responses straddle the categories of *Possible Archaeology / Natural* or (in the case of linear responses) *Possible Archaeology / Agriculture*; occasionally they are simply of an unusual form.

Where appropriate some anomalies will be further classified according to their form (positive or negative) and relative strength and coherence (trend: weak and poorly defined).

Appendix B - Technical Information: Magnetic Theory

Detailed magnetic survey can be used to effectively define areas of past human activity by mapping spatial variation and contrast in the magnetic properties of soil, subsoil and bedrock. Although the changes in the magnetic field resulting from differing features in the soil are usually weak, changes as small as 0.1 nanoTeslas (nT) in an overall field strength of 48,000 (nT), can be accurately detected.

Weakly magnetic iron minerals are always present within the soil and areas of enhancement relate to increases in *magnetic susceptibility* and permanently magnetised *thermoremanent* material.

Magnetic susceptibility relates to the induced magnetism of a material when in the presence of a magnetic field. This magnetism can be considered as effectively permanent as it exists within the Earth's magnetic field. Magnetic susceptibility can become enhanced due to burning and complex biological or fermentation processes.

Thermoremanence is a permanent magnetism acquired by iron minerals that, after heating to a specific temperature known as the Curie Point, are effectively demagnetised followed by re-magnetisation by the Earth's magnetic field on cooling. Thermoremanent archaeological features can include hearths and kilns; material such as brick and tile may be magnetised through the same process.

Silting and deliberate infilling of ditches and pits with magnetically enhanced soil creates a relative contrast against the much lower levels of magnetism within the subsoil into which the feature is cut. Systematic mapping of magnetic anomalies will produce linear and discrete areas of enhancement allowing assessment and characterisation of subsurface features. Material such as subsoil and non-magnetic bedrock used to create former earthworks and walls may be mapped as areas of lower enhancement compared to surrounding soils.

Magnetic survey is carried out using a fluxgate gradiometer which is a passive instrument consisting of two sensors mounted vertically 1m apart. The instrument is carried about 30cm above the ground surface and the top sensor measures the Earth's magnetic field whilst the lower sensor measures the same field but is also more affected by any localised buried feature. The difference between the two sensors will relate to the strength of a magnetic field created by this feature, if no field is present the difference will be close to zero as the magnetic field measured by both sensors will be the same.

Factors affecting the magnetic survey may include soil type, local geology, previous human activity and disturbance from modern services.

Appendix C - OASIS Summary

OASIS ID (UID)	sumogeop1-536584
Project Name	Geophysical Survey, Magnetometry Survey at Land off Wellsborough Road, Market Bosworth
Sitename	Land off Wellsborough Road, Market Bosworth
Sitecode	SUMO-24446
Project Identifier(s)	SUMO-24446 Land off Wellsborough Road, Market Bosworth
Activity type	Geophysical Survey, Magnetometry Survey, MAGNETOMETRY SURVEY
Planning Id	
Reason For Investigation	Planning requirement
Organisation Responsible for work	SUMO Geophysics Ltd.
Project Dates	08-Sep-2025 - 08-Sep-2025
Location	Land off Wellsborough Road, Market Bosworth NGR: SK 38848 03119 LL: 52.62444997791812, -1.427548784178889 12 Fig: 438848,303119
Administrative Areas	Country: England County/Local Authority: Leicestershire Local Authority District: Hinckley and Bosworth Parish: Market Bosworth
Project Methodology	Data was collected using a cart carrying four paired Bartington magnetic sensors. Four sensors mounted 1m horizontally apart and very accurately aligned to nullify the effects of the earth's magnetic field. Readings relate to the difference in localised magnetic anomalies compared with the general magnetic background. Each data point is geographically referenced using an on-board Trimble RTK survey grade GPS system. Readings were taken at 0.125m centres along traverses 1.0m apart. Readings relate to the difference in localised magnetic anomalies compared with the general magnetic background.
Project Results	The magnetometer survey has not recorded any magnetic responses that could be interpreted as being of definite archaeological interest. A few uncertain anomalies have been detected which are probably due to natural and/or agricultural processes and buried ferrous debris. Two former field boundaries and several land drains have also been marked. Zones of magnetic disturbance have been detected and are likely to have been caused by spreads of modern agricultural debris and/or landscaping.
Keywords	Field Boundary - POST MEDIEVAL - FISH Thesaurus of Monument Types

	Drainage System - 20TH CENTURY - FISH Thesaurus of Monument Types
Funder	Private or public corporation ULAS
HER	Leicestershire HER - unRev - STANDARD
Person Responsible for work	Thomas Cockcroft
HER Identifiers	
Archives	

Report generated on: 11-09-2025:1639

Appendix D – Data Management Plan & Archive Selection Strategy

Data Management Plan

Project ID / OASIS ID

SUMO-24446 / sumogeop1-536584

Project Name

Land off Wellsborough Road, Market Bosworth

Project Description

Detailed magnetic survey over approx. 3.5ha

Client

ULAS

Project Manager

Thomas Cockcroft

Field Leader

Gabriel Mazeski

Date DMP created

05/09/2025

Date DMP last updated

11/09/2025

Version

2

Technique - data

Detailed magnetic survey.

Manual – cart - other

Cart mounted magnetometers.

Documentation and metadata

All documentation and data produced are stored on SUMO servers in a specific job file.

Data storage, access and back-up

- SUMO Secure server during the project life set up in a RAID configuration (a RAID configuration incorporates a level of data redundancy meaning if a single hard drive in fails data can still be restored).

- Snap shots of the data will be made at several intervals during the day to allow data to be restored for up to 30 days if changed / deleted.
- Once the final report has been completed data will be moved onto NAS drive set up in a RAID configuration.
- All data is backed up to an off-site location (Cloud storage).

Archive Selection Strategy

Digital Data

Selection

It is proposed that only the final version of all born digital documents (reports, images and CAD files) will be selected for inclusion in the Preserved Archive. All raw and processed survey data will be included in the preserved archive. Below is what will constitute the selected archive:

- Raw data in XYZ format .csv and .png plus .pgw world file
- Processed data as .png plus .pgw world file
- Final survey report .pdf
- CAD and Vector graphics (interpretations) in .dwg format

De-selected digital data

The de-selected material will be retained on the SUMO Secure server and Cloud storage.

Documents

Not applicable – no archive

Materials

Not applicable – no archive



- Archaeological Geophysics
- Engineering Geophysics
- Measured Building Services
- Utility and Topographic Services
- Aerial Surveys
- Rail Surveys

SUMO GeoSurveys is a trading name of SUMO Geophysics Ltd.
SUMO Services Ltd, incorporated under the laws of England and Wales,
Company Registration No.4275993.
Registered Office Unit 8 Hayward Business Centre, New Lane, Havant, Hampshire, PO9 2NL