




SRK71ZTL-W / SRC71ZTL-W

7.1 (1.2~7.3)



Indoor Unit : SRK71ZTL-W



Outdoor Unit : SRC71ZTL-W


Specifications

R32

Indoor unit			SRK71ZTL-W
Outdoor unit			SRC71ZTL-W
Power source			1Phase, 220 - 240, 50Hz
Nominal cooling capacity (Min~Max)		kW	7.1 (1.2~7.3)
Nominal heating capacity (Min~Max)		kW	8.0 (1.1~9.1)
Power consumption	Cooling/Heating	kW	2.45 / 2.37
EER/COP	Cooling/Heating		2.90 / 3.38
Max. running current		A	17.0
Sound power level	Indoor	Cooling/Heating	61 / 61
	Outdoor	Cooling/Heating	66 / 66
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	48 / 44 / 39 / 31
	Indoor	Heating (Hi/Me/Lo/Ulo)	47 / 44 / 40 / 33
	Outdoor	Cooling/Heating	53 / 54
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	17.5 / 15.2 / 12.6 / 9.4
		Heating (Hi/Me/Lo/Ulo)	18.9 / 17.7 / 14.6 / 11.6
	Outdoor	Cooling/Heating	43.0 / 40.9
Exterior Dimensions	Indoor	Height x Width x Depth	294 x 998 x 230
	Outdoor	Height x Width x Depth	640 x 800(+71) x 290
Net weight	Indoor / Outdoor	kg	9.5 / 33.0
Refrigerant	Type/GWP		R32 / 675
Refrigerant	Charge	kg/TCO2Eq	0.9 / 0.61
Refrigerant piping size	Liquid/Gas	ø inch	6.35(1/4") / 12.7(1/2")
Refrigerant line (one way) length		m	Max.30
Vertical height differences	Outdoor is higher/lower	m	Max.20 / Max.20
Outdoor operating temperature range	Cooling	°C	-15~46
	Heating	°C	-20~24
Clean filter			Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1
Energy Class (Cooling/Heating)			A++/A++
SEER			7.10
SCOP (Average climate)			4.40
Pdesign (cooling/heating(@-10°C))		kW	7.10/6.20
Annual Electricity Consumption (cooling/heating)		kWh/a	351/1972
Designated Heating Season			Average

- * The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- * Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
- * 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
- *SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281




SRK63ZTL-W
SRK71ZTL-W

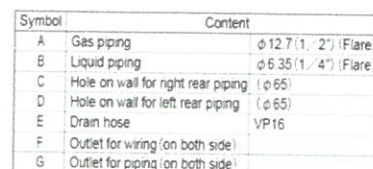[illegible]

Symbol	Content
A	Service valve connection (gas side) 20.25" #9 5/8" (Flare) #10 5/8" (71" @ 21.70" (Flare)
B	Service valve connection (liquid side) #6.35 (1/4") (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole #20x5places
E	Anchor bolt hole M12x12x40places

	AA	AB
ZSX	93	71.2
ZR	94.5	71
ZTL	94.5	71

Examples of installation Dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open



* The ZSX / ZR series does not have fin guard.