
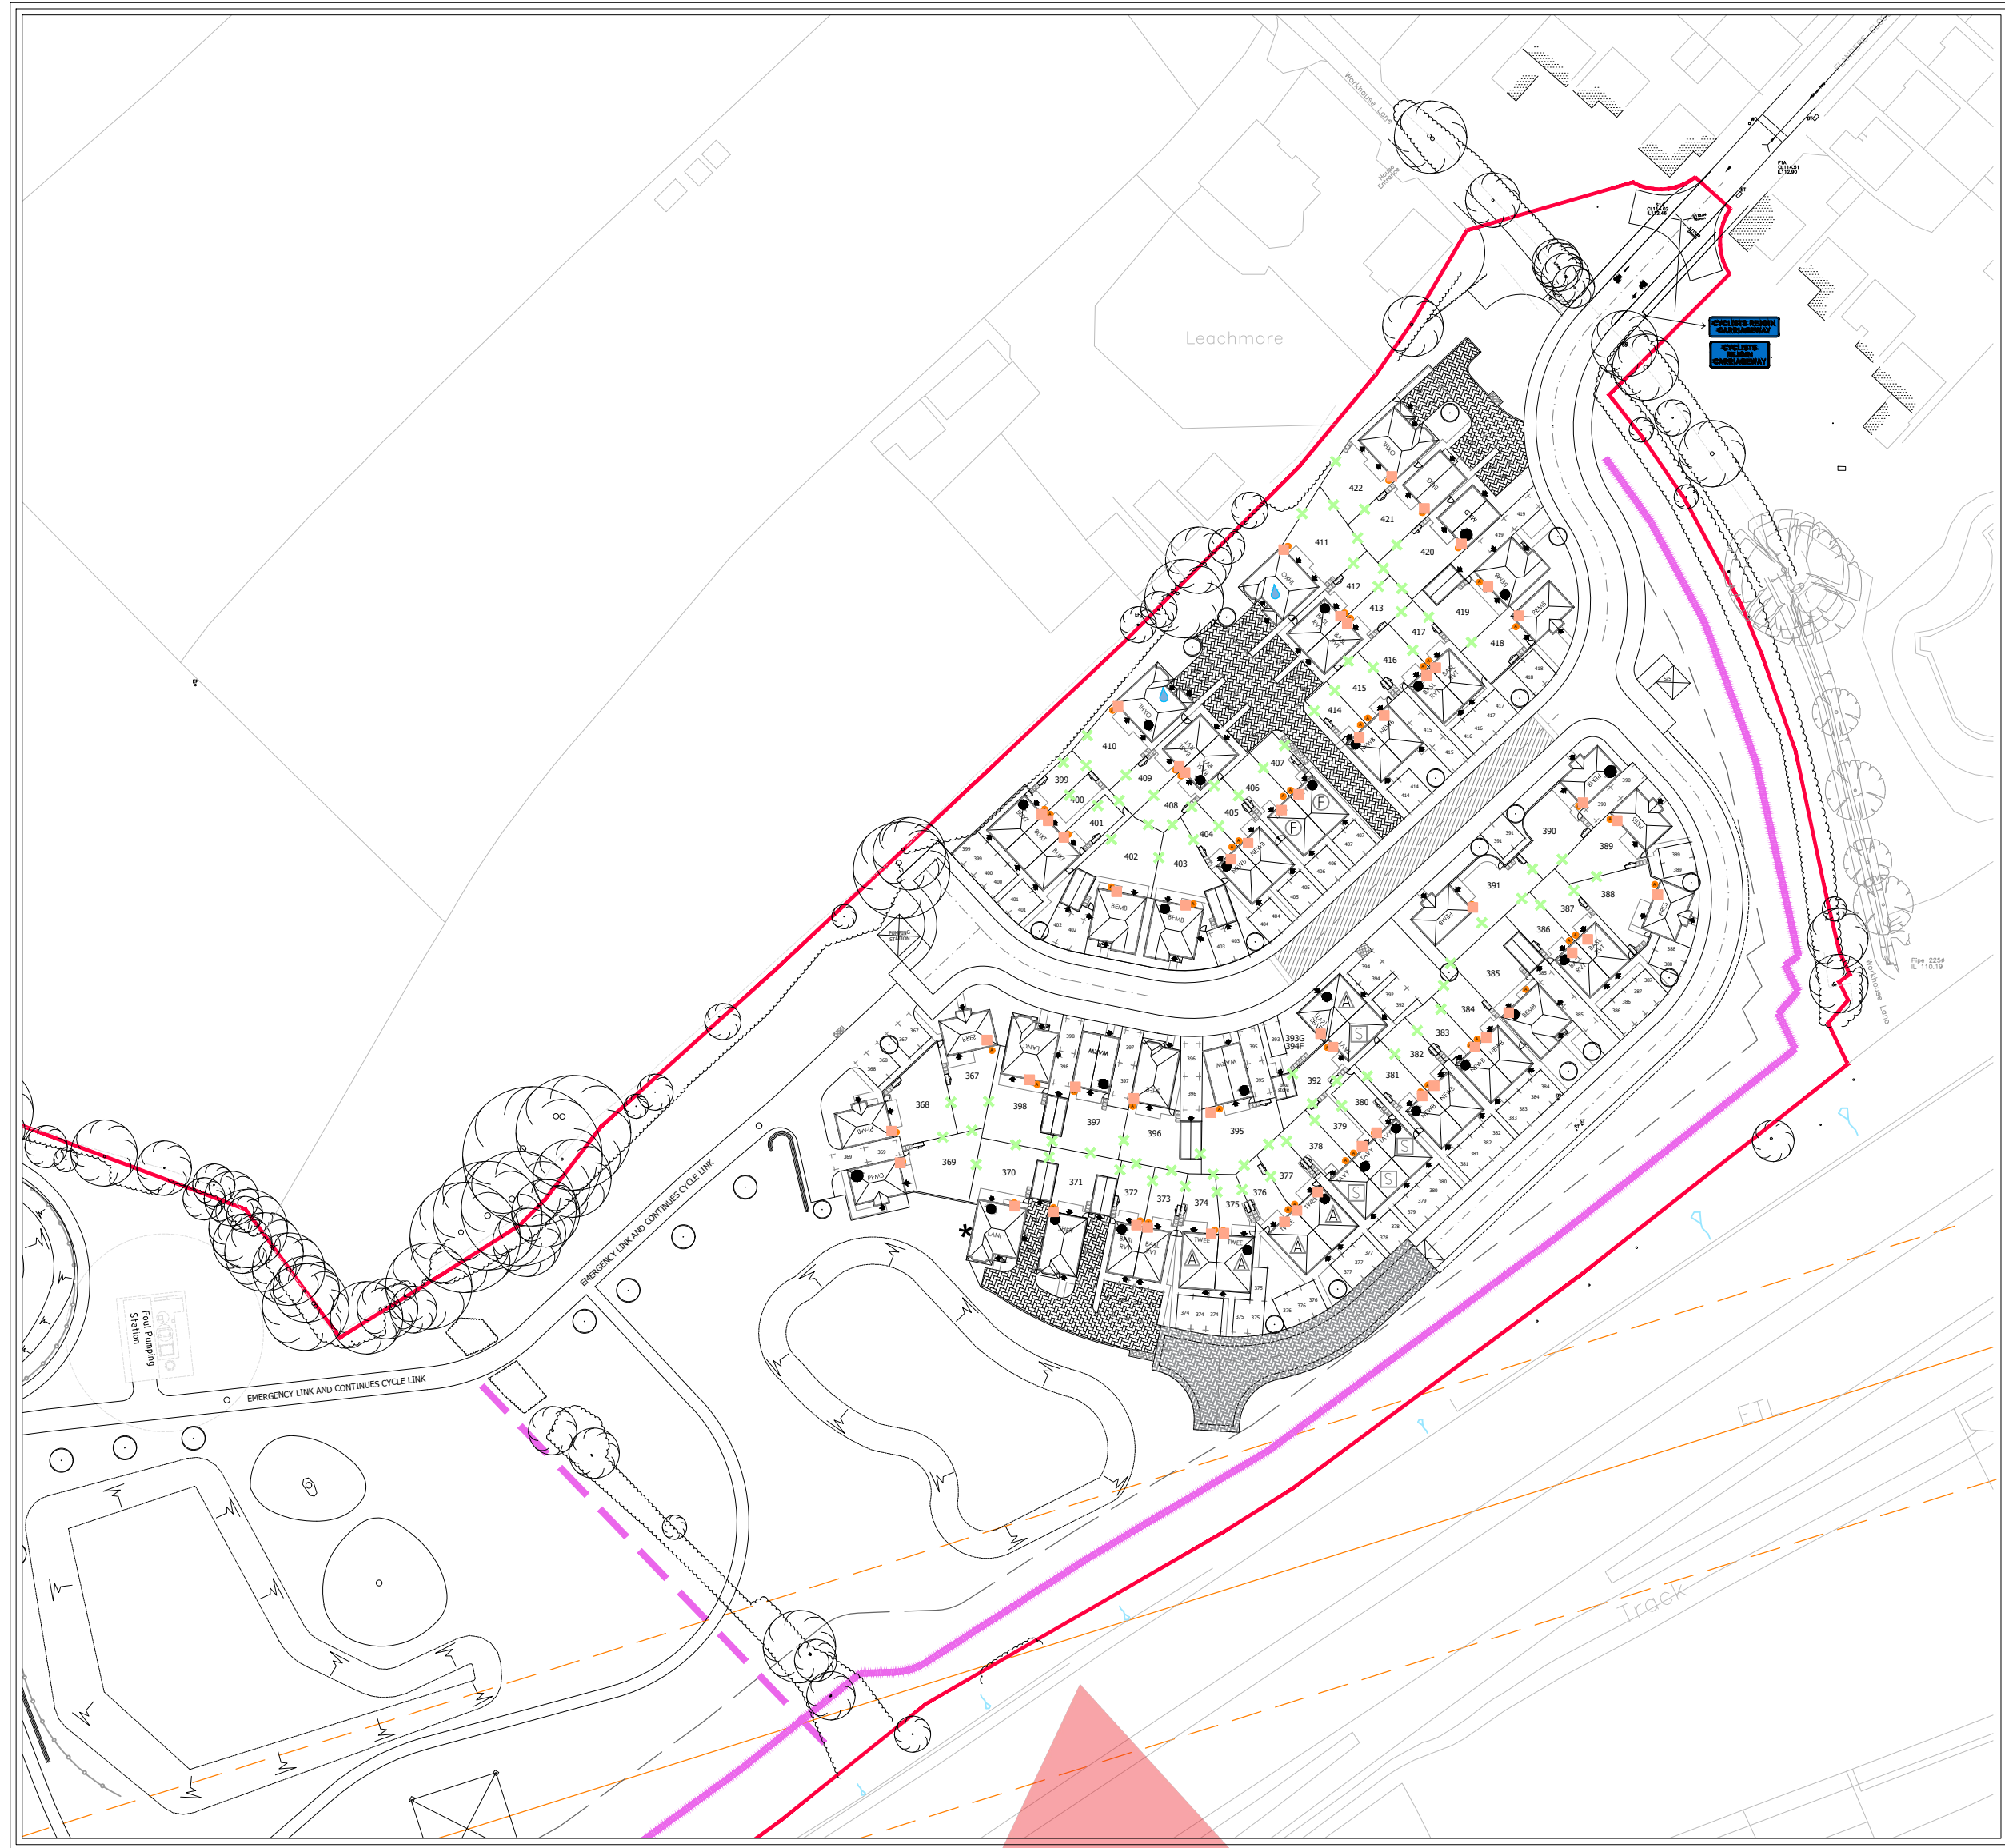


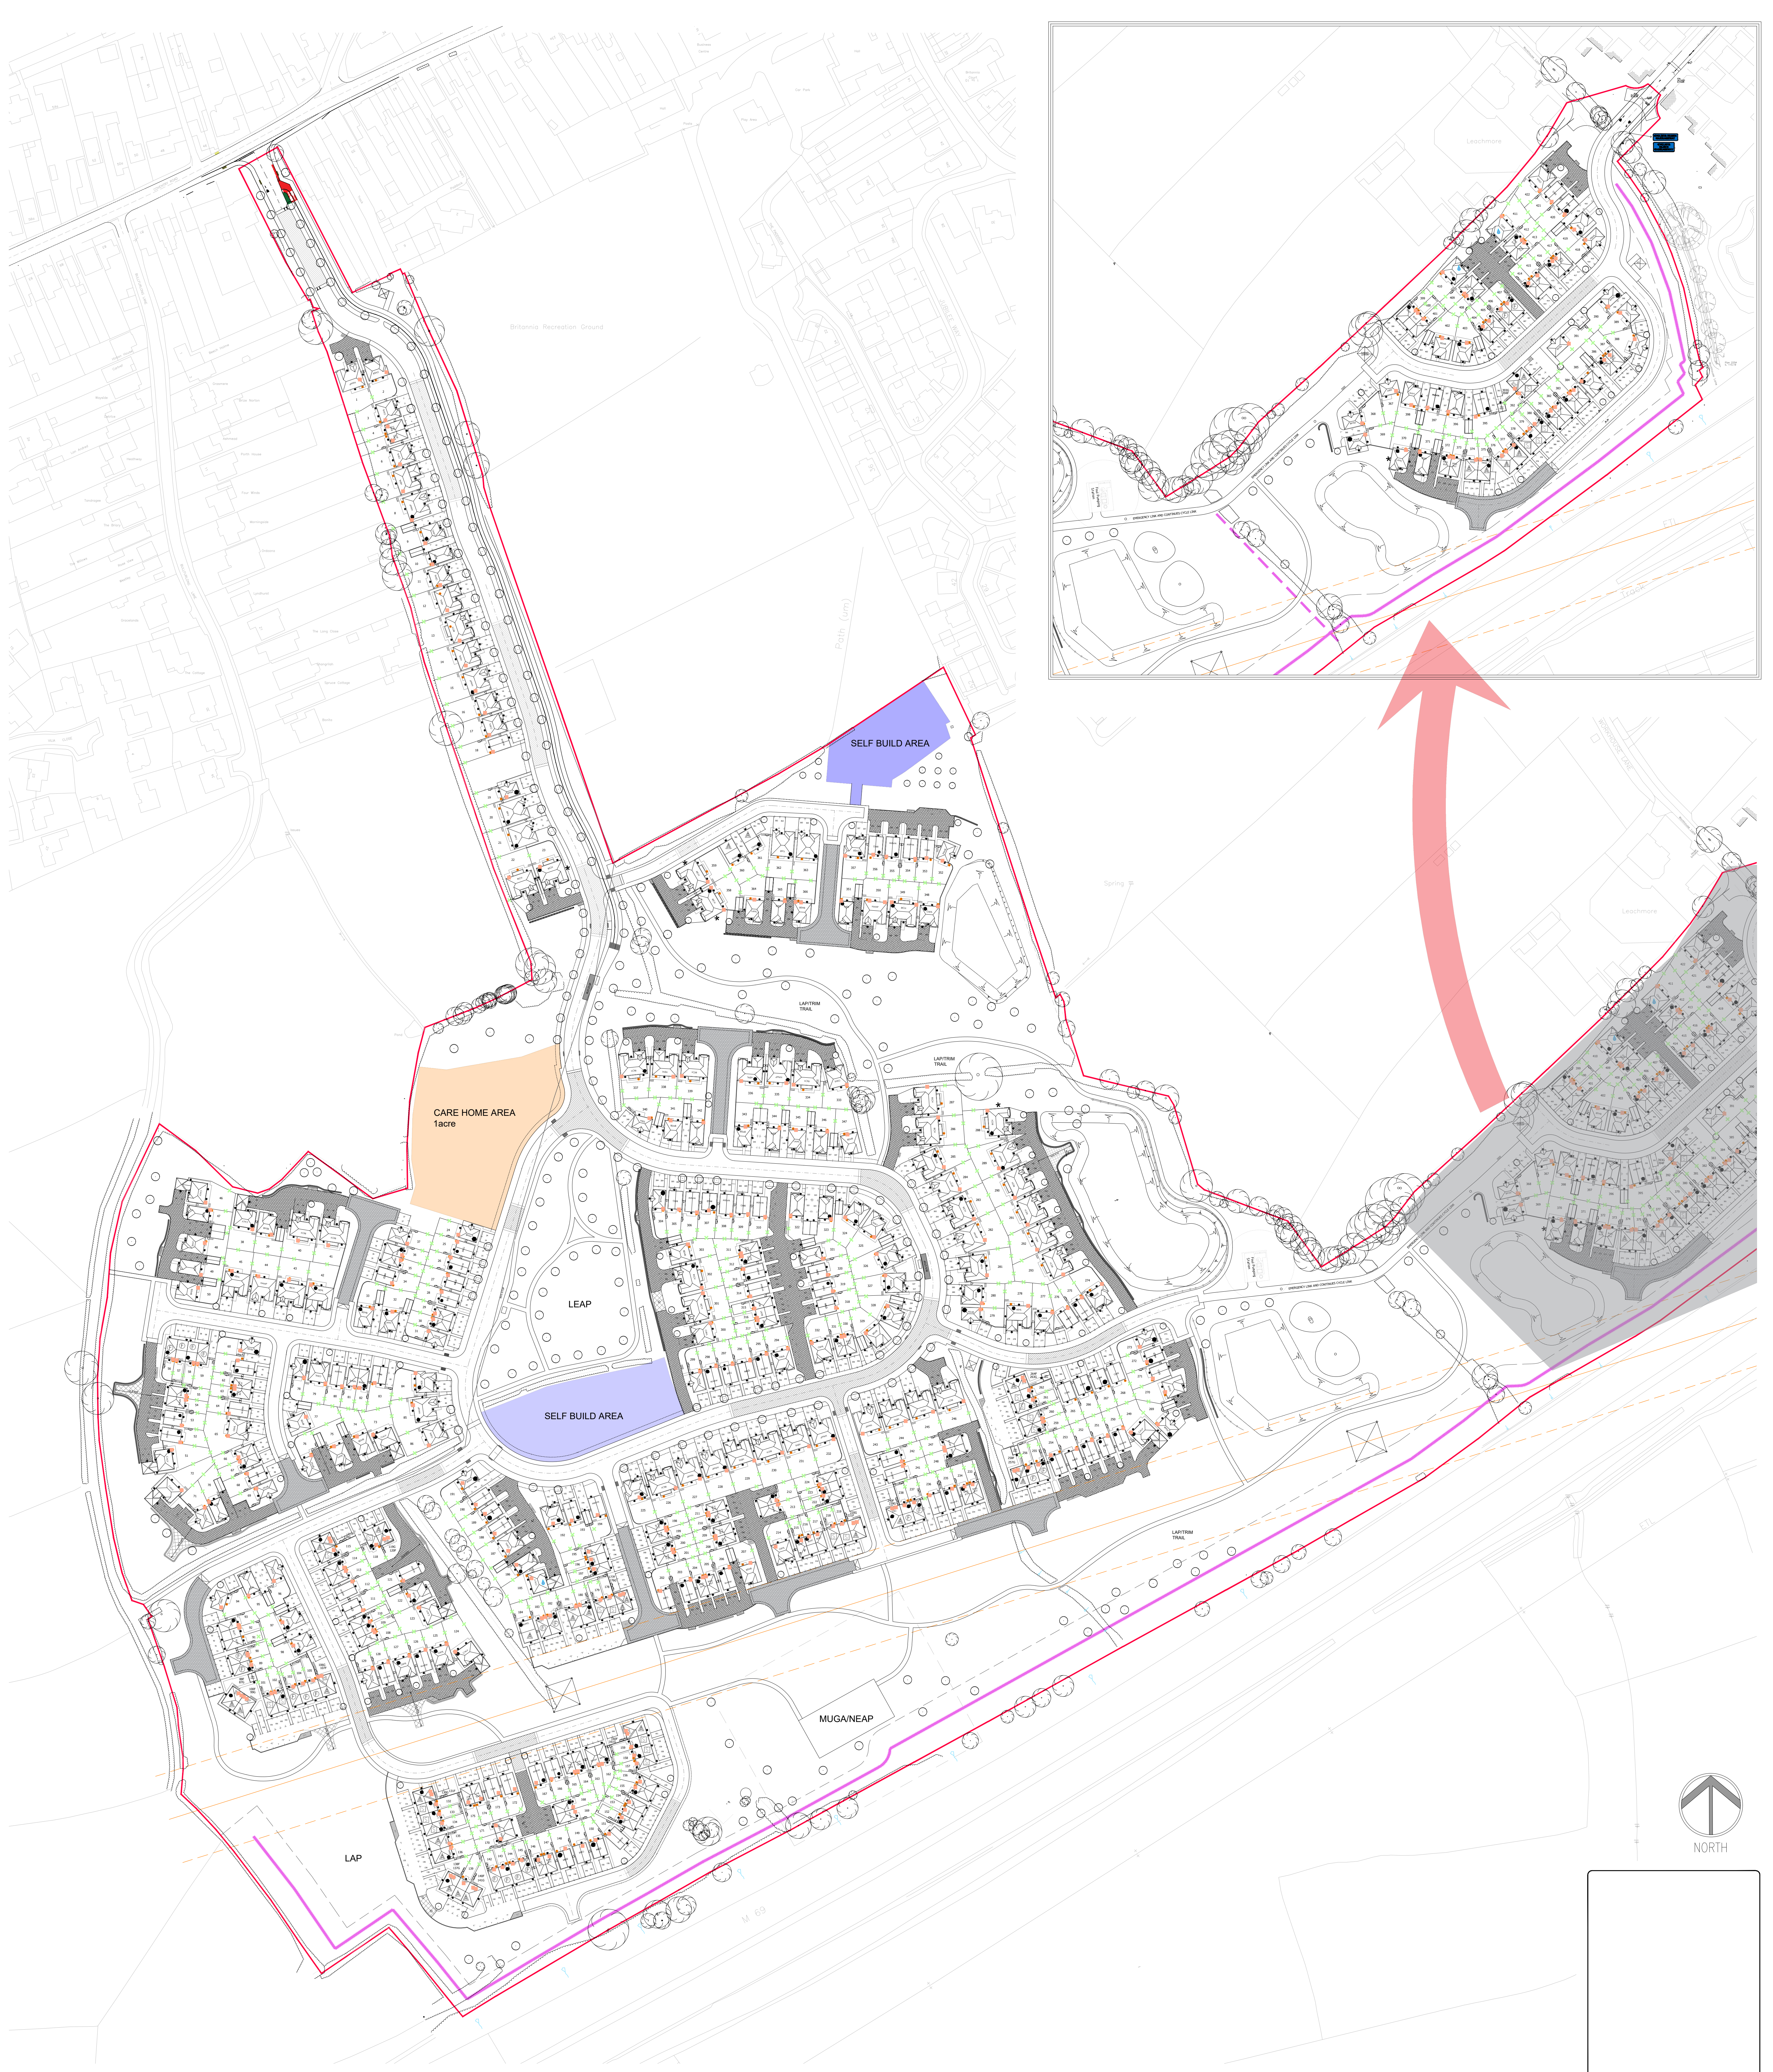

- KEY**
- Hedgehog Highway
 - Bat Box
 - Bird/Swift Boxes
- Requirements of Swift Bricks:**
- Cannot be placed above windows, doors, or ducts
 - The boxes should have shade for parts of the day
 - Nests must be above 4.5m in the air
 - The bricks can be placed under the eaves
 - However if they are not then, they need to be fitted with a cavity tray
 - Flight path needs to be unobstructed by other buildings
 - Multiple bricks can be put on one plot but they must be at least 1 meter apart
 - Detail on Integral Bird Box Details - Sheet 2 of 2 - Houses (reference EG-M2008)
 - Details for Bird Boxes found on EG-M2007, EG-M2008, and EG-M2009

A		14.08.25		Updated to suit site layout changes		DL
Revision	Date	Amendment				Initials
Drawing Status						PRELIMINARY PLANNING CONSTRUCTION
Development						LAND SOUTH OF BURBAGE
Location						BURBAGE
Marking Name						BAT BOXES, BIRD BRICKS, AND HEDGEHOG HIGHWAYS
Drawing Number						1693-08-02-100
Revision						A
Scale						1:1000
Drawn by						DL
Date Stamp						OCT 23
Checked by						
Date						
Redrow Homes Midlands						
Redrow House, Bristol Green, Walscott, Tamworth Buffershire B77 5PA						
Tel: 01827 260600 Fax: 01827 262454 Web: www.redrow.co.uk						
Legal Disclaimer Text: This layout has been designed after due consideration of our Context & Constraints Plan						

LAND SOUTH OF BURBAGE, BURBAGE - BATS BOXES , BIRD BRICKS, AND HEDGEHOG HIGHWAYS