
DISCONT

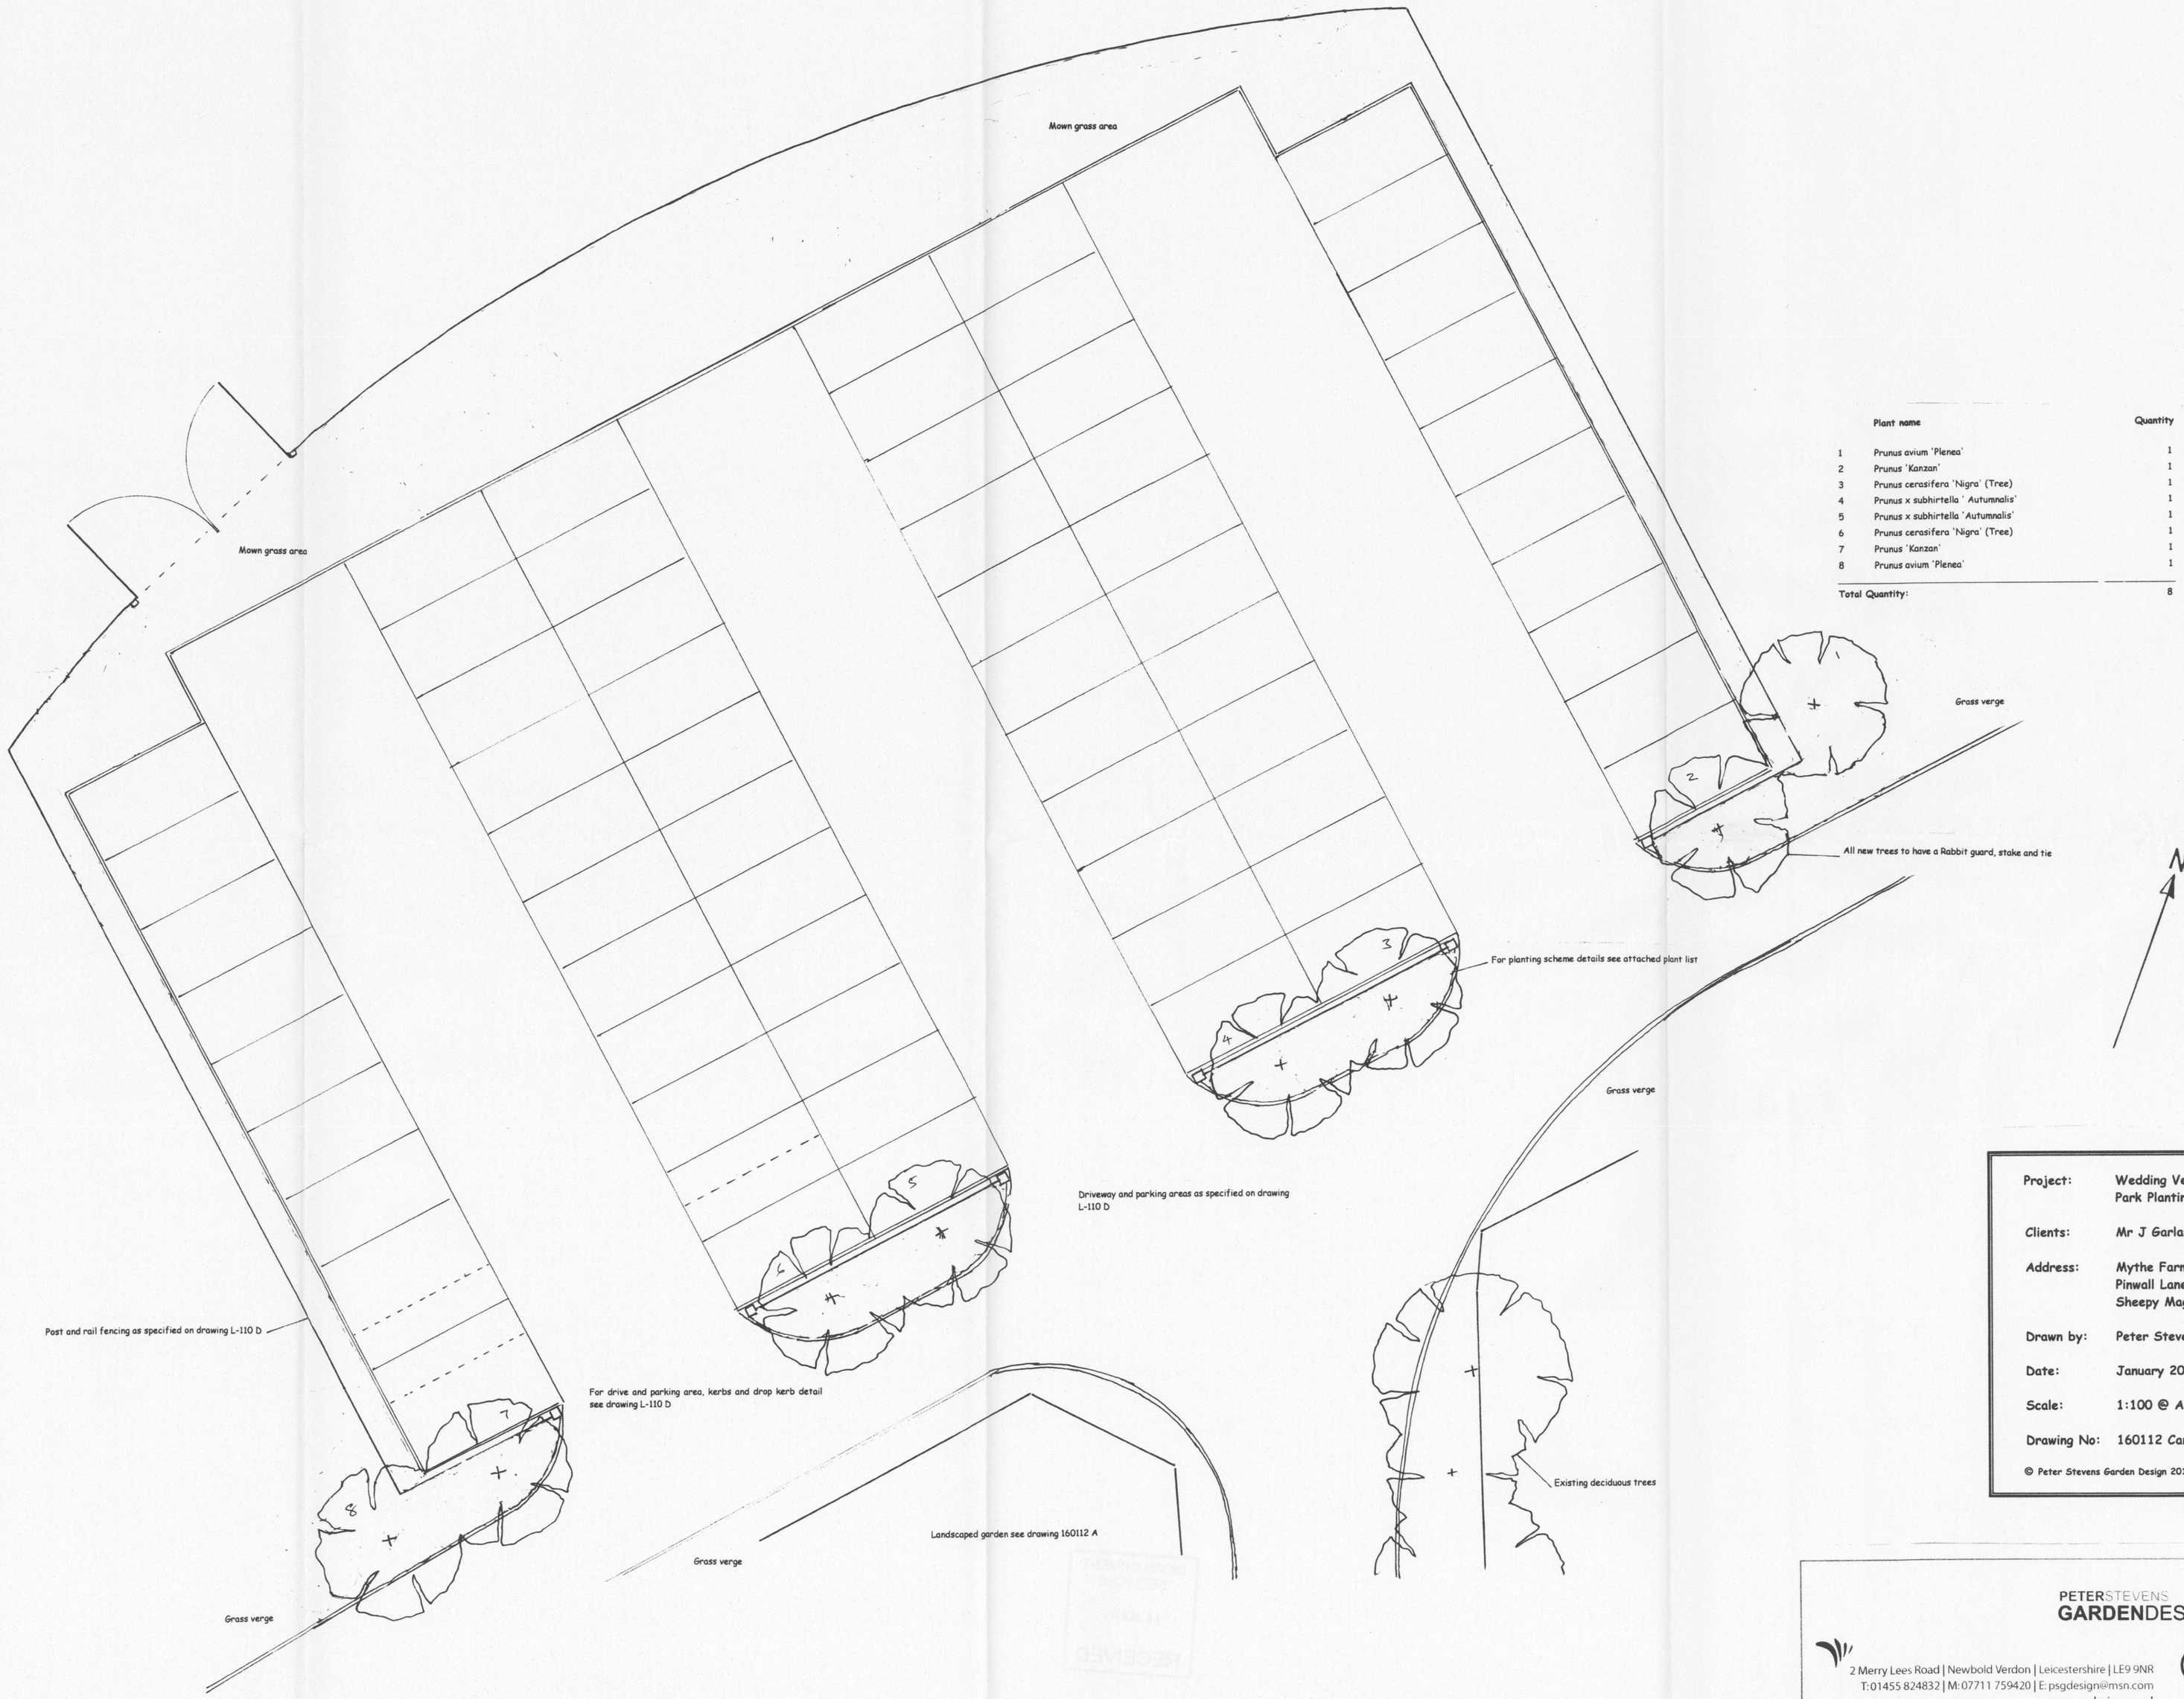

	Plant name	Quantity
1	Prunus avium 'Plenea'	1
2	Prunus 'Kanzan'	1
3	Prunus cerasifera 'Nigra' (Tree)	1
4	Prunus x subhirtella ' Autumnalis'	1
5	Prunus x subhirtella 'Autumnalis'	1
6	Prunus cerasifera 'Nigra' (Tree)	1
7	Prunus 'Kanzan'	1
8	Prunus avium 'Plenea'	1
Total Quantity:		8

Additional/general notes

The garden/site has been surveyed as accurately as possible using drawing no. L110 D. All dimensions are approximate and should be checked before construction
For details of the planting scheme see the accompanying catalogue or plant list.
No paving soil or any other material should be laid against the house/building above DPC usually two courses of blue or red engineering bricks would be left visible.
When natural stone paving is specified it should be laid with chamfered edge facing down leaving the largest face facing upwards. The finished surface the paving joints will be approximately 10-15mm.
The trees shrubs and plants are drawn at either their mature size or the size they should be kept pruned to once they have matured if you add additional plants the garden will quickly become overcrowded.
New plants and shrubs are usually supplied in 3-5 litre pots, should you require some larger specimens for some instant maturity or screening please feel free to discuss this with me or your landscaper.
All outdoor power supplies should be through armoured cable and RCD trip and installed by a qualified electrician. Lay conduit for lights and power before laying finished hard surfaces.
See additional drawings for lighting scheme.
During ground preparation ensure that there is an adequate depth (minimum of 300mm) of good quality screened top soil in all planting areas. To help retain moisture and reduce weed growth after planting mulch with good quality Bark Chippings. Use of poor quality mulch will detract from the appearance of the garden and it would be better not to have it at all. Although the garden is new weeds will still grow and regular tidying and maintenance will be required.
It is essential to water the garden frequently when newly planted if there has not been much steady rain and during warm/hot dry spells, as this will reduce the potential for losses however do not over water. We recommend feeding the garden and lawn at least twice a year spring and mid-summer with a proprietary slow release fertilizer or as directed in the catalogue. For gardens in rural settings it may be practical to use rabbit guards on susceptible plants and trees.
For construction of ponds and water features see RHS book by Peter Robinson 'Water Gardening' ISBN 07513 03046.
Cleaning your new paving materials use Armillatox or a similar soap based product and use as directed we do not recommend using pressure washing methods.

Project:	**Wedding Venue Car Park Planting Scheme**
Clients:	**Mr J Garland**
Address:	**Mythe Farm Pinwall Lane Sheepy Magna**
Drawn by:	**Peter Stevens**
Date:	**January 2012**
Scale:	**1:100 @ A1**
Drawing No:	**160112 Car park B**

© Peter Stevens Garden Design 2012

PETERSTEVENS GARDENDESIGN
2 Merry Lees Road | Newbold Verdon | Leicestershire | LE9 9NR
T: 01455 824832 | M: 07711 759420 | E: psgdesign@msn.com
www.psgdesigns.co.uk