
TECHNICAL SPECIFICATION

NORMAL 6m


- Irreversible barrier with booms up to 6m
- Complete with electronic control board and mechanical clutch
- Available with or without hanging rack
- Reliability built in with low maintenance
- Cataphoresis treated stove enamelled finish to RAL 2008



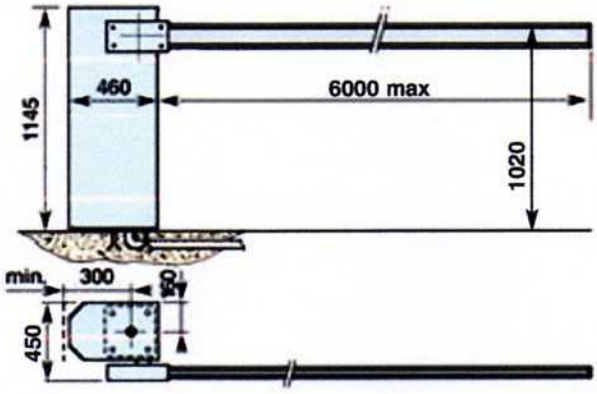

INDUSTRIAL 12m

- Irreversible barrier with booms up to 12m (10m with hanging rack)
- Complete with electronic control board and mechanical clutch
- Reliability built in with low maintenance
- Cataphoresis treated stove enamelled finish to RAL 2008

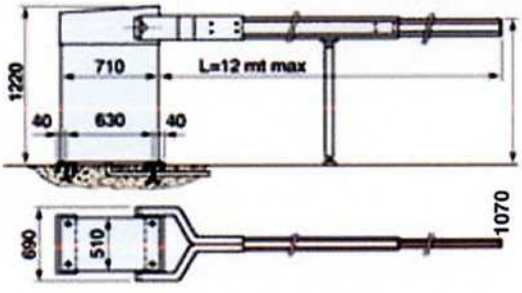



TECHNICAL INFORMATION			
Technical Data		Normal	Industrial
Max Boom Length	m	6	7.5-12
Opening Time	s	11	16
Max Torque	Nm	300	600
Power supply	V	230	415
Power absorbed	A	0.6	1.2
Weight	Kg	145	210
Protection	IP	55	55
Duty Rating		Intensive	Semi Intensive