


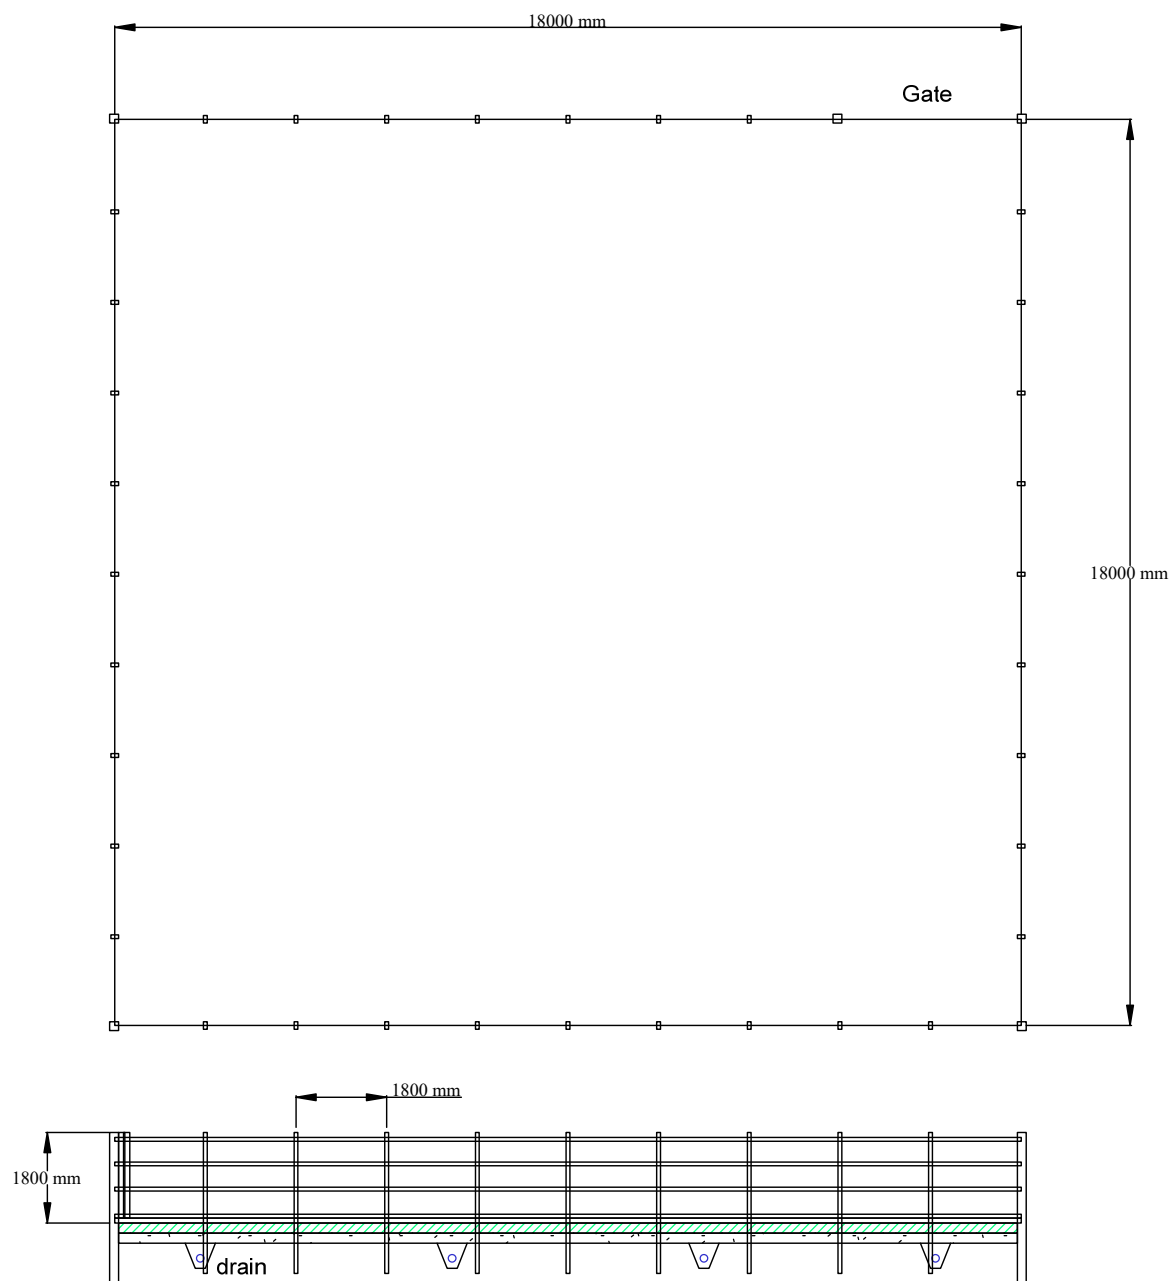

TYPICAL SECTION

Dimension to be checked on site, tolerance +/- 20mm/m

Ground excavated to level. Top soil and sub soil laid to side for landscaping.

100 mm perforated drains laid to 150 lateral, trench backfilled with no fines 40 - 20 mm stone.

Woven geotextile laid across site G9, 200 mm clean 40 - 20 mm stone laid level and rolled to give even compaction.

Non-Woven geotextile NW8 ground fabric laid across site and fastened to fence posts.

Overlain with 200 mm Cushionride wood fibre or similar equestrian surface.

Corner posts 175 x 175 x 3000 wood, Fence posts 150 x 75 x 2800 mm at 1800 centres, Cant Rails 3600 x 100 x 50 mm.
Featheredge board 125 x 1800 lapped 25mm, Kick board 100 x 25 mm.

Gate wooden with galv hinges and spring loaded fastener. All timber pressure treated with preservative.

Fields Farm

TITLE

Lunge Pen
Newbold Road
Barlestone CV130DT

SIZE

A3

DATE

Dec 2023

DWG NO

P/CI/FFB/NM/23/03

REV

SCALE

1 / 150

SHEET

1 of 1