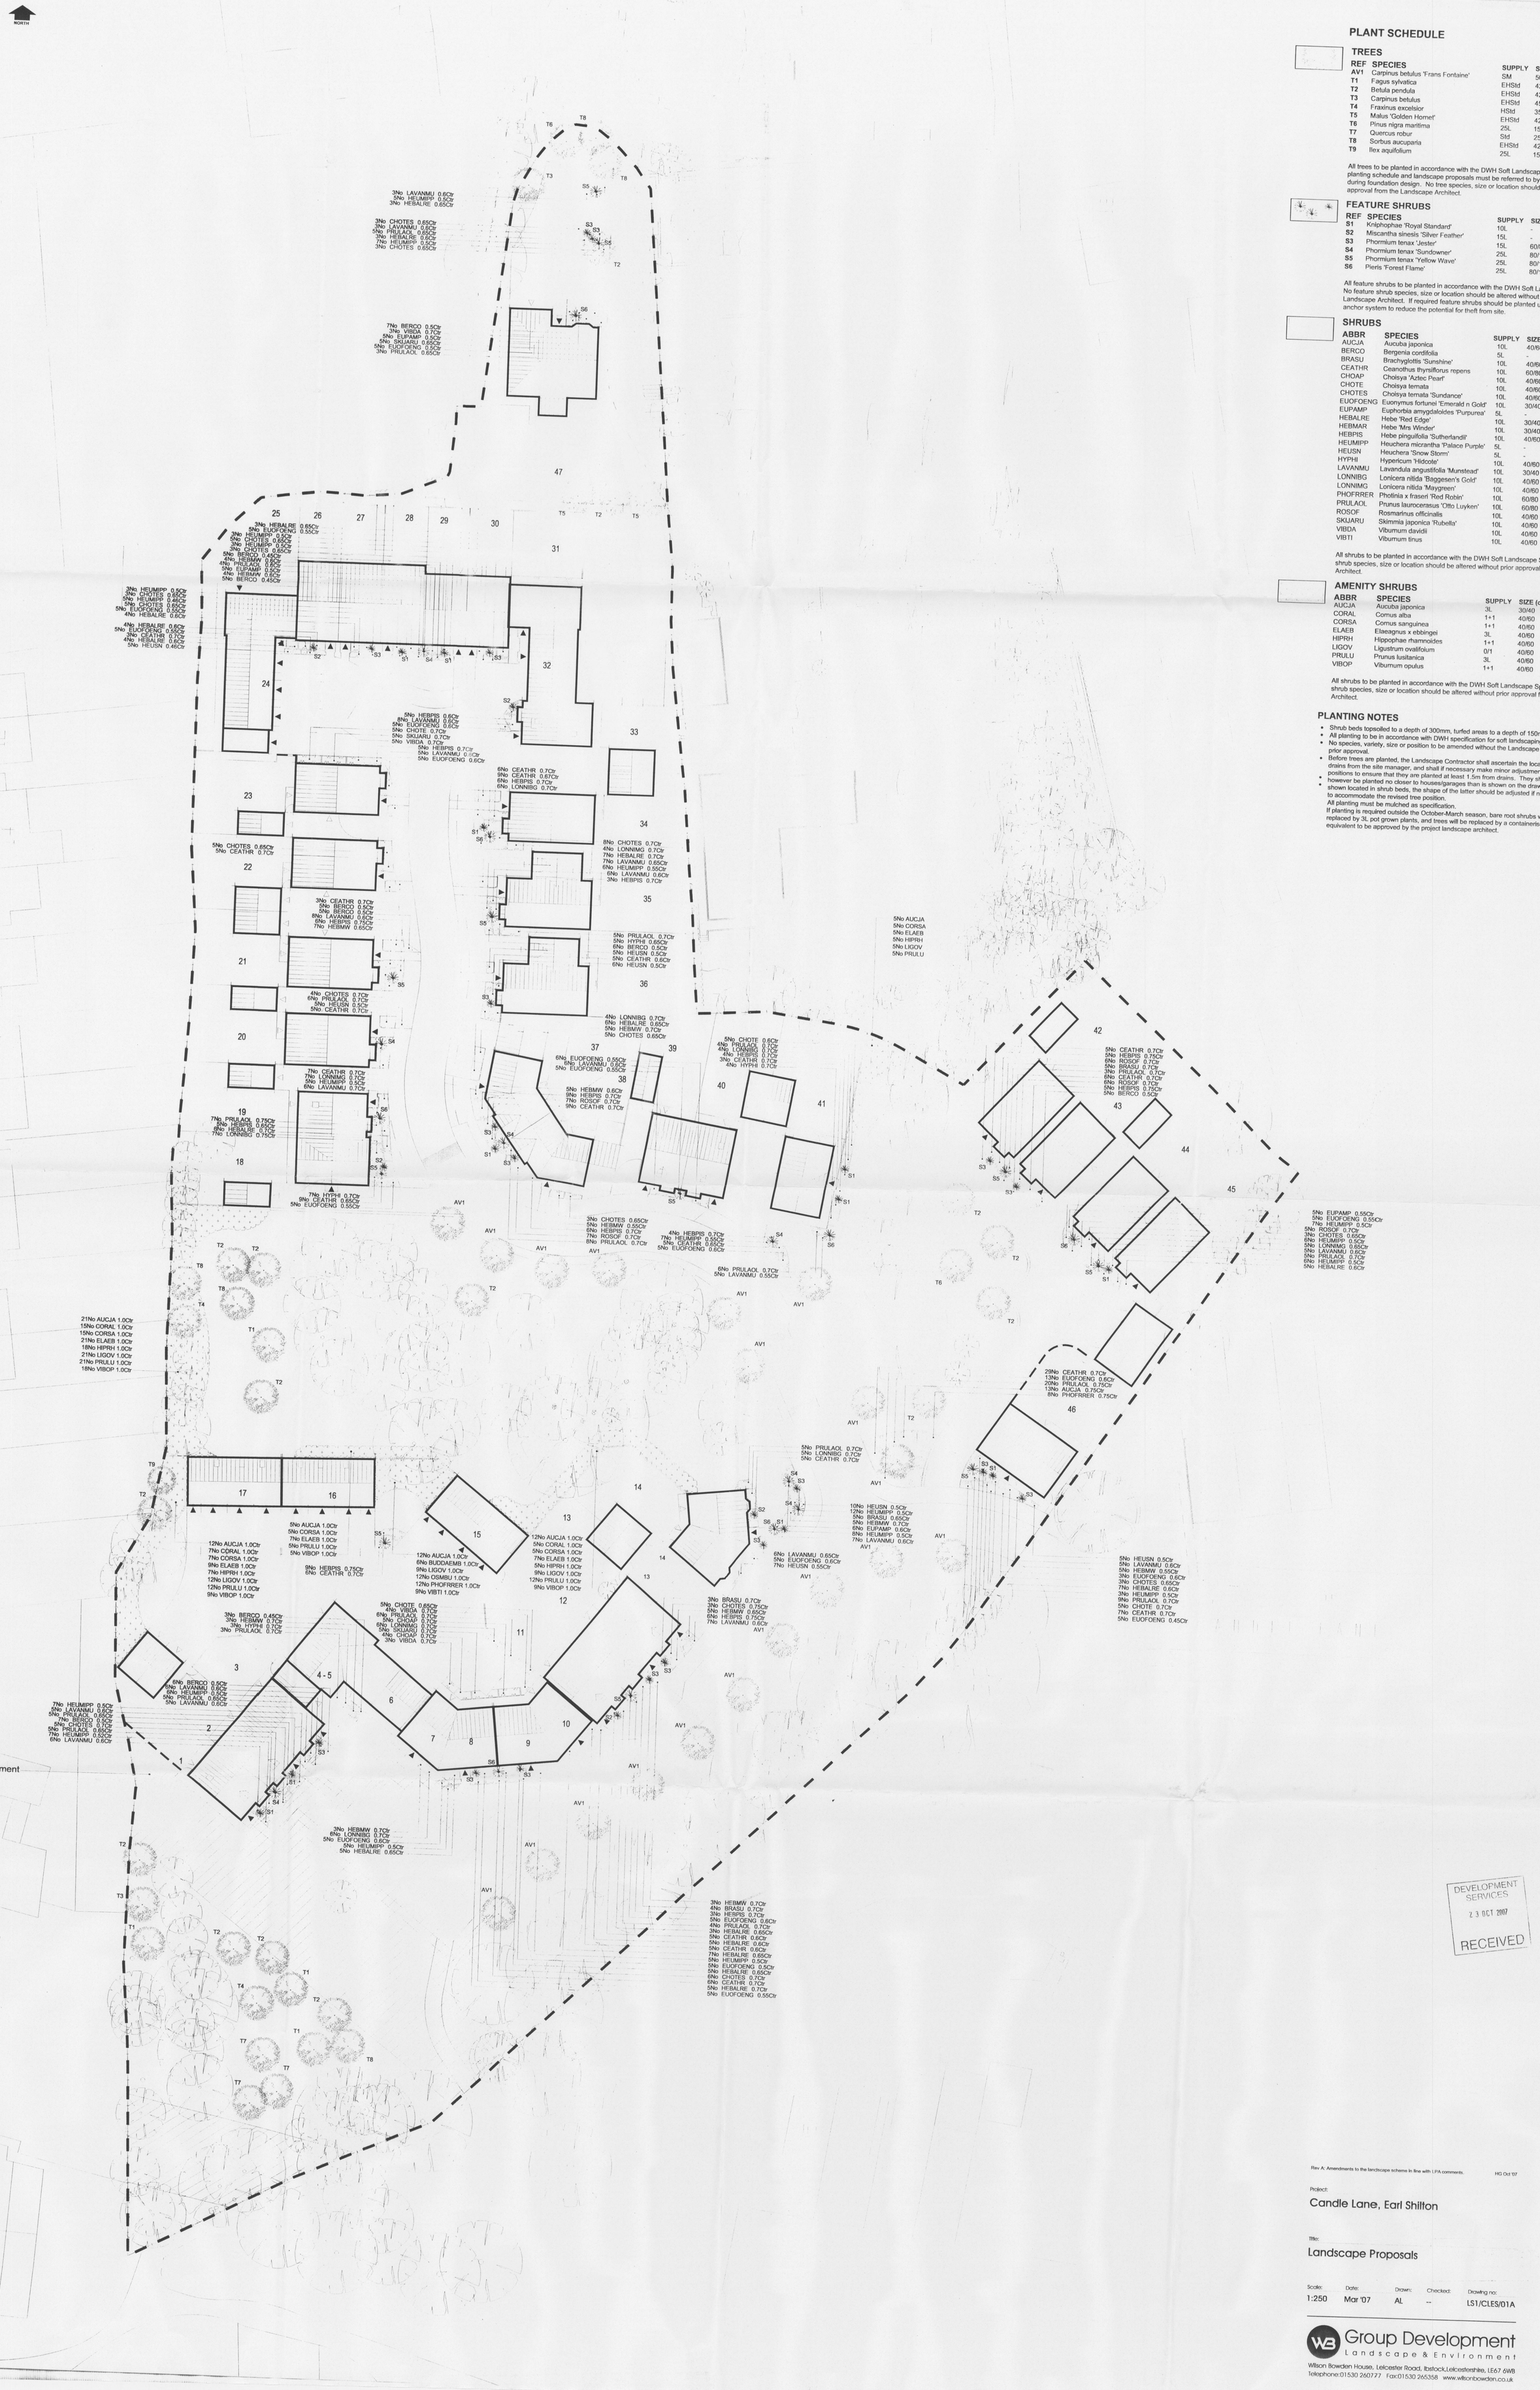


PLANT SCHEDULE

TREES

REF	SPECIES	SUPPLY	SIZE (cm)	GIRTH (cm)
AV1	Carpinus betulus 'Frans Fontaine'	SM	500+	20/25
T1	Fagus sylvatica	EHStd	425/600	14/16
T2	Betula pendula	EHStd	425/625	16/18
T3	Carpinus betulus	EHStd	450/650	18/20
T4	Fraxinus excelsior	HStd	350/425	12/14
T5	Malus 'Golden Hornet'	EHStd	425/600	16/18
T6	Pinus nigra maritima	25L	150/175	-
T7	Quercus robur	Std	250/300	8/10
T8	Sorbus aucuparia	EHStd	425/600	14/16
T9	Ilex aquifolium	25L	150/175	-

All trees to be planted in accordance with the DWH Soft Landscape Specification. The tree planting schedule and landscape proposals must be referred to by the Structural Engineer during foundation design. No tree species, size or location should be altered without prior approval from the Landscape Architect.

FEATURE SHRUBS

REF	SPECIES	SUPPLY	SIZE (cm)	HABIT
S1	Kniphophae 'Royal Standard'	10L	-	Full pot
S2	Miscantha sinesis 'Silver Feather'	15L	-	Full pot
S3	Phormium tenax 'Jester'	15L	60/80	Triple crown
S4	Phormium tenax 'Sundowner'	25L	80/100	Triple crown
S5	Phormium tenax 'Yellow Wave'	25L	80/100	Triple crown
S6	Pieris 'Forest Flame'	25L	80/100	Bushy

All feature shrubs to be planted in accordance with the DWH Soft Landscape Specification. No feature shrub species, size or location should be altered without prior approval from the Landscape Architect. If required feature shrubs should be planted using a Platipus shrub anchor system to reduce the potential for theft from site.

SHRUBS

ABBR	SPECIES	SUPPLY	SIZE (cm)	HABIT
AUCJA	Aucuba japonica	10L	40/60	Bushy
BERCO	Bergenia cordifolia	5L	-	Full pot
BRASU	Brachyglottis 'Sunshine'	10L	40/60	Bushy
CEATHR	Ceanothus thyrsiflorus repens	10L	60/80	Branched
CHOAP	Cholsya 'Aztec Pearl'	10L	40/60	Bushy
CHOTE	Cholsya ternata	10L	40/60	Bushy
CHOTES	Cholsya ternata 'Sundance'	10L	40/60	Bushy
EUOFOENG	Euonymus fortunei 'Emerald n Gold'	10L	30/40	Bushy
EUPAMP	Euphorbia amygdaloides 'Purpurea'	5L	-	Full pot
HEBALRE	Hebe 'Red Edge'	10L	30/40	Bushy
HEBMAR	Hebe 'Mrs Winder'	10L	30/40	Bushy
HEBPIS	Hebe pinguifolia 'Sutherlandii'	10L	40/60	Bushy
HEUMIPP	Heuchera micrantha 'Palace Purple'	5L	-	Full pot
HEUSN	Heuchera 'Snow Storm'	5L	-	Full pot
HYPHI	Hypericum 'Hidcote'	10L	40/60	Bushy
LAVANMU	Lavandula angustifolia 'Munstead'	10L	30/40	Bushy
LONNIBG	Lonicera nitida 'Baggesen's Gold'	10L	40/60	Bushy
LONNIMG	Lonicera nitida 'Maygreen'	10L	40/60	Bushy
PHOFRRER	Photinia x fraseri 'Red Robin'	10L	60/80	Branched
PRULAOL	Prunus laurocersus 'Otto Luyken'	10L	60/80	Bushy
ROSOF	Rosmarinus officinalis	10L	40/60	Bushy
SKIJARU	Skimmia japonica 'Rubella'	10L	40/60	Bushy
VIBDA	Viburnum davidii	10L	40/60	Bushy
VIBTI	Viburnum tinus	10L	40/60	Bushy

All shrubs to be planted in accordance with the DWH Soft Landscape Specification. No shrub species, size or location should be altered without prior approval from the Landscape Architect.

AMENITY SHRUBS

ABBR	SPECIES	SUPPLY	SIZE (cm)	HABIT
AUCJA	Aucuba japonica	3L	30/40	Bushy
CORAL	Cornus alba	1+1	40/60	Branched
CORSA	Cornus sanguinea	1+1	40/60	Branched
ELAEB	Elaeagnus x ebbingei	3L	40/60	Bushy
HIPRH	Hippophae rhamnoides	1+1	40/60	Branched
LIGOV	Ligustrum ovalifolum	0/1	40/60	Branched
PRULU	Prunus lusitanica	3L	40/60	Bushy
VIBOP	Viburnum opulus	1+1	40/60	Branched

All shrubs to be planted in accordance with the DWH Soft Landscape Specification. No shrub species, size or location should be altered without prior approval from the Landscape Architect.

PLANTING NOTES

- Shrub beds topsoiled to a depth of 300mm, turfed areas to a depth of 150mm.
- All planting to be in accordance with DWH specification for soft landscaping.
- No species, variety, size or position to be amended without the Landscape Architects prior approval.
- Before trees are planted, the Landscape Contractor shall ascertain the location of drains from the site manager, and shall if necessary make minor adjustments to tree positions to ensure that they are planted at least 1.5m from drains. They should however be planted no closer to houses/garages than is shown on the drawing, and if shown located in shrub beds, the shape of the latter should be adjusted if necessary to accommodate the revised tree position.
- All planting must be mulched as specification.

If planting is required outside the October-March season, bare root shrubs will be replaced by 3L pot grown plants, and trees will be replaced by a containerised equivalent to be approved by the project landscape architect.

DEVELOPMENT SERVICES
23 OCT 2007
RECEIVED

Rev A: Amendments to the landscape scheme in line with LPA comments. HG Oct '07

Project:
Candle Lane, Earl Shilton

Title:
Landscape Proposals

Scale:	Date:	Drawn:	Checked:	Drawing no:
1:250	Mar '07	AL	--	LS1/CLES/01A

Group Development
Landscape & Environment
Wilson Bowden House, Leicester Road, Ibstock,Leicestershire, LE67 6WB
Telephone:01530 260777 Fax:01530 265358 www.wilsonbowden.co.uk