
combisol


combisol 2500 type K

E427/100


10/06

Bracket




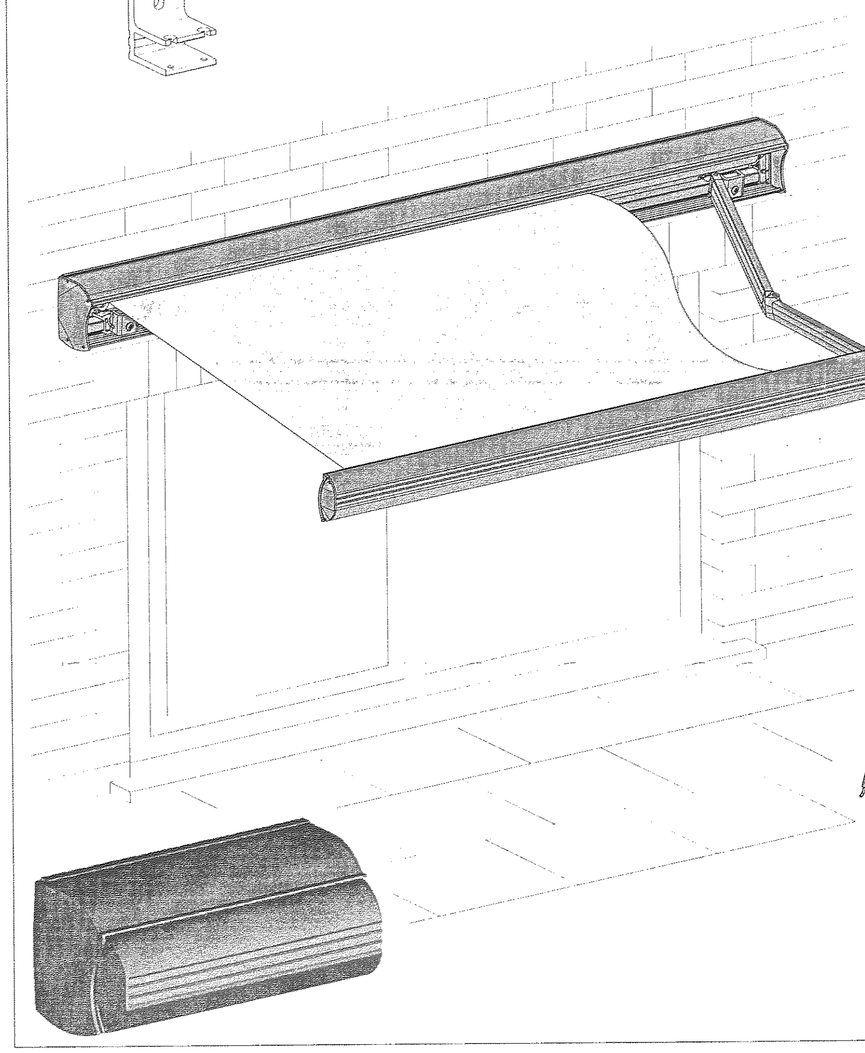

Gearbox operation

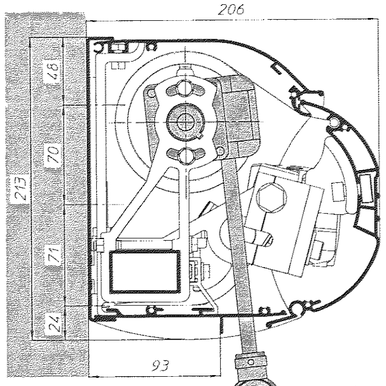

Electric operation

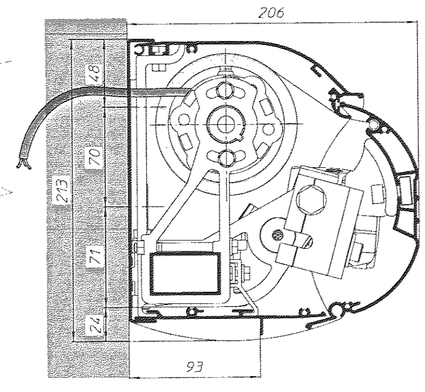

APPLICATION

Awning with all parts mounted on a galvanised and powder coated steel carrying bar (50 x 30 mm). The basic mechanism comes in various forms with a choice of 2 different front profiles allowing up to four different combinations in any variation from an open awning to a fully closed cassette. The blind is installed against a façade or under a balcony. Sun protection is maximised without restricting the view outside.
Fitting is reduced to fixing of the wall brackets, attachment of the awning and setting the pitch. Both manual or electric operation. Ideal for domestic patios, shop windows or as an extension to a restaurant or a pub garden, but equally can be used for industrial and office buildings.

TYPES - DIMENSIONS

If built in cassetted format, the case section is 213 mm high by 206 mm deep. There are 7 different projections available: 1,50 / 1,75 / 2,00 / 2,25 / 2,50 / 3,00 and 3,50 m. As well as the straight projection and the head height related to the armlength and the drop as the minimum width related to the armlength can be found in several charts and tables.

Max. dimensions:

- width: - 1 panel: 6,50 m (with cradle).
  - 2 panels: 12,00 m (with cradle or jockey-roller)
  - 3 panels: 18,00 m (with cradle or jockey-roller)
- armlength: 3,50 m.
- surface: - 1 panel: 18,00 m².
  - 2 panels: 36,00 m² (with cradle or jockey-roller)
  - 3 panels: 54,00 m² (with cradle or jockey-roller)

FINISH

- Case, arms and front profile are powder coated white RAL 9010, brown RAL 8019 or ivory RAL 1015.
- 100% acrylic fabric (Collection Orchestra).

OPTIONS

- **Case, arms and front profile**
  - can be powder coated in any RAL colour.
  - ceiling and additional wall brackets are possible.
- **Fabric**
  - valances in different shapes and side cloths.
  - sign writing.
  - special fabrics: waterproof, collection Symphony.
- **Electrical operation**
  - motor "RTS"
  - electric cable longer than 3m (5m or 10m).
  - automation: group control, remote control, sun- and windsensor, clock.

MAINTENANCE - REPAIR

- Maintenance: clean with water and non-aggressive solvents, remove the dust from the fabric with a semi soft brush. Hinge joints and turning points should be greased with a drop of thin oil every year.
- In case of a repair the roller-tube is accessible and the awning is easy detachable in order to repair it in the factory.

FIRE CLASSIFICATION

- Frame in aluminium: no classification.
- Fabric: - acrylic - Orchestra - no classification.

GENERAL

- Manufacture: everything is custom-made.
- Prices, documentation and colour range: apply to WINSOL UK Ltd or approved dealers.
- Guarantee: see general guarantee stipulations.
- Specified technical assistance and references on demand.
- Description and specifications: please consult technical brochure.