

Changes Key:

01 - Dock concrete prowall height amended.

02 - Addition of taller dock shelters.

03 - Revisions to louvre sizes.

NOTE:

**Changes highlighted are against drawing 'Unit 2
Elevations Drg No: 22113 - P2005 Rev: E' approved on 5
May 2022 (Application No. 22/00430/FUL)**

Elevation Marker Key:

Horizontally laid Built-up Cladding System:

E1 Euroclad Elite built-up cladding system
Profile: Elite 55. To achieve U-Value of 0.35W/m²K
Colour: Sirius (RAL 9006)
Finish: Colorcoat Prisma

E2 Euroclad Elite built-up cladding system
Profile: Elite 55. To achieve U-Value of 0.35W/m²K
Colour: Anthracite (RAL 7016)
Finish: Colorcoat Prisma

Vertically laid Built-up Cladding System:

E3 Euroclad Elite built-up cladding system
Profile: Elite 51. To achieve U-Value of 0.35W/m²K
Colour: Pure Grey (RAL 000 55 00)
Finish: Colorcoat Prisma

Composite Wall Panel Cladding System:

E4 Kingspan Composite Microrib panel laid horizontally. To achieve
U-Value of 0.35W/m²K
Colour: Anthracite (RAL 7016)
Finish: Colorcoat Prisma

Roof Cladding System:

E5 Euroclad Elite Twinskin System
Profile: Euroclad 0.7mm thick 32/1000 forward profile. To achieve
U-Value of 0.25W/m²K
Colour: Goosewing Grey (RAL 7038)
Finish: HPS200 Ultra

Additional Element Key:

E6 Polyester powder coated aluminium eaves & verge fascia flashing
(curved not faceted to gables), minimum 0.7mm thick
Finish: Colorcoat HPS200 Ultra 7038 Goosewing Grey

E7 Steel horizontal feature flashing
Finish: Colorcoat Prisma RAL 7016 Anthracite

E8 Pre-cast dock retaining walls

E9 Standard Hormann Model SPUF45, 42mm thick insulated
sectional level access door or equivalent approved. To achieve U-
Value of 0.35W/m²K
Colour: Pure Grey (RAL 000 55 00) Ext.
Colour: Grey White (RAL 9002) Int.

E10 Standard Hormann Model SPUF45, 42mm thick insulated
sectional dock door or equivalent approved. To achieve U-Value
of 1.5W/m²K
Colour: Pure Grey (RAL 000 55 00) Ext.
Colour: Grey White (RAL 9002) Int.

E11 APA TB50 Facade Systems curtain walling & APA ST70 windows
or equal approved, powder colour-coated thermally broken
aluminium system (double glazed to achieve U-Value of 2.2W/m²K
/ LT Value / Reflectance G Value as required by Building
Regulations & to meet SBEM model requirements by others).
Finish: Anthracite (RAL 7016)
Glazing Tint: TBC

E12 Personnel Fire Escape Doors. To achieve U-Value of 1.6W/m²K
Colour: Pure Grey (RAL 000 55 00) to all except personnel doors
within Sirius colour cladding, then to match adjacent cladding


E13 Louvre
Colour: As per adjacent cladding

**01 - Prowall reduced in
height from 5m to 4.8m.**

**02 - Dock door increased in
height from 3.5m to 4.5m.**

**03 - Louvres have increased in
width from 600mm to 1650mm
to reflect detailed M&E design.**

**03 - Louvre has decreased in
height from 1700mm to 1550mm
to reflect detailed M&E design.**

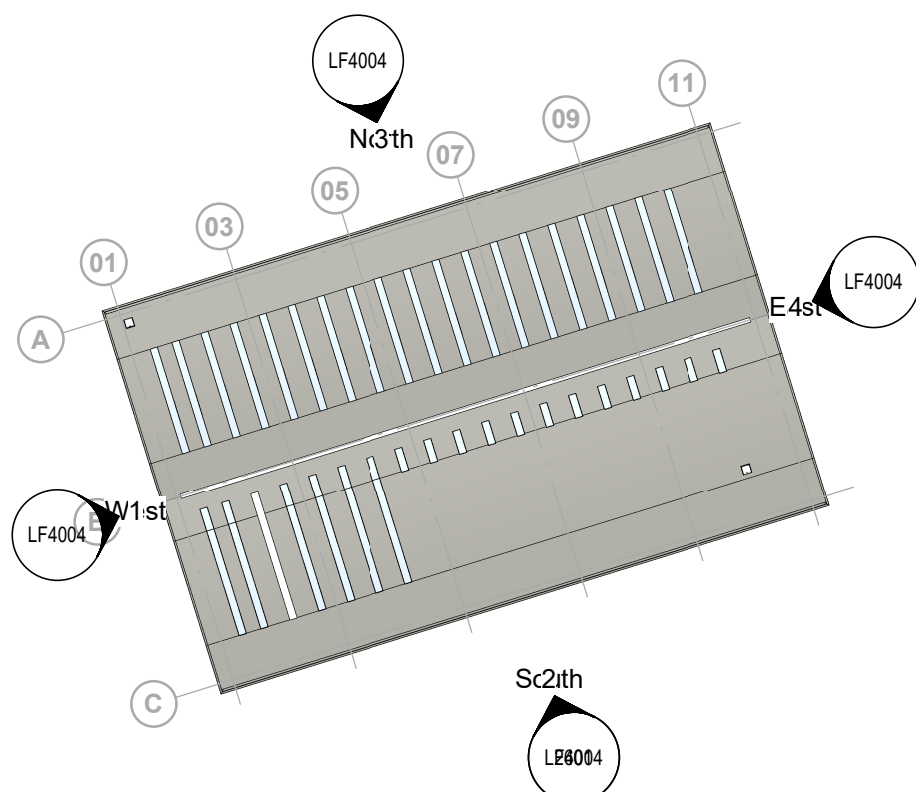

Unit 2 - Elevation Location Plan Copy 1
1 : 1000

P.1 Initial Issue JB AS 16.02.23

rev amendments by ckd date

DZ3 Hinckley Park, Avery Way

Unit 2 - NMA App - Building Elevations

Information Container LOIN	
LOD 3	LOI 2



Newark Beacon, Cafferata Way, Newark, Nottinghamshire, NG24 2TN
t +44 (0)1636 653027 e info@umcarchitects.com

RIBA PoW Stage:	Stage 4 - Technical Design
Suitability / Status:	S3
Drawn / Checked:	KF / GH
Date:	15.06.22
Scale:	As indicated @ A1
UMC Project Number:	22113
Document Reference:	Drawing no: Revision:
P22-034-UMC-U4-ZZ-DR-A-	2701 P.1

PLANNING
THIS DRAWING IS FOR PLANNING CONSIDERATION ONLY
AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE