

DATE: 21 March 2025
DESIGNER: Nick Smith
PROJECT No: 3125
PROJECT NAME: Leicester Road, Earl Shilton



Nick Smith Associates
Lighting to the end of the tunnel


Design prepared with S9 AS64_LED_142W_GR5_3000K_FG
also checked with A64_GEN2_LED_129W_CLO_GR5
_Blue)_G0_3000K_FG.ies which works slightly better at the same
spacings

Roadway Lighting Report

PREPARED BY: Nick Smith Associates Ltd
36 Foxbrook Drive, Chesterfield, S40 3JR
e: mail@nicksmithassociates.com
w: www.nicksmithassociates.com
t: 01246 229444
f: 01246 588604

Roadway Report Summary

Layout

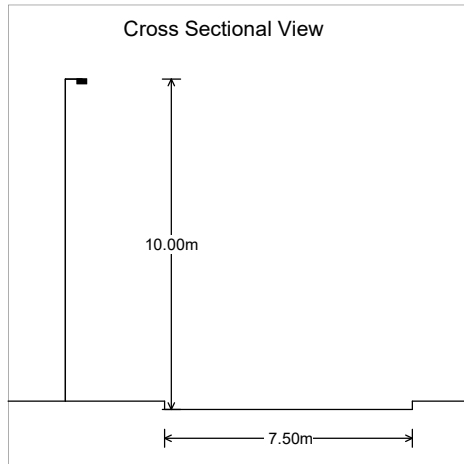

Road Data

Calculation Grid	EN13201 Luminance
Width (m)	7.50
No. of Lanes	2
Road Surface	C2
Q0	0.07
Lane Width (m)	3.75
Rei Width (m)	3.75

Main Lighting

Column Data

Configuration	Single Sided Left
Spacing (m)	42.00
Height (m)	10.00
Tilt (deg)	0.00
Setback (m)	3.00
Outreach (m)	0.50
Overhang (m)	-2.50

Luminaire Data

Supplier	TRT Lighting
Type	A64_GEN2_LED_129W_CLO_GR5_Blue)_G0_3000K_FG
Lamp(s)	42 0129 0000 100
Lamp Flux (klm)	17.98
File Name	A64_GEN2_LED_129W_CLO_GR5_Blue)_G0_3000K_FG.ies
Maintenance Factor	0.83
Lum. Int. Class	None




Results

Main


Complies with M4

Lavmin	1.26 (1)
Lmin	0.67 (1)
Lmax	2.54 (2)
U0min	0.50 (2)
U1min	0.77 (1)
TI(%)	14.86 (1)
Rei	0.71

Number in brackets is the Observer Lane for Result shown.

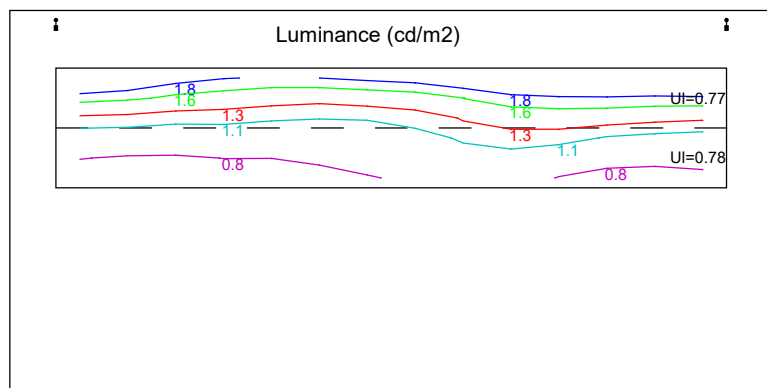


Energy performance indicators

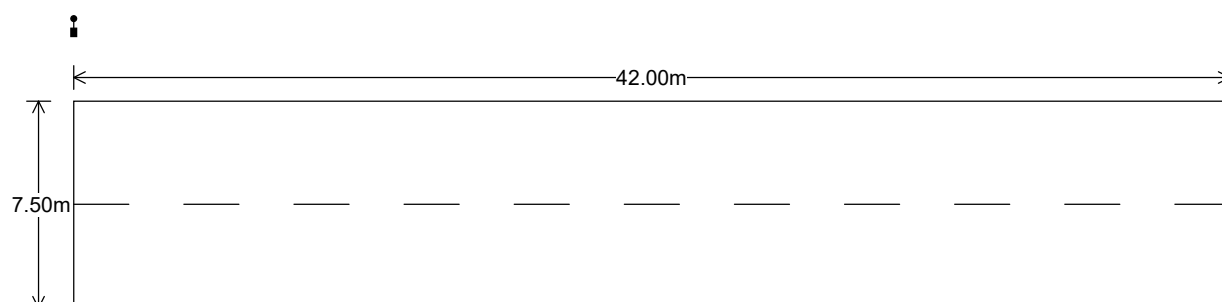

Power Main Luminaire(W)	142.00
Parasitic Power(W)	0.00
Area(m ²)	315
Hours per Year	4100
Power Density(mW/lx/m ²)	24.52
AECI(kWh/m ²)	1.85


Polar Diagram

Main Luminaire A64 GEN2 LED 129W CLO GR5 Blue) G0 3000K FG

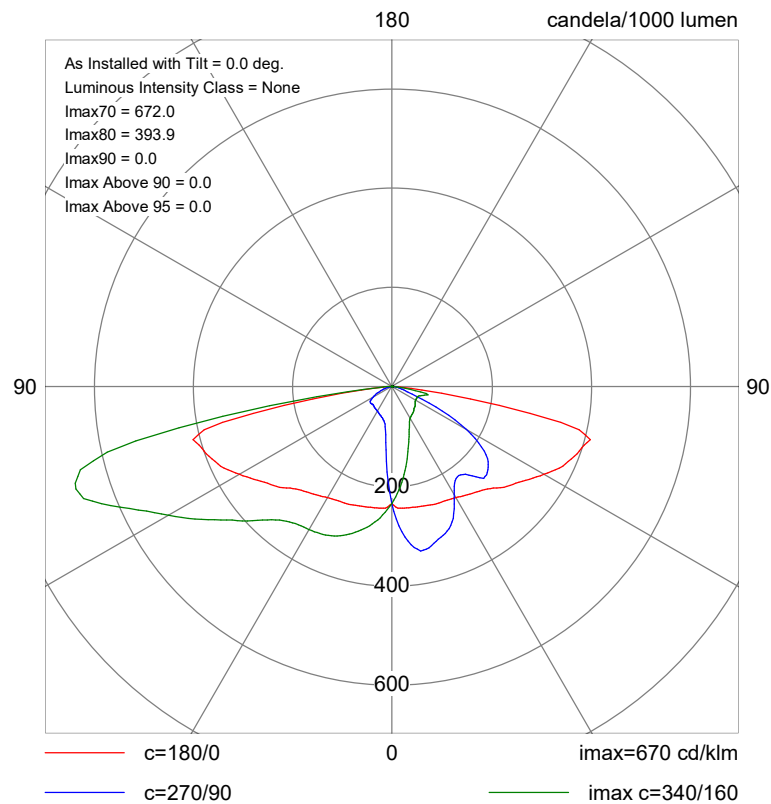

Luminance (cd/m²)

Observer in Lane 1

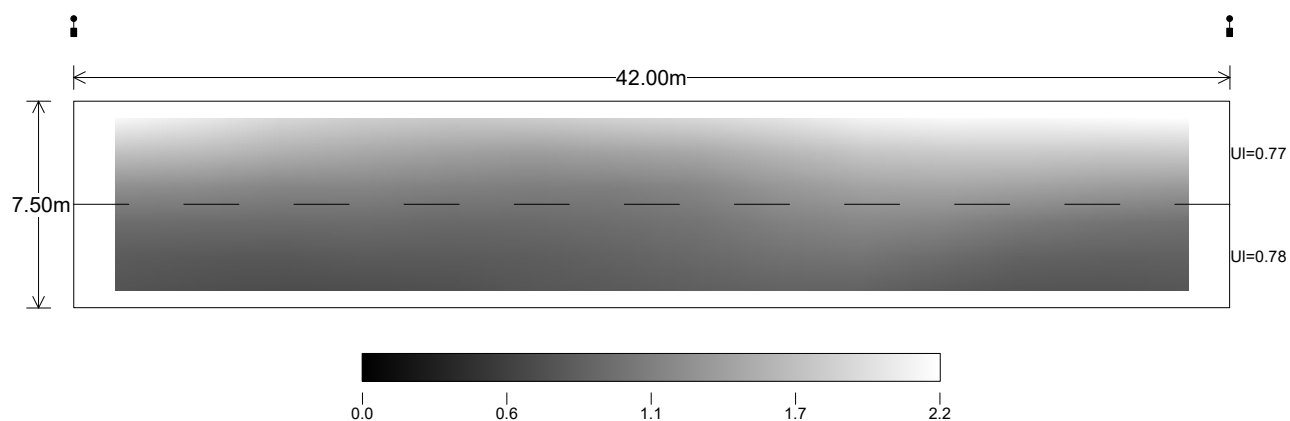

Main Results


Observers in all Lanes

Lavmin	1.26 (1)
Lmin	0.67 (1)
Lmax	2.54 (2)
U0min	0.50 (2)
Ulmin	0.77 (1)
Tlmax(%)	14.86 (1)
Rei	0.71

Number in brackets is the
Observer Lane for Result shown.

Luminance (cd/m²)

Observer in Lane 1

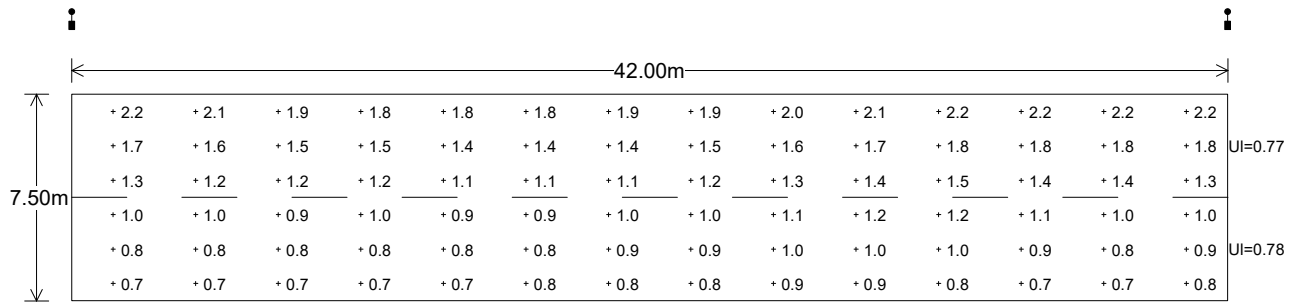

Main Results


Observers in all Lanes

Lavmin	1.26 (1)
Lmin	0.67 (1)
Lmax	2.54 (2)
U0min	0.50 (2)
Ulmin	0.77 (1)
Tlmax(%)	14.86 (1)
Rei	0.71

Number in brackets is the
Observer Lane for Result shown.

Luminance (cd/m²)

Observer in Lane 1

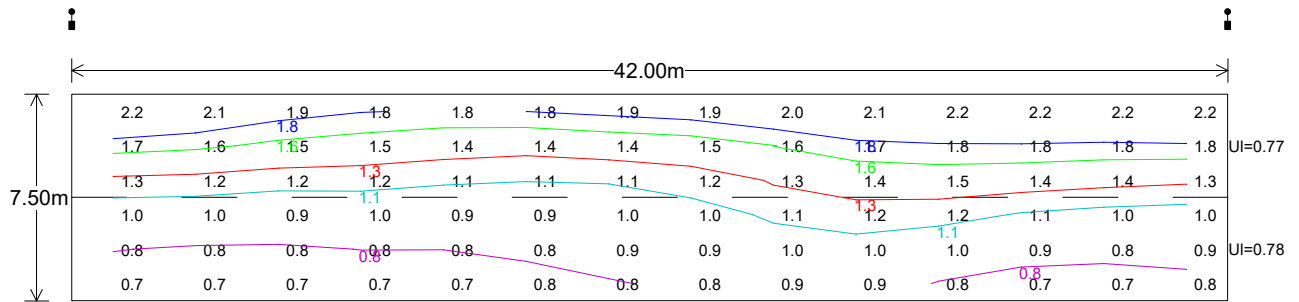

Main Results

Observers in all Lanes

Lavmin	1.26 (1)
Lmin	0.67 (1)
Lmax	2.54 (2)
U0min	0.50 (2)
Ulmin	0.77 (1)
Tlmax(%)	14.86 (1)
Rei	0.71

Number in brackets is the
Observer Lane for Result shown.

DATE: 21 March 2025
PROJECT No: 3125

DESIGNER: Nick Smith
PROJECT NAME: Leicester Road, Earl Shilton



Comparison Table

Calculation Grid: 2015:EN13201 Luminance Road Surface: C2 Q0: 0.07 No. of Lanes: 2 Lane Width: 3.75
Configuration: Single Sided Left

No.	Luminaire	Lamp	Flux	MF	Spacing	Overhang	Height	Tilt	Lav	U0	UI	TI	Power Density	AECI
1	S9 AS64_LED_142V	42 0142 0000	18.98	0.83	38.00	-2.50	10.00	0.00	1.42	0.47	0.79	14.90	0.00	0.00
2	A64_GEN2_LED_12	42 0129 0000	17.98	0.83	42.00	-2.50	10.00	0.00	1.26	0.50	0.77	14.86	0.00	0.00