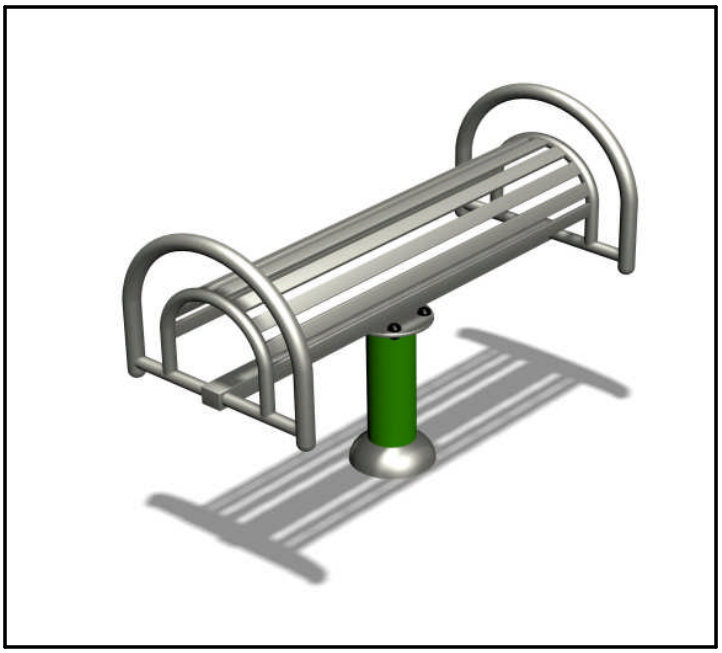


# Xerscape

## Agility Bench

| | |
|---|---|
| PROD. CODE | T2001A |
| SIZE | H-1040 W-860 D-578 |
| AGE RANGE | 12 to Adult |
| F/ FALL HEIGHT | |
| HEAVIEST PART | |
| TOTAL WEIGHT | |

WICKSTEED playscapes

## SPECIFICATION

Steel components are zinc coated and polyester powder painted

Aluminium is cleaned and polyester powder painted

Fixings are corrosion resistant and where exposed are anti-vandal

## INSTALLATION INSTRUCTIONS

1 Read installation instructions thoroughly before commencing installation of unit

2 Excavate hole 600 x 600 x 600 deep - see Figure 1

3 Position the below ground fixing (see Figure 2) centrally in the hole so the 4 bolts are pointing upwards ensuring that the top plate is flush with the finished surface level

4 Check alignment of bolts and backfill the hole with concrete ensuring that the below ground fixing is perpendicular to the finished surface level

5 Allow the concrete to set for 24 hours

6 Position the unit on the below ground fixing and fit using one M20 washer and two M20 nuts per bolt as Figure 3. Ensure unit is perpendicular to the ground surface

7 Ensure all moving parts move freely without obstruction. If all parts are functioning correctly cover the base of the unit with the two halves of the ground cover and fasten with two M10 x 35 Pent button head screws

Note

Note

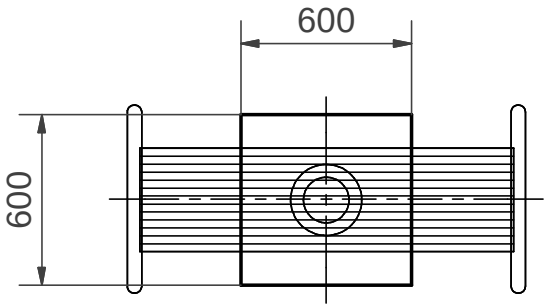



Figure 1

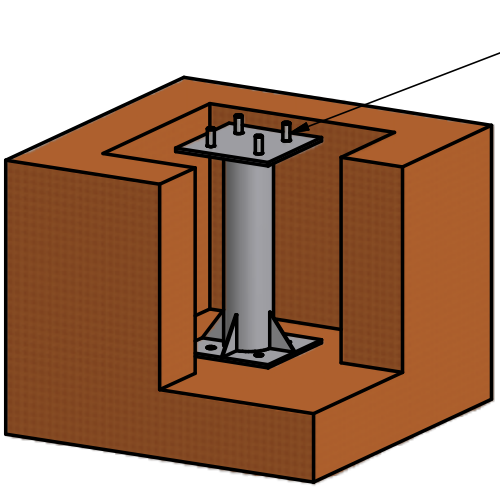



Figure 2

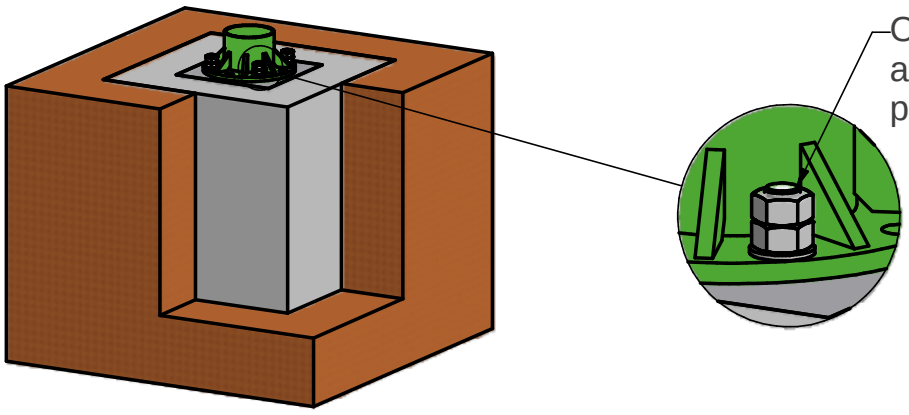



Figure 3

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| COMPILED AB | REV | 1 | 2 | | | | | | | |
| | ECN | 1566 | minor | | | | | | | |
| DATE: 24/06/08 | SIG. | AB | AB | | | | | | | |
| | DATE: | 30/09/08 | 13/02/09 | | | | | | | |