



THIS DRAWING IS TO BE READ IN CONJUNCTION WITH SEPARATE GROUP / SITE SPECIFIC CONSTRUCTION NOTES AND MATERIALS SPECIFICATION.

All tree and shrub locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out in Chapter 4 of the NHBC Standards. The landscape Contractor must ensure that plant material is planted in the locations shown and with NO SUBSTITUTIONS made without consulting the Group Landscape Design Department. It is the Landscape Contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation so that no services are damaged or compromised by tree planting. Any changes to tree positions, species or specifications must be approved by the Group Landscape Design Department. Underground service strips are to be kept free of all plant material. Contractors must comply with all Health and Safety regulations and be aware of project/site specific information including referring to the information set out in the CDM drawings.


LEGEND

- EXISTING TREES
To be retained
- PROPOSED TREES
Heavy/Selected/Standard
See Schedule
- PROPOSED TREES
Conifers
See Schedule
- PROPOSED TREES
Heritage Apple Trees
See Schedule
- ORNAMENTAL HEDGE
See Schedule
- PROPOSED PLANTING
Shrubs/Herbaceous/Grasses
See Schedule
- TURF
with area (m²)
- AMENITY GRASS AREAS
Wear Tolerant Turfgrass Mixture
Emergate EG22 sown at 25g/m²
Kept mown short to 40mm
- WILDFLOWER MEADOW
Special General Purpose Meadow Mixture
Emergate EM6 sown at 4 g/m²
(existing grassland to be retained and managed, where remediation is required see as above)
- SEASONAL WETLANDS
Meadow Mixture for Seasonally Wet soils
Emergate EM8 sown at 4 g/m²
- SENSORY MIX
See Schedule
- BULB PLANTING
See Schedule
Bulbs scattered by hand and planted where they fail to create a natural look.
- EASEMENTS

CDM LEGEND

- Caution overhead/underground services.
- Sewer assessment.
- Trees have protection order in place, guarding required.

NOTES:
Principal contractor to ensure all health and safety procedures are being correctly followed in relation to all temporary works.

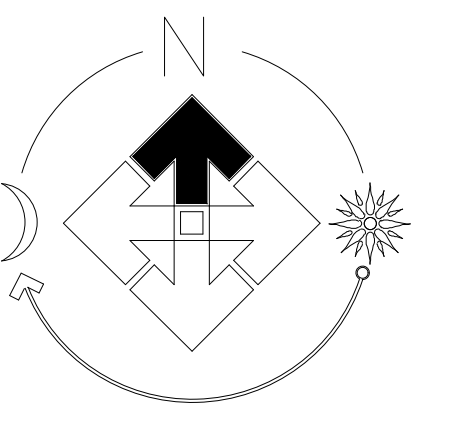


PLOT NUMBER SHEET REF.

SHEET 001 (261-287, 311-319)
SHEET 002 (288-310, 379-399)
SHEET 003 (320-339, 349-369, 375-378)
SHEET 004 (340-348, 370-374)

FOR SPECIFICATION, PLANTING DETAILS & SCHEDULE SEE DRAWING EMxxx-LS-005

POS/INFRASTRUCTURE FROM FPCR PROPOSALS INCLUDING PLANTING & SURFACING

SHEET LAYOUT LOCATION PLAN
NOT TO SCALE

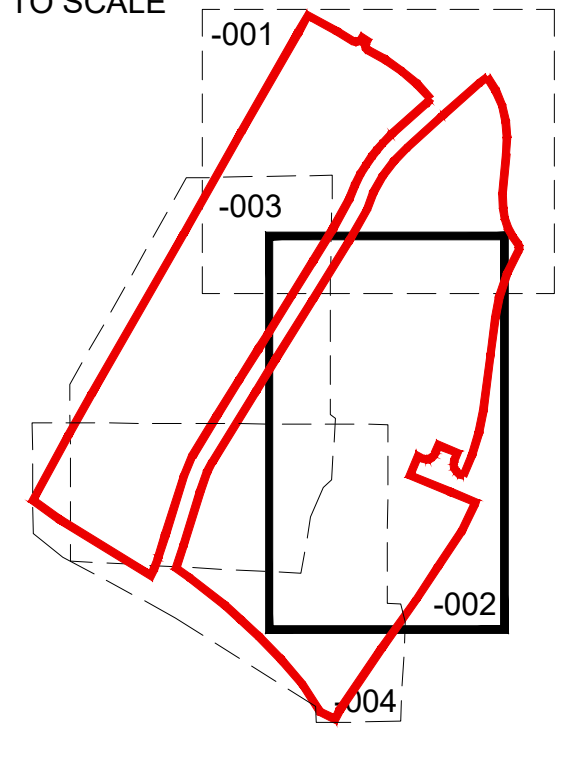

Revision	Date
1	17/09/21
2	28/09/21

Job	Normandy Fields, Hinckley Ph 7
Title	Site Landscaping
Scale	1:200 @ A0
Date	Sept 2021
Drawn	JMS
Checked	PmJ

THIS DRAWING AND THE BUILDING WORKS DEPICTED ARE THE COPYRIGHT OF J.S. BLOOR (SERVICES) LIMITED. NO LIABILITY WILL BE ACCEPTED FOR ANY DAMAGE OR LOSS OF PROFITS OR REVENUE INCURRED BY ANY PERSONS EXCEPT BY WRITTEN PERMISSION. NO LIABILITY WILL BE ACCEPTED FOR ANY DAMAGE OR LOSS OF PROFITS OR REVENUE INCURRED BY ANY PERSONS EXCEPT BY WRITTEN PERMISSION.

BLOOR HOMES
J.S. BLOOR (SERVICES) LIMITED
ASBURY ROAD, MEASHAM, SWADLINCOTE, DERBYSHIRE DE12 7JP
TELEPHONE 01530 270100 FACSIMILE 01530 272006

Drawing No.
EMxxx-LS-002b

NORMANDY FIELDS, HINCKLEY PH 7


LEGEND

- EXISTING TREES
To be retained
- PROPOSED TREES
Heavy/Selected/Standard
See Schedule
- PROPOSED TREES
Conifers
See Schedule
- PROPOSED TREES
Heritage Apple Trees
See Schedule
- ORNAMENTAL HEDGE
See Schedule
- PROPOSED PLANTING
Shrubs/Herbaceous/Grasses
See Schedule
- TURF
with area (m²)
- AMENITY GRASS AREAS
Wear Tolerant Turfgrass Mixture
Emsgate EG22 sown at 25g/m²
Kept mown short to 40mm
- WILDFLOWER MEADOW
Special General Purpose Meadow Mixture
Emsgate EM3 sown at 4 g/m²
(Grass to be retained and managed, where
remediation is required sown as above)
- SEASONAL WETLANDS
Meadow Mixture for Seasonally Wet soils
Emsgate EM8 sown at 4 g/m²
- SENSORY MIX
See Schedule
- BULB PLANTING
See Schedule
Bulbs scattered by hand and planted where
they fall to create a natural look
- EASEMENTS

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH
SEPARATE GROUP / SITE SPECIFIC CONSTRUCTION
NOTES AND MATERIALS SPECIFICATION.

All tree and shrub locations and species must
be taken into consideration by the project
Structural Engineer to ensure that foundation
design accords with the specifications set out
in Chapter 4 of the NHBC Standards.
The landscape Contractor must ensure that
plant material is planted in the locations
shown and with NO SUBSTITUTIONS made
without consulting the Group Landscape
Design Department. It is the Landscape
Contractor's responsibility to ensure that all
underground services have been located and
identified in advance of tree pit excavation so
that no services are damaged or compromised
by tree planting. Any changes to tree
positions, species or specifications must be
approved by the Group Landscape Design
Department. Underground service strips are
to be kept free of all plant material.
Contractors must comply with all Health and
Safety regulations and be aware of
project/site specific information including
referring to the information set out in the
CDM drawings.


SHEET LAYOUT
LOCATION PLAN
NOT TO SCALE

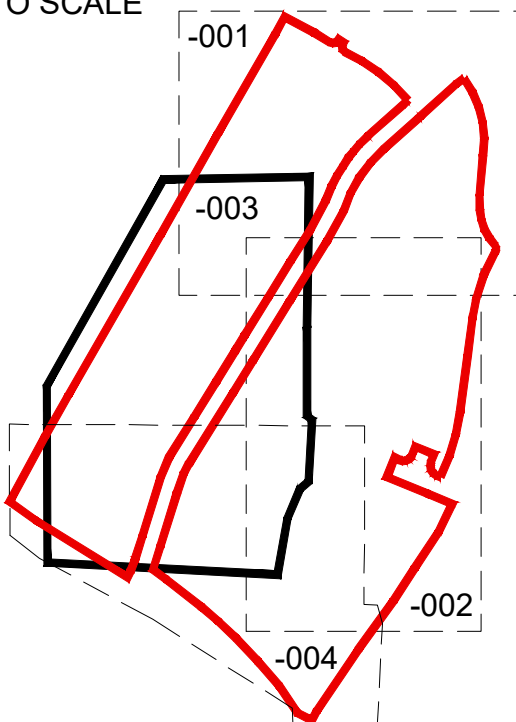

CDM LEGEND

Symbol	Brief description of risk
	Caution overhead / underground services.
	Severer assessment.
	Trees have protection order in place, guarding required.

NOTES:
Principal contractor to ensure all health and safety
procedures are being correctly followed in relation
to all temporary works.

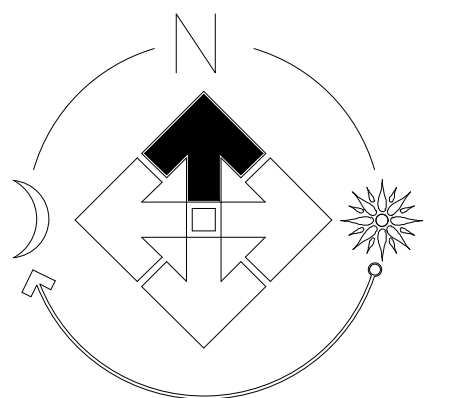

PLOT NUMBER
SHEET REF.

SHEET 001 (261-287, 311-319)
SHEET 002 (288-310, 379-399)
SHEET 003 (320-339, 349-369, 375-378)
SHEET 004 (340-348, 370-374)

FOR SPECIFICATION,
PLANTING DETAILS &
SCHEDULE SEE DRAWING
EMxxx-LS-005

Revision	Date
1	17/09/21
2	26/09/21

Job: Normandy Fields,
Hinckley Ph 7

Title: Site Landscaping

Scale: 1:200 @ A0 Drawn: JMS
Date: Sept 2021 Checked: PmJ

THIS DRAWING AND THE BUILDING WORKS DEPICTED ARE THE COPYRIGHT OF
J.S. BLOOR (SERVICES) LIMITED AND MAY NOT BE REPRODUCED OR
EXCEPT BY WRITTEN PERMISSION. NO LIABILITY WILL BE ACCEPTED FOR
MISUSE OR DAMAGE CAUSED BY OTHER PERSONS.

BLOOR HOMES

J.S. BLOOR (SERVICES) LIMITED
ASHBY ROAD, MEASHAM, SWADLINCOTE,
DERBYSHIRE DE12 7JP
TELEPHONE 01530 270100 FACSIMILE 01530 272006

Drawing No.
EMxxx-LS-003b

NORMANDY FIELDS, HINCKLEY PH 7

SPECIFICATION

- Applies to all landscape operations.

1 GENERAL
1.1 Preliminaries
Health and safety considerations are as the Bloor Homes Trade Specifications.
The following specification is in-line with the Trades Specification, however where there are specific requirements, these notes take precedence over the general guidance outlined within the Trade Specification.
The Site Manager should possess and distribute information to the relevant contractors detailing all underground services, engineering, drainage, lighting and ecological constraints and current proposed landscaping and landscaping operations.
Tree and hedgerow protection, subsoil cultivation, topsoiling and levelling/grading operations outlined below are the responsibility of the Site Agent unless stated otherwise.
Trees in hard surfaces will require engineered tree pits which will require construction when surfaces and service routes are being installed. Reference should be made to the appropriate tree pit detail drawing provided by the engineers and on the landscape drawings where applicable.
Where tree pits are within 5m of roads and services, and within 3m of other paved surfaces* a linear root barrier is to be installed in accordance with the manufacturer's instructions. The barrier should be as near as possible to the surface or service route to be protected to provide as much rooting area as possible for the tree.
*distances may vary according to requirements.
1.2 Subsoil Cultivation Considerations
All soft landscaping should be carried out by specialist landscape sub-contractor who is either British Association of Landscape Industries (BALI) accredited or can demonstrate a proven track record.
All plants shall conform to the specification details shown on this drawing, which are taken from the National Plant Specification, and must be well rooted, healthy stock. Plants required for hedging or massing must be uniform in every respect.
Plants must be in accordance with the relevant section of the current BS 3936 Nursery Stock Specification, and trees to the most current BS 8545 Trees: From Nursery to Independence in the Landscape .
Supplying nurseries shall not be registered under the UK Nursery Certification Scheme.
All plants shall be packed, transported and handled in accordance with the Code of Practice for Plant Handling as produced by the Committee for Plant Supply and Establishment (CPSE) and handling of trees to the most current BS 8545.
Any variance from the specification stated on each landscape drawing may result in a request to replace planting, at the contractor's expense.
1.3 Tendering and Implementation
Landscape Contractors are required to tender and implement as per the schedule and specification.
It is recognised that there are seasonal variations in plant availability and it may be necessary for plant specifications to be revised. However any substitutions should be with a suitable alternative of comparable size to meet the schedule requirements, and should be approved by the Bloor Homes Landscape Design/Commercial Department.
All landscape implementation will be audited. Plant material not approved will be rejected and replaced at the Landscape Contractor's own expense, as stated in 1.2.
The site should be found in a condition as described in the Ground Workings' Trade Specification document which includes the removal of all builder's debris and the hardcore base set for scaffolding.

2 RETENTION OF EXISTING TREES AND HEDGEROWS
Precautions must be taken to ensure that trees and hedges shown for retention remain undisturbed with roots and branches protected with robust barriers in accordance with the most current BS 5837 Trees in Relation to Design, Demolition and Construction. Any tree surgery work should be in accordance with the most current BS 3998 Recommendation for Tree Work and must comply with any Conservation Area, Tree Preservation Orders or specific planning conditions where appropriate.
Reference must be made to Tree Protection Drawings.

3 PRE-PLANTING AND PRE-TURFING GROUND PREPARATION (Groundworking)

3.1 Subsoil Cultivation
Prior to any topsoiling all subsoil should be thoroughly 'rippled' to relieve compaction using suitable machinery, or by hand in confined areas or in proximity to existing tree trunks to a depth of 150mm.
3.2 Topsoiled Ground Topsoil
Wherever possible store and re-spread existing topsoil to POS areas to encourage re-generation of localised native species.
Topsoil, all topsoiling and soil storage operations are to be carried out in accordance with the current BS 3882 Specification for Topsoil. Topsoil spreading should be carried out to the depths shown below and all topsoiled areas should be cleared of all extraneous matter such as perennial weeds, plastic, wood, metal and stones greater than 50mm in any dimension which should be removed from site to a licensing facility.
Minimum depths of topsoil after firming and of subsoil cultivation to be achieved:
Type of Soft Landscaping
Topsoil Depth
Depth of subsoil to be broken up
Planted areas*
Grass Areas
Rear Gardens
* Remove extraneous matter within cultivated subsoil above 75mm in any dimension.

3.3 Levelling/Grading
In final grading operations finished soil levels adjacent to buildings are to be 150mm below damp proof course. For planted areas where 75mm depth bark mulch is specified the soil should be graded down towards adjacent paved or grass surfaces to 90mm below the paving or grass. This allows for full depth of bark mulch with 15mm clearance. For turfed areas final soil levels should be 10mm above the adjacent paving ready to receive the turf and for seeded areas at least 30mm above.

3.4 Weed Treatment
Only where necessary, because significant weed growth has started to establish, treat existing weeds with a non-residual based, herbicide and allow a suitable period as recommended by the manufacturer for this to take effect. Herbicide should be used strictly in accordance with the Pesticides Act 1999 (or otherwise updated/superseded legislation), according to manufacturer's instructions and only by qualified staff. Use products that are approved by the Soil Association.
Remove any small rounds of weed growth within shrub beds by hand at time of planting.

4 PLANTING
4.1 Ground Preparation
Planting shall not be carried out when the ground is waterlogged, frost-bound or during periods of cold drying winds.
All planting, seeding and turfing operations are to be in accordance with latest BS 4428 Code of Practice for General Landscape Operations.
A general purpose organic slow release fertilizer at the rate of 100g/m ² is to be incorporated into the top 150mm of soil during final cultivations.
4.2 Setting Out
Shrubs and hedges are to be set out as shown on the drawing at the specified densities and centres. The operatives carrying out the works should be able to interpret drawings, set out landscaping areas and communicate any discrepancies with our Site Manager.
Ornamental hedges are to be planted in a single row unless otherwise stated.
Trees are to be planted in the positions shown on the drawing ensuring that they are at the correct distances from adjacent buildings and 1.5m from drainage runs.
It is imperative that trees are planted with the correct species and location as specified in the drawings in accordance with the NHC Standards Chapter 4.2, or the LABC Standards, whichever is applicable.
It is the contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation to avoid damage to any underground services or cables.

4.3 Planting
Barc rooted and root balled stock to be planted between mid-November and end-February.
Planting pit sizes should be relative to the container size or root ball of the plant and shall be sufficiently large enough to accommodate the plants without root damage and to allow for backfill of topsoil and planting compost.
All ornamental hedgerow/ boundary plants are to be 'topped' cut to form a level hedge across each section of new hedging.
Plants are to be pit planted into the prepared soil incorporating peat free tree and shrub compost in quantities shown below, and firmed in.
Quantities of peat free tree and shrub planting compost:
2-3L Shrubs and Herbaceous 3 Litres
5-10L Shrubs 5 Litres
25L Specimens 10 Litres
Trees 20 Litres plus 100g/m ² organic slow release fertilizer and 150ml mycorrhizal dressing such as 'Rootgrow'
All trees and shrubs are to be watered thoroughly, to full ground capacity, immediately after planting and before the application of mulch. The landscape contractor shall allow for provision of all equipment to complete this initial watering, using water supply point as directed on site.
4.4 Tree Planting
Tree planting operations should be in accordance with part 10 of the current BS 8545 Trees from Nursery to Independence in the Landscape.
Tree pits are to be excavated to a minimum of 1m X 1m X 600mm with the sides well scarified to prevent smearing. The base of tree pits are to remain undisturbed and should only be broken up if there is a drainage problem and/or soil pan. If conditions make drainage necessary this should be provided away from the tree, with the base of the pit sloped to direct water into a drainage pipe.
Backfill of tree pits should be in layers of 150mm at a time starting with subsoil followed by layers of topsoil with compost etc. as shown above.
Root free of the newly planted tree should be clearly visible at the soil surface. It should not be buried by excess soil or by mulch.
Ensure trees in hard surfaces and in restricted areas are planted in accordance with the appropriate tree planting detail with sufficient volume of tree soil.
All trees are to be watered thoroughly, immediately after planting. The landscape contractor shall allow for provision of all equipment to complete this initial watering, using water supply point as directed on site.
Each tree is to receive at least 30 gallons when watered.
4.5 Tree Support
All trees up to and including selected standards are to be supported with single 75mm diameter stake.
Heavy Standard Trees shall be double staked with 100mm diameter stakes and a half-round timber cross-brace fitted to the windward side of the tree within 25mm of the top of the stakes ensuring the tree is vertical and straight.
Stakes are to be securely driven into the ground prior to planting to a height above ground that is one third of the height above ground of the tree when planted to allow free movement of the crown.
Secure street trees to cross-brace with an adjustable plastic / rubber tie with spacer and buckle (buckle end to be nailed to stake).
Secure POS trees with a bio-degradable plastic tie, wrapping the material round itself to form a spacer and nailing it to the stake or cross-brace.
Each tree should be fitted with a tree irrigation system unit fitted in accordance with the details. Refer to specific tree planting details.
Linear root barriers where required should be installed as near to the surface or service route to be protected as possible to provide as much rooting area for the trees as possible. Ensure that there are no sharp objects close to either side of the barrier and that the top edge of the root barrier remains 10mm above the surface on the tree side with no growing medium over the top of the barrier. Overlapping ends should be joined by tapping both sides with jointing bar.

4.6 Mulch
All trees and shrubs are to be watered thoroughly, to full ground capacity, immediately after planting and before the application of mulch. The landscape contractor shall allow for provision of all equipment to complete this initial watering, using water supply point as directed on site.
Ensure the area to be mulched is entirely free from annual and perennial weeds and has been watered prior to applying an even spread of mulch to planting areas to control weeds and retain moisture.
Unless instructed otherwise apply good quality bark mulch to a depth of 75mm to planting beds, hedgerows and tree stations.
Where stone mulch is requested by the regional office apply 40mm of stone over Planter Geotextile membrane or equivalent pegging down with metal pegs.
Finished soil levels adjacent to buildings are to be 150mm below damp proof course. For planted areas where 75mm depth bark mulch is specified the soil should be graded down to adjacent paved or grass surfaces to 90mm below the paving or grass. This allows for full depth of bark mulch with 15mm clearance.
Where 40mm depth stone mulch is specified with geo-textile membrane grade to 55mm below paving or grass within 500mm.
Finished mulch levels should be no higher than 15mm below adjacent pavement or grass levels to avoid any spillages.
5 GRASS
5.1 Turf Preparation
The area to be turfed shall be cultivated to a minimum depth of 150mm removing all weeds, debris and stones over 25mm diameter which should be placed in waste skips provided or as directed by the site manager. The surface shall be raked to smooth flowing contours with a fine tith, incorporating pre-turfing fertiliser at 50 g/m ² .
5.2 Delivery and Storage
Turf shall be supplied in accordance with the most current BS 3969 Recommendations for Turf for General Purposes.
Turf shall be cultivated high grade turf well rooted seeded turf free from stones, weeds and coarse grasses. It shall be close textured, green in colour and be sufficiently fibrous to withstand handling. Turf rolls shall be regular in shape, 300mm wide and of uniform thickness (minimum 25mm). The grass shall be closely mown and shall not exceed 25mm in height.
Turf shall be stacked in piles of up to 1 metre. It shall not be laid in frosty or waterlogged conditions and shall not be stacked in rolls for more than three days. Any turf deemed to be substandard shall be replaced at the landscape sub-contractors cost.
5.3 Turf
Turfing operations shall be in accordance with the most current BS 4428.
Turf should be laid when weather conditions are suitable and not during exceptionally frosty or dry weather conditions.
Turf is to be laid with staggered joints, well buttet together, and in firm contact with the soil working from plants positioned on turves already laid. At no time should freshly laid turf be walked on without the use of boards.
The turf shall be watered immediately on completion. The landscape contractor shall allow for provision of all equipment to complete this initial watering, using water supply point as directed on site.
Any unevenness shall be made good by lifting the turf and adjusting the levels. Should shrinkage occur, fine topsoil shall be brushed into the joints.
Where trees are planted in turfed areas a 750mm diameter circle around each tree is to be kept clear of turf.
5.4 Seeding Preparation
The area to be seeded shall be cultivated to a minimum depth of 150mm removing all weeds, debris and stones over 25mm diameter which should be placed in waste skips or as directed by the site manager. The surface shall be raked to smooth flowing contours with a fine tith, incorporating pre-seeding fertiliser at 50 g/m ² unless otherwise stated and work into top 20mm during final cultivation.
5.5 Seeding
All Grass seed shall be sown in March / April or September during calm weather conditions and not when the ground is frost bound or waterlogged. Seed shall be sown in two equal sowings in traverse directions at 35g/m ² total unless otherwise stated. After sowing the contractor shall lightly rake the seed into intimate contact with the soil.
5.6 Wildflower Seeding
All wildflower seed mixes are to be from a certified source with local provenance seed stock. Ground preparation to be as supplier's specification/ guidance. Sowing applications may vary but are likely to be carried out in early spring or late autumn.

6 MAINTENANCE
The landscape contractor shall maintain all none private landscape areas for a period of 12 months following practical completion to ensure successful establishment. All stock deemed to be dead, dying or diseased within the 12 months defects period shall be replaced by the contractor at own cost.
The contractor should factor in 12 months of repeat visits, sufficient for the establishment and aftercare of all planting. None private areas can be identified for each site.
Private plot landscaping will be handed over to the householders as and when each house is occupied, the site will be responsible for watering until handover.
6.1 Weed Clearance
All planting areas are to be kept weed free by hand weeding unless otherwise specified. Providing adequate mulch, as specified, should aid this. Mulch should also be topped up as required.
6.2 Litter Clearance
All areas are to be kept litter free.
6.3 Watering
Watering to planted areas is to be undertaken as necessary to ensure plants become established.
All trees and shrubs are to be watered thoroughly, to full ground capacity, immediately after planting and before the application of mulch. The landscape contractor shall allow for provision of all equipment to complete this initial watering, using water supply point as directed on site.
Each tree is to receive at least 30 gallons when watered.
During maintenance visits, watering should take place as required. Watering visits should be factored in within the 12 months defects period, especially during times of prolonged dry weather.
6.4 Checking Ties
All tree ties and stakes are to be checked, adjusted (if too loose, too tight or if chaffing is occurring) and replaced if damaged or missing. Any broken stakes are to be replaced.
6.5 Formative Pruning
Any damaged shoots/branches are to be pruned back to healthy wood. Plants are to be pruned in accordance with good horticultural practice to maintain healthy well-shaped specimens. Shrubs grown for their coloured stems, such as Cornus, are to be cut back each spring to encourage new growth.
All hedges are to be clipped to help form hedge to dimensions on drawings/ Management Report. Cut back off pavement & kept to a maximum height of 1.2m unless specified otherwise.
6.6 Turfed and Seeded Areas
When newly turfed & seeded areas reach 50mm they should be lightly rolled and kept to a height of 40mm. All arising's shall be removed. Any bare patches shall be made good at this time. Lawn areas should then be cut at appropriate intervals during the growing season to maintain a 40mm high sward. Watering, weeding and repair of all erosion and settlement with re-seeding or turfing shall be undertaken as required to establish a uniform and healthy stand of grass.

PLANTING SCHEDULE

- All areas

PROPOSED TREES - Heritage Apple Trees available from www.suttonelms.org.uk
Number
3 - APPANE Apple 'Arnie Elizabeth'
3 - APPJLS Apple 'Dumelow's Seedling'
2 - APPLTN Apple 'Lanton's Nonesuch'
2 - APPNKM Apple 'Marigold Maker'
2 - APPQUC Apple 'Queen Caroline'
Total -11-
PROPOSED TREES - Heavy Standard
Number
3 - ACECAM Acer campestre
3 - ACECANST Acer campestre 'Streetwise'
3 - ALNGL Alnus glutinosa
3 - BETPFI Betula pendula
2 - CRAMON Crataegus monogyna
7 - MALSYLB Malus sylvestris
1 - MORNI Morus nigra
6 - PRUAV Prunus avium
3 - PRUPAD Prunus padus
1 - PYRCACH Prunus callellyana 'Chanticleer'
2 - QUERO Quercus robur
4 - SALCAP Salix caprea
2 - SORAU Sorbus aucuparia
1 - SORTO Sorbus torminalis
Total -53-

PROPOSED TREES - Selected Standard
Number
1 - ACGLQA Acer platanoides 'Globosum'
8 - PRUSNG Prunus 'Snow Goose'
Total -10-

PROPOSED TREES - Standard
Number
2 - AMEBA Amelanchier 'Ballerina'
155 - ESCAB Escallonia 'Apple Blossom'
3 - MALEV Malus 'Evereste'
1 - MALCOH Malus 'Colonial Hornet'
13 - MALBASP Malus baccata 'Street Parade'
6 - PRUAM Prunus 'Amanogawa'
1 - PRUCPI Prunus callellyana 'Pisardii'
1 - PRUSST Prunus serotina 'tibetica'
1 - SORAU Sorbus aucuparia 'Streetwise'
Total -39-

CONIFERS
Number
6 - PINSY Pinus sylvestris 150-175cm
Total -6-

ORNAMENTAL HEDGE
Number
259 - ELAEB Eleaagnus x ebbingei
155 - ESCAB Escallonia 'Apple Blossom'
351 - ESCRH Escallonia 'Red Hedger'
285 - GRILI Grevillea littoralis
51 - ILFAO Ilex aquifolium
76 - LAVAN Lavandula angustifolia
78 - LONNMG Lonicera nitida 'Meigripi'
340 - PHOFRRR Photinia x fraseri 'Red Robin'
334 - PRULU Prunus lusitana
Total -1929-

GROUND COVER SHRUBS AND PERENNIAL PLANTS - Shrubs
Number
58 - ABEGJA Abutilon x grandiflora
95 - AUCJAR Aucuba japonica 'Rozannie'
38 - BERDA Berberis darwinii
30 - BERTHA Berberis thunbergii 'Atropurpurea'
87 - BRASU Brachyglottis 'Sunshine'
31 - CHOAP Choisya 'Aztec Pearl'
38 - CHOTES Choisya ternata 'Sundance'
42 - CISCO Cistus x corbariensis
12 - ELAEBU Eleaagnus x ebbingei 'LimeLight'
57 - EUOFDOB Eucyrtus fortunei 'Dart's Blanke'
141 - EUOPFOR Eucyrtus fortunei 'Emerald 17 Gold'
101 - EUOPOEG Eucyrtus fortunei 'Emerald Gaiety'
55 - GENLY Genista lydia
26 - HEBGO Hebe 'Great Orme'
82 - HEBMAR Hebe 'Marjorie'
65 - HEBMW Hebe 'Mrs Winder'
32 - HEBPS Hebe pinguifolia 'Sutherlandii'
14 - HEBRA Hebe rakaiensis
168 - HYPHI Hypericum 'Hidcote'
55 - HYPCA Hypericum calycinum
52 - LAVANHIL Lavandula angustifolia 'Hidcote'
43 - LONNIBG Lonicera nitida 'Baggesen's Gold'
55 - LONNIBL Lonicera nitida 'Lentini Beauty'
36 - LONNIMG Lonicera nitida 'Meigripi'
73 - LONPI Lonicera pileata
15 - MAHAQ Mahonia aquifolium
24 - OLEHA Olea x hasasi
12 - OSMBU Osmanthus x burkwoodii
18 - PHIMPH Philadelphus 'Mantau d'Hermine'
44 - PHOFRLRR Photinia x fraseri 'Lillie Red Robin'
37 - PRULAOL Prunus laurocerasus 'Otto Luyken'
55 - PRULAZA Prunus laurocerasus 'Zabelland'
30 - ROSGLA Rosa glauca
43 - SARCO Sarcococca confusa
42 - SKUJARU Skimmia japonica 'Rubella'
12 - SPUIAGO Spiraea japonica 'Goldflame'
55 - STEINCR Stephanandra incisa 'Crispa'
135 - VIBDA Viburnum davidii
Total -2032-


GROUND COVER SHRUBS AND PERENNIAL PLANTS - Herbaceous
Number
32 - BERSI Bergenia 'Silverlicht'
50 - GERMA Geranium macrorrhizum
Total -82-

BULBS
Number
1579 - GALNI Galanthus nivalis
1579 - NARPS Narcissus pseudonarcissus
Total -3158-

SENSORY MIX - Individual species to be planted together in groups of 3-7
Number
78 - BRASU Brachyglottis 'Sunshine'
78 - CARCLHB Caryopteris x clandonensis 'Heavenly Blue'
78 - DEUHYMR Delutzia x hybrida 'Mont Rose'
78 - OLEHA Olea x hasasi
78 - PERBS Perovskia 'Blue Spire'
77 - ROSOF Rosmarinus officinalis
Total -487-

PROPOSED TREE PLANTING DETAIL

- Selected Standard/Standard Street Trees

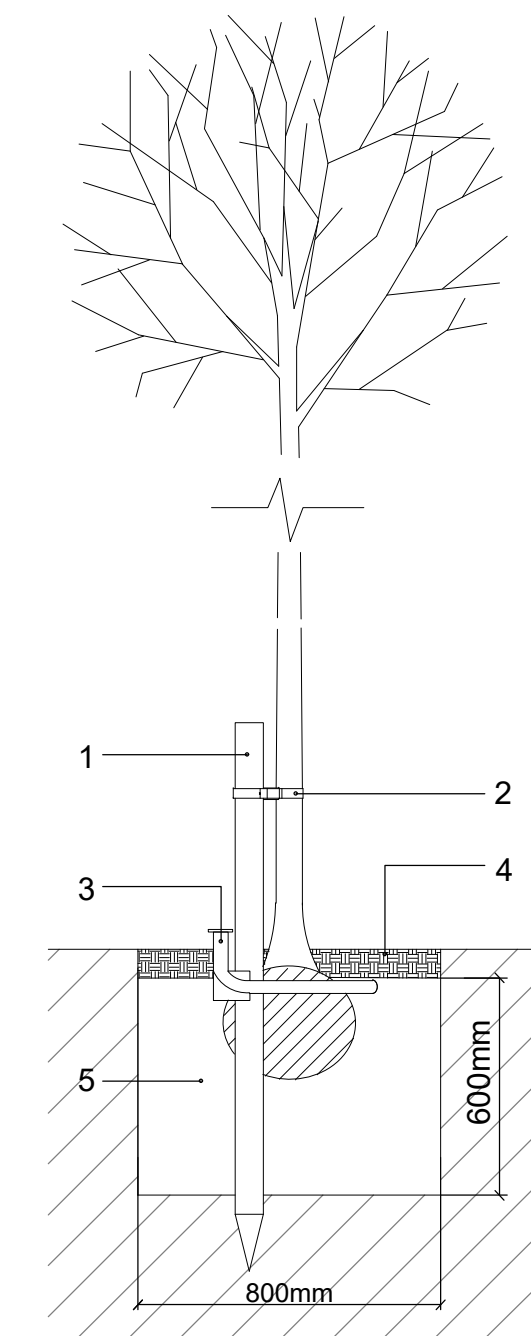


1. Timber Tree Stake 75mm Ø x 1.8m long (tanalised)
2. Adjustable plate / rubber tie with spacer and buckle (buckle end to be nailed to stake) *
3. Irrigation system. Nail to stake with 50mm galvanised nail. Ensure filler cap finished slightly about mulch level
4. Mulch layer - 75mm Ornamental Bark Nuggets 15-65mm
5. Topsoil, compost and fertiliser. Base of tree pit to remain undisturbed, sides scarified
- * NOTE: Secure at a height no more than 1 of the total height of the tree above ground when planted

NOTE: Where trees are within 5m of roads and services and within 3m of footpaths linear root barrier with root deflecting ribs, is to be installed in accordance with manufacturers instructions. Barrier is to be adjacent to the surface or service route to provide maximum rooting area.


PROPOSED PLOT PLANTING DETAIL

- Shrubs/Herbaceous/Grasses

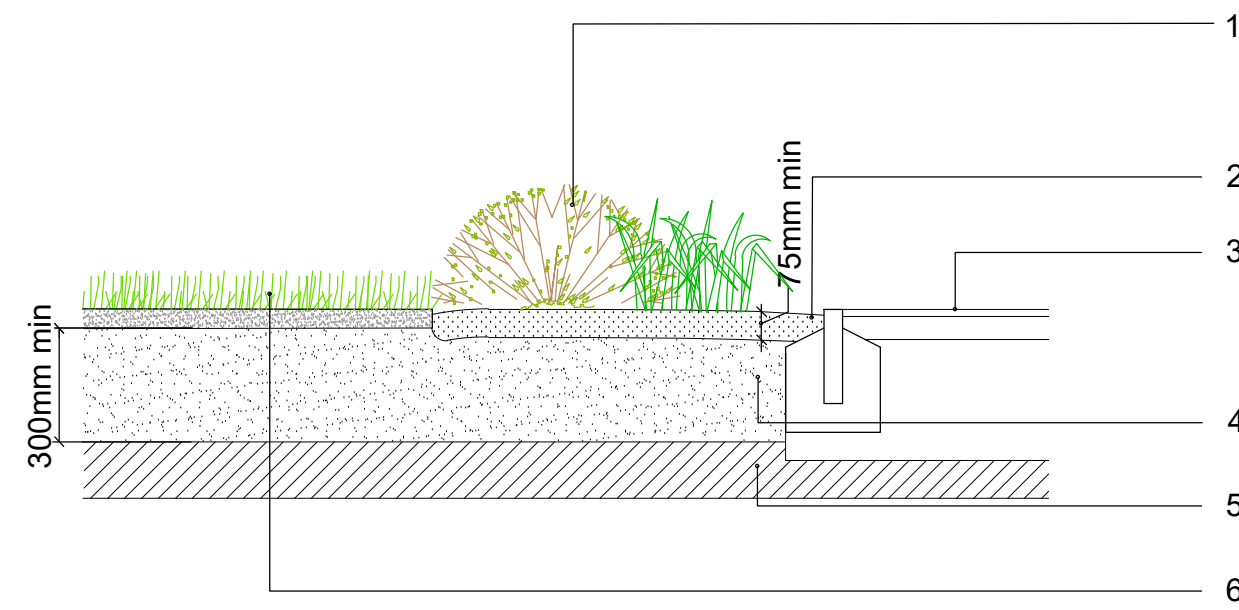

PROPOSED TREE PLANTING DETAIL


- Heavy Standard POS Trees

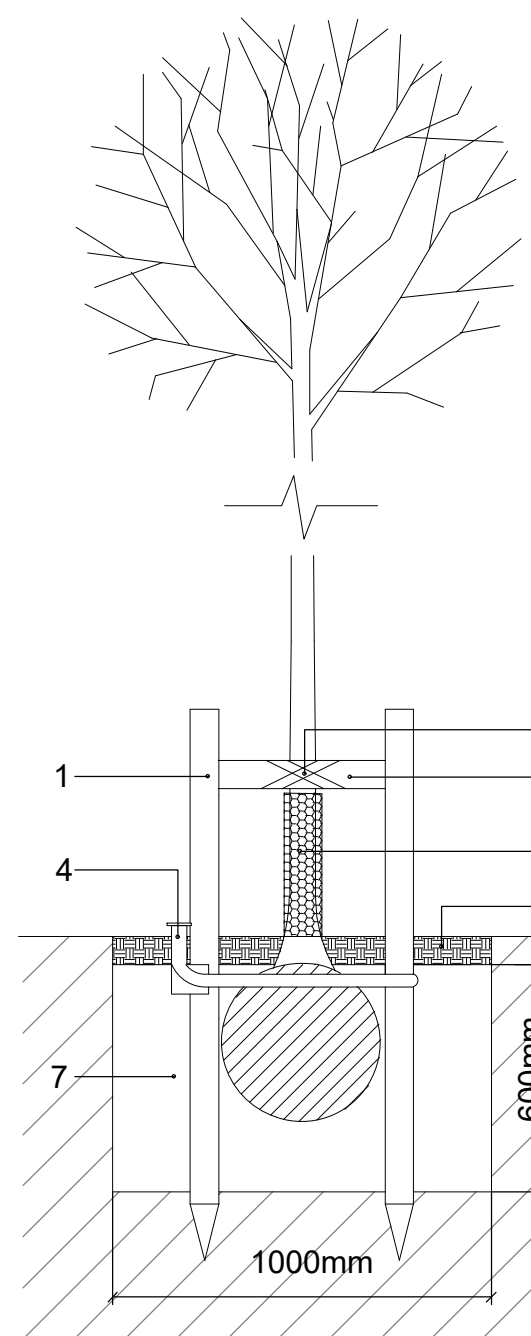

1. 2x Timber tree stake - 1000 x 1.8m long (tanalised)
2. Hessian Tree Tie
3. FSC Timber cross brace *
4. Irrigation System - nail to stake with 50mm galvanised nails. Ensure filler cap finishes slightly above mulch level
5. Rabbit Mesh Guard 600 mm height
6. Mulch layer - 75mm Ornamental Bark Mulch 8-35mm
7. Topsoil, compost and fertiliser. Base of tree pit to remain undisturbed, sides scarified
- * NOTE: Secure at a height no more than 1 of the total height of the tree above ground when planted

PROPOSED TREE PLANTING DETAIL

- POS Heritage Apple Trees

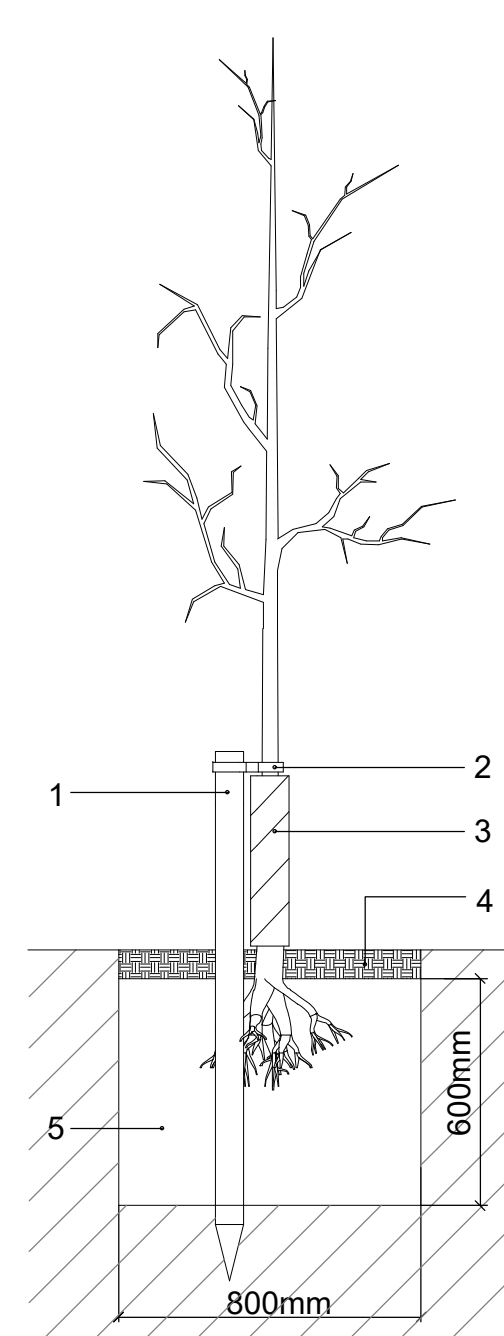

1. Timber Tree Stake 75mm Ø x 1.8m long (tanalised)
2. Hessian Tree Tie
3. Rabbit Guard - 450x38mm
4. Mulch layer - 75mm Ornamental Bark Mulch 8-35mm
5. Topsoil, compost and fertiliser. Base of tree pit to remain undisturbed, sides scarified
- * NOTE: Secure at a height no more than 1 of the total height of the tree above ground when planted

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH SEPERATE GROUP 1 SITE SPECIFIC CONSTRUCTION NOTES AND MATERIALS SPECIFICATION.

THIS SCHEDULE & THESE SPECIFICATIONS APPLY TO LANDSCAPING SHOWN ON DRAWINGS EMxxx-LS-001 to EMxxx-LS-004

Revision	Date
a Landscaping updated to the latest layout.	17/09/21
b Landscaping updated to the latest layout.	26/09/21
Job:	Normandy Fields, Hincley Ph 7
Title:	Site Landscaping Specification & Schedule
Scale:	NOT TO SCALE, PRINT @A0 Drawn: JMS
Date:	Sept 2021 Checked: PmJ

THIS DRAWING AND THE BUILDING WORKS DEFINED ARE THE COPYRIGHT OF J S BLOOR (SERVICES) LIMITED AND MAY NOT BE REPRODUCED OR AMENDED EXCEPT BY WRITTEN PERMISSION. NO LIABILITY WILL BE ACCEPTED FOR AMENDMENTS MADE BY OTHER PERSONS


BLOOR HOMES
J S BLOOR (SERVICES) LIMITED ASHBY ROAD, MEASHAM, SWADINCOATE, DERBYSHIRE DE12 1JP TELEPHONE 01530 270100 FACSIMILE 01530 272006
Drawing No: EMxxx-LS-005b

NORMANDY FIELDS, HINCLEY PH 7

APPENDIX 5

Phase 3 Landscape Proposals

NORMANDY FIELDS, HINCKLEY PH 3

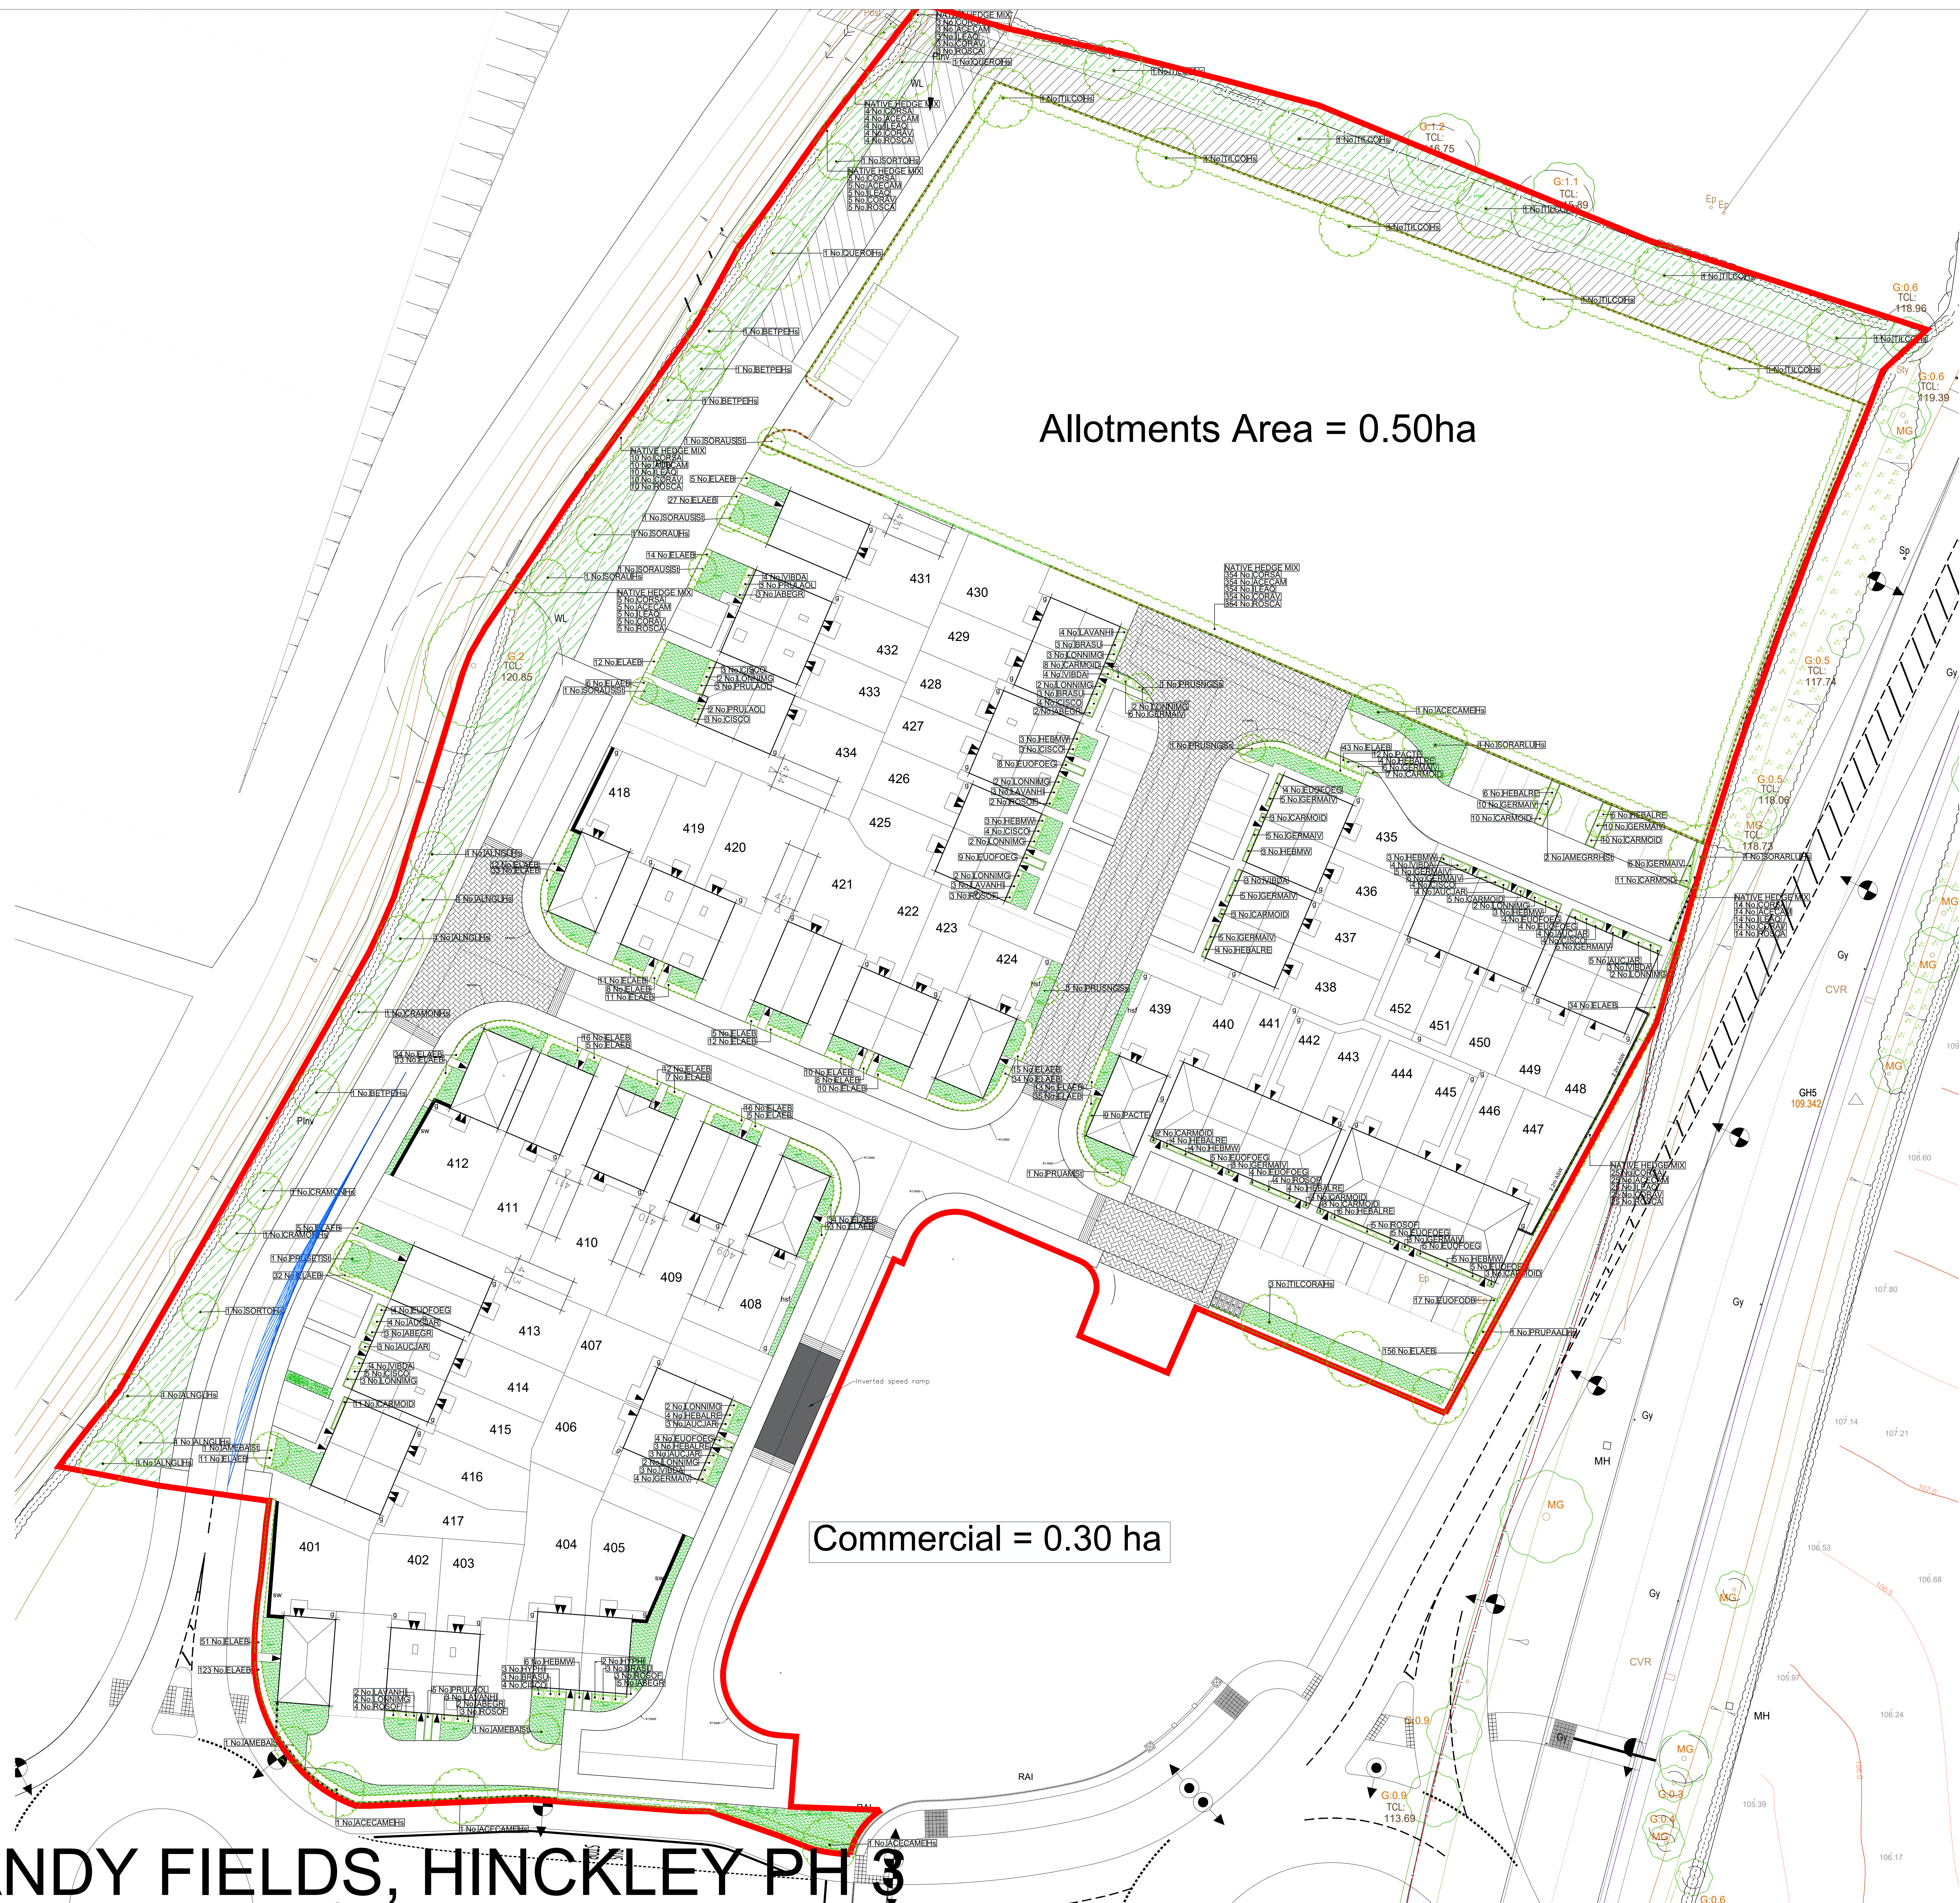

Allotments Area = 0.50ha

Commercial = 0.30 ha

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH SEPARATE GROUP 1 SITE SPECIFIC CONSTRUCTION NOTES AND MATERIALS SPECIFICATION.


DRAWING NOTES
All tree and shrub locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out in Chapter 4 of the NHBC Standards.
The landscape Contractor must ensure that plant material is planted in the locations shown and with NO SUBSTITUTIONS made without consulting the Group Landscape Design Department. It is the Landscape Contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation so that no services are damaged or compromised by tree planting. Any changes to tree positions, species or specifications must be approved by the Group Landscape Design Department. Underground service strips are to be kept free of all plant material.
Contractors must comply with all Health and Safety regulations and be aware of project/site specific information including referring to the information set out in the CDM drawings.

- LEGEND**
- EXISTING TREES AND HEDGES
To be retained
 - PROPOSED TREES
Heavy/Selected/Standard
See Schedule
 - ORNAMENTAL HEDGE
See Schedule
 - NATIVE HEDGE
See Schedule
 - PROPOSED PLANTING
Shrubs/Herbaceous/Grasses
See Schedule
 - TURF
with area (m²)
 - WILDFLOWER MEADOW
Special General Purpose Meadow
Mixture
Emorgate EM3 sown at 4 g/m²
 - TIMBER POST AND RAIL FENCE
1.2m high
To Regional Specification

CDM LEGEND

Symbol	Brief description of risk.
	Caution overhead / underground services
	Sewer assessment
	Trees have protection order in place, guarding required

NOTES:
Principal contractor to ensure all health and safety procedures are being correctly followed in relation to all temporary works.

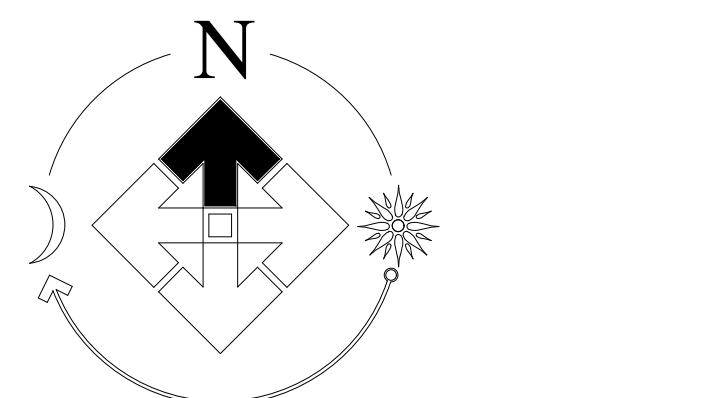

PLOT NUMBER
SHEET REF.
Plots 401-453

FOR SPECIFICATION,
PLANTING DETAILS &
SCHEDULE SEE DRAWING
EM100-LS-007

Revision	Date
a	02/11/21
b	30/11/21
c	17/01/22
d	27/01/22


Job:	NORMANDY FIELDS, HINCKLEY PH 3
Title:	Site Landscaping
Scale:	1:250 @A0
Date:	Oct 2021
Drawn:	ED
Checked:	PmJ

THIS DRAWING AND THE BUILDING WORKS DETAILING ARE THE COPYRIGHT OF J.B. BLOOR (SERVICES) LIMITED AND MAY NOT BE REPRODUCED OR AMENDED EXCEPT BY WRITTEN PERMISSION. NO LIABILITY WILL BE ACCEPTED FOR AMENDMENTS MADE BY OTHER PERSONS.

BLOOR HOMES
J.B. BLOOR (SERVICES) LIMITED
ASHBY ROAD, MEASHAM, SWADLINCOTE,
DERBYSHIRE DE12 7JP
TELEPHONE 01530 270100 FACSIMILE 01530 272006

Drawing No.
EM100-LS-006d

SHEET LAYOUT
LOCATION PLAN
NOT TO SCALE

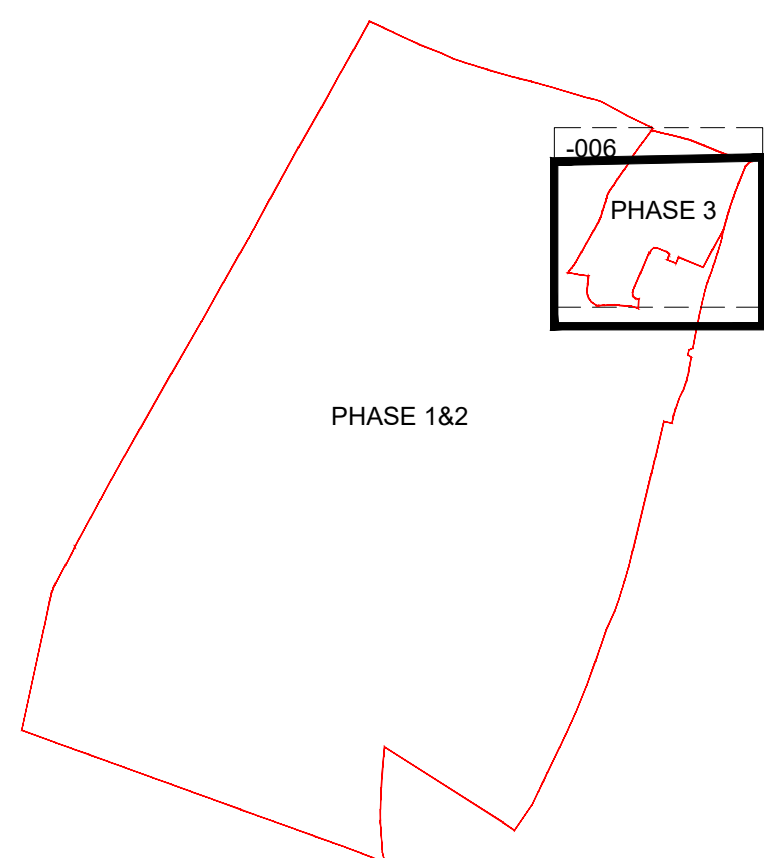



ECOLOGYSOLUTIONS

Part of the ES Group

Ecology Solutions Limited | Farncombe House | Farncombe Estate | Broadway | Worcestershire | WR12 7LJ

01451 870767 | info@ecologysolutions.co.uk | www.ecologysolutions.co.uk