

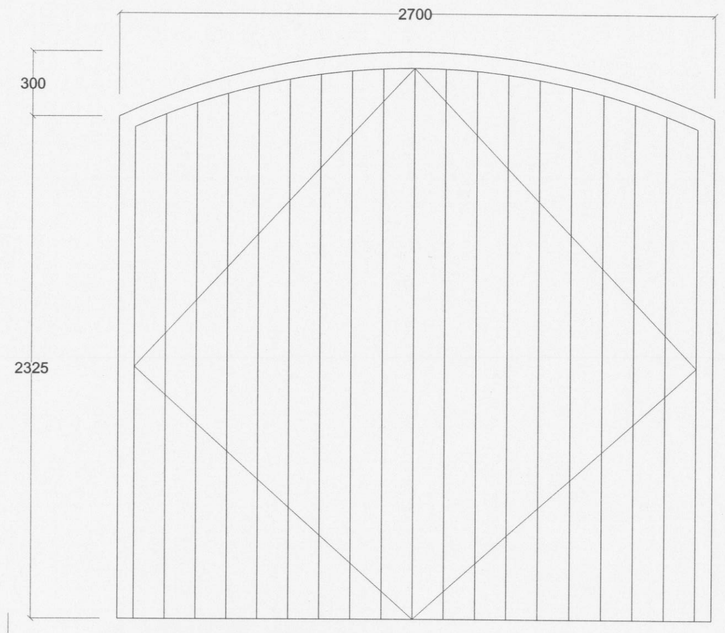



DOOR D1 MAIN ENTRANCE
DOOR ELEVATIONS 1:20

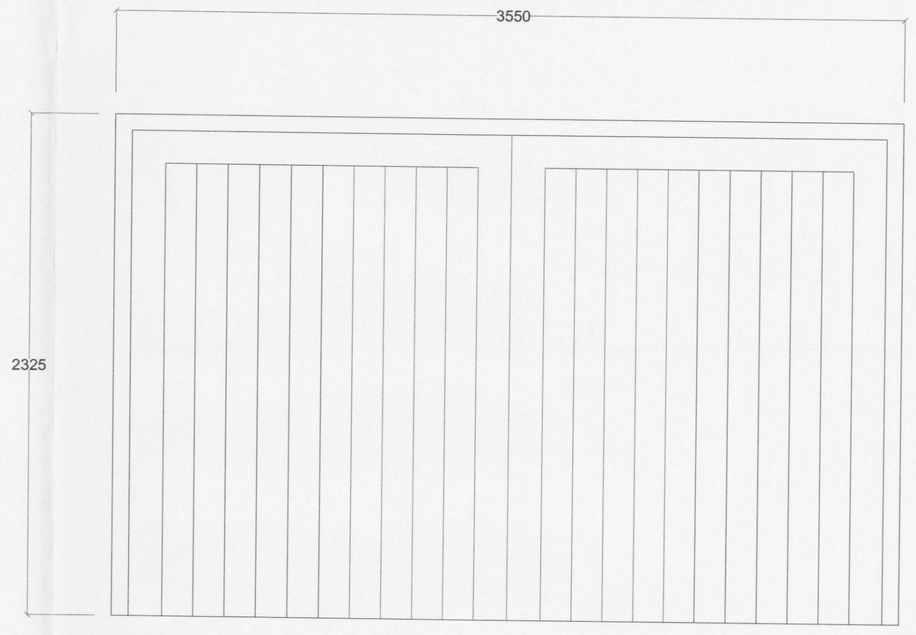


DOORS D2 & D3 FALSE DOORS

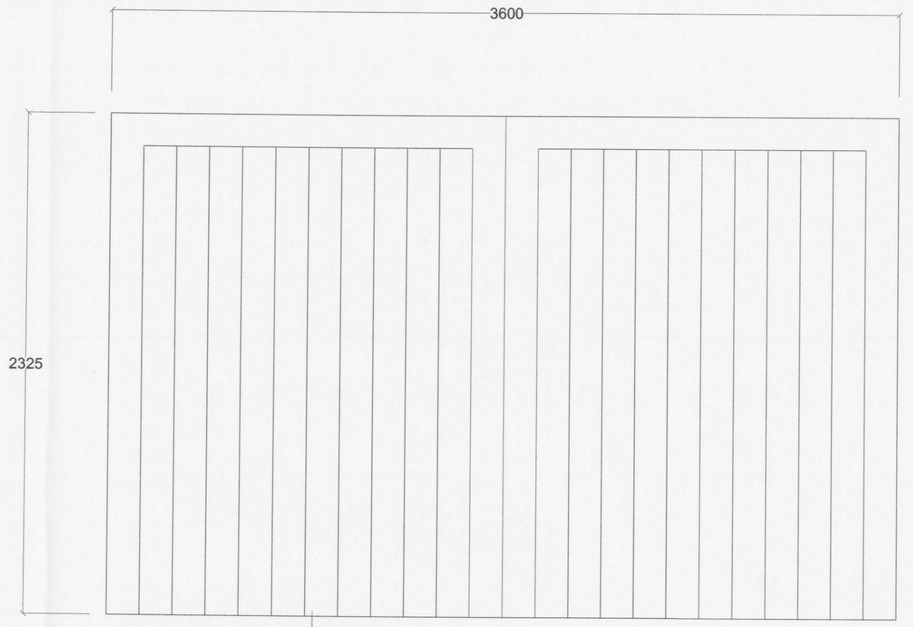


DOOR D4 REAR ENTRANCE

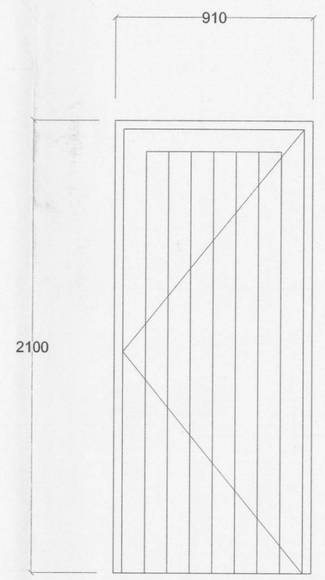


DOOR D5
PERSONNEL ENTRANCE

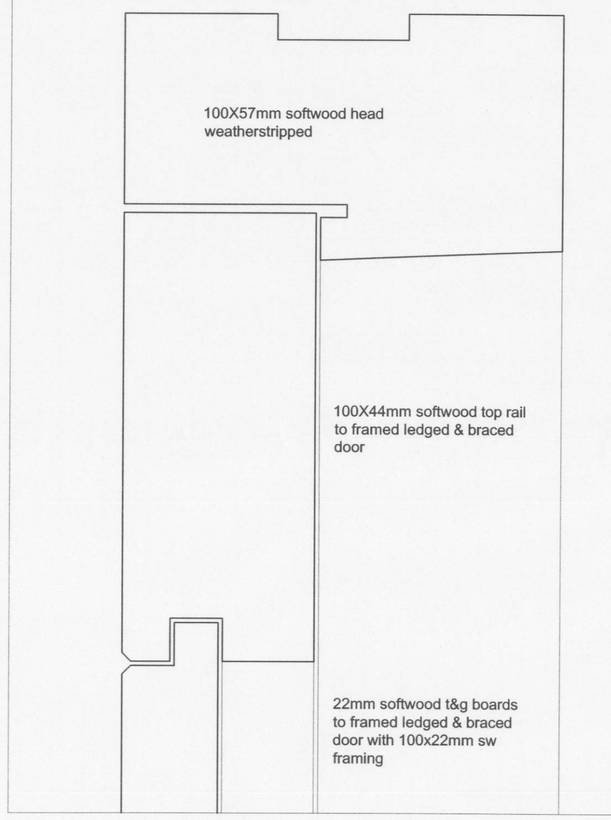

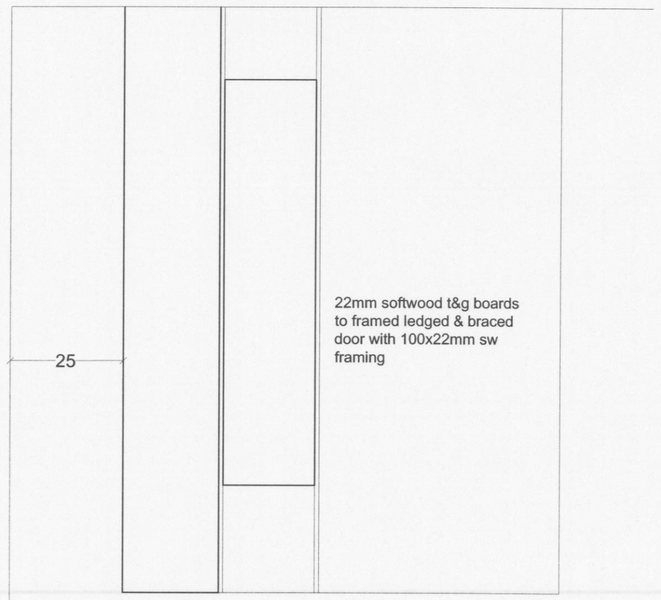

VERTICAL SECTION THROUGH DOOR D5
1:1 JOINERY DETAILS

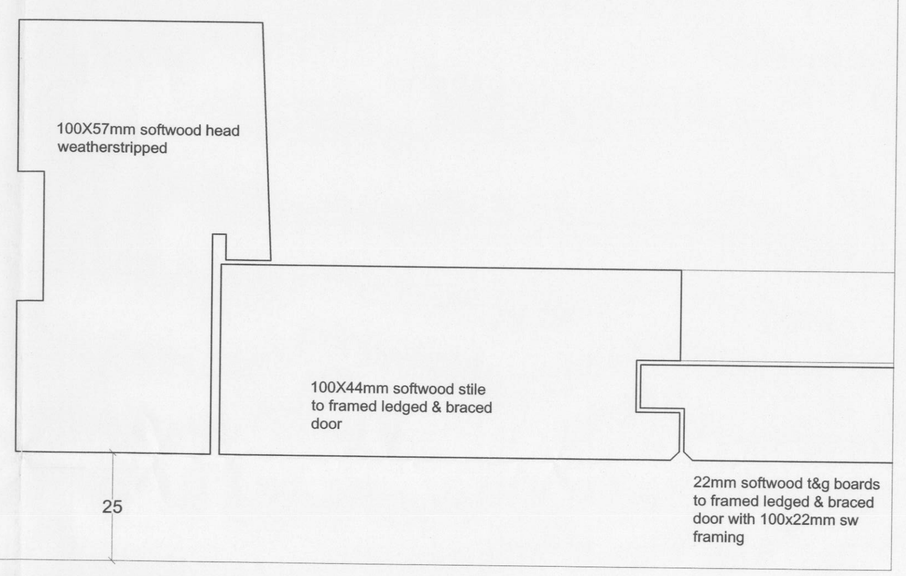


JAMB DETAIL - D5


100X44mm softwood framed ledged & braced door with 22mm vertical V jointed t&g boarding on 22mm softwood framing, inset to 100x57mm weatherstripped softwood frame.


Door and frame stained minimum two coats water based stain, Mid-Oak, with one coat satin finish yacht varnish.

Allow for clear polysulphide mastic sealant at junction of frame with masonry.

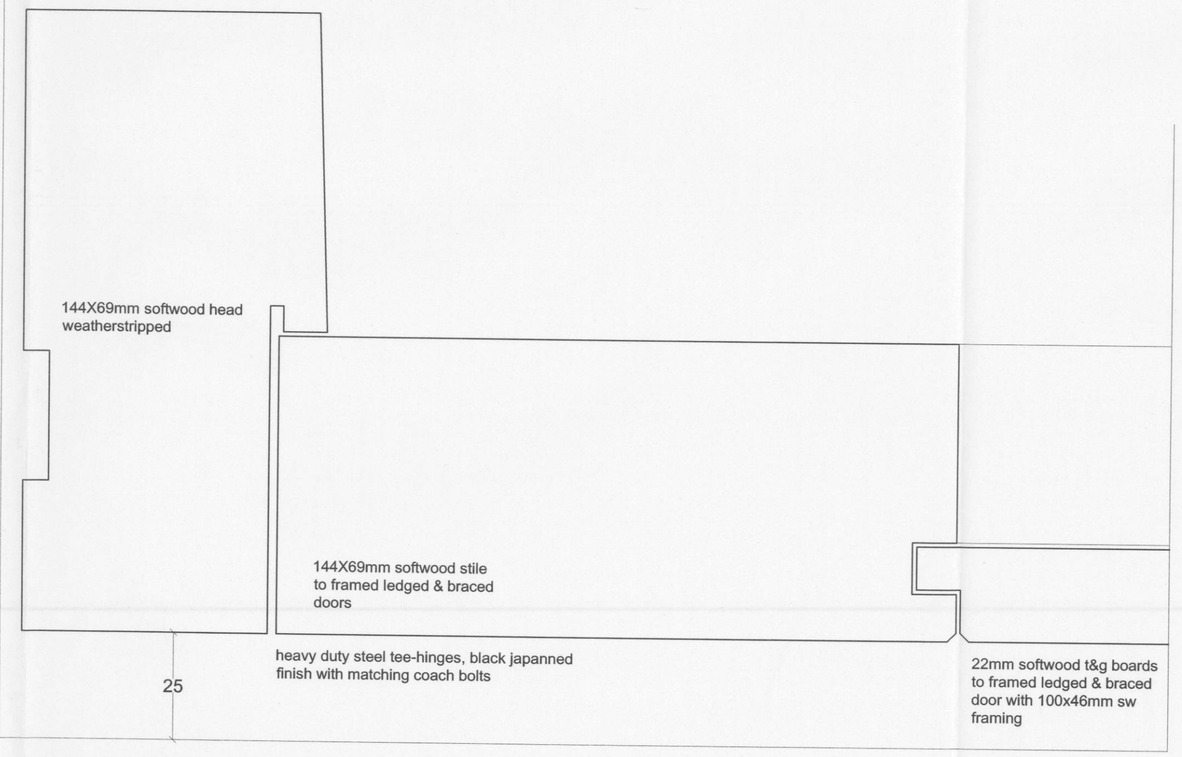

JAMB DETAIL - DOORS D1 - D4

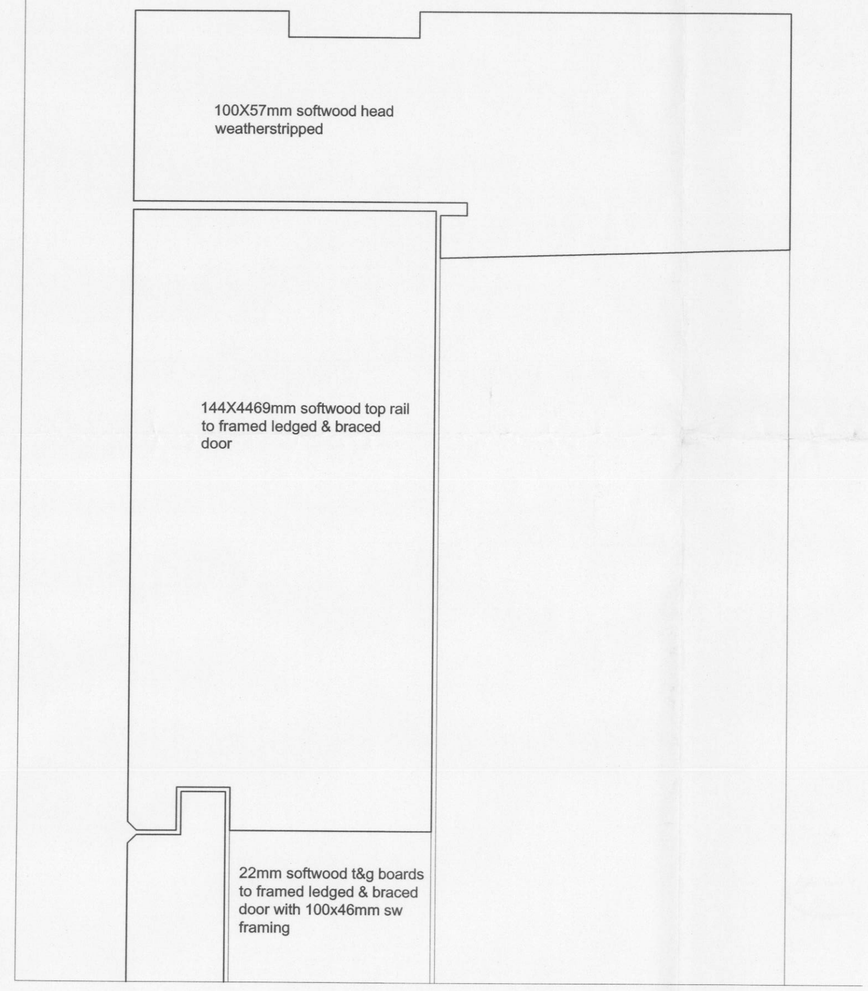

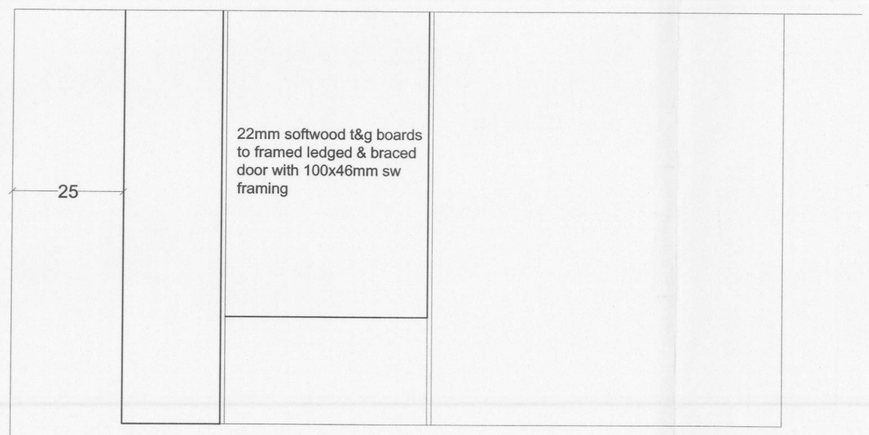

VERTICAL SECTION THROUGH DOORS D1 - D4
1:1 JOINERY DETAILS

The Builder is to check and verify all buildings and site dimensions, levels and sewer invert levels prior to commencement of work.

Do not scale off this drawing, work to figured dimensions only.

This drawing must be read and checked with all structural and relevant specialist drawings.

The Builder is to comply in all respects with the current Building Regulations and latest Codes of Practice.

JOB No. 7065.05

revisions

No.	Description	Date

SIBSON MILL PROPERTIES

RITCHIE & RITCHIE LLP
Architecture & Design
THE MANOR HOUSE, LICHFIELD STREET, TAMWORTH
STAFFORDSHIRE, B79 7QF TEL | 01827 62251 FAX | 01827 310513
EMAIL | Ian@RandRarchitects.co.uk

Proposed joinery details

SCALE	DATE	DRAWN	JOB No.
1:1 1:20	Oct 11	IAP	7065.05

copyright of this drawing and of work executed from it remain the property of Ritchie & Ritchie Architects LLP