

Pre-development Tree Survey BS5837:2012

Chapel Lane

Wetherley



July 2021, rev October 2021

Report Author:

Dr. Stefan Bodnar BSc (Hons) PhD MIEEM

Wallbrook Farm

Allensmore

HR2 9Be

Tel: [REDACTED]

Email: [REDACTED]

Contents

1. Introduction and site description	3
2. Arboricultural Survey Method	6
2.1 Condition Status	7
2.2 Root Protection Area	9
3. Results	10
4. Discussion	15
4.1 Tree protection	15
4.2 Tree protection & ground protection	17
4.3 Landscape considerations	20
4.4 Mitigation and compensation	21

Appendix 1: Site and tree images

Appendix 2: Tree location map

1.0. Introduction and Site Description

The client, Cartwright Homes Ltd., commissioned Dr. Stefan Bodnar to undertake an arboricultural survey (BS5837: 2012) on trees within a proposed development site at Chapel lane, Witherley, CV9 3LP.

The trees included within the survey and their relationship to the Development Footprint are identified on the drawing in Appendix 2, the aerial photograph relating to the site and photographs of trees involved are included in Appendix 1, together with examples of the trees concerned.

BS 5837:2012 includes an assessment of all trees within the development footprint in addition to those near to the site boundary. The site assessed is indicated in the location plan of trees (Appendix 2). See site plan below in Figure 1.

The site consists of an agricultural field with some trees and scrub within the site and native hedges with in hedge trees around the edges of the site. See satellite image (figure 2) and appendixes below.

It is understood that none of the trees are protected by a Tree Preservation Order, though it is recommended that the client fully satisfy themselves that this is the case during contact with the Local Planning Authority.

Figure 1. Site location plan



See blue are below including are under ownership of client:



Figure 1a. Site topographical plan

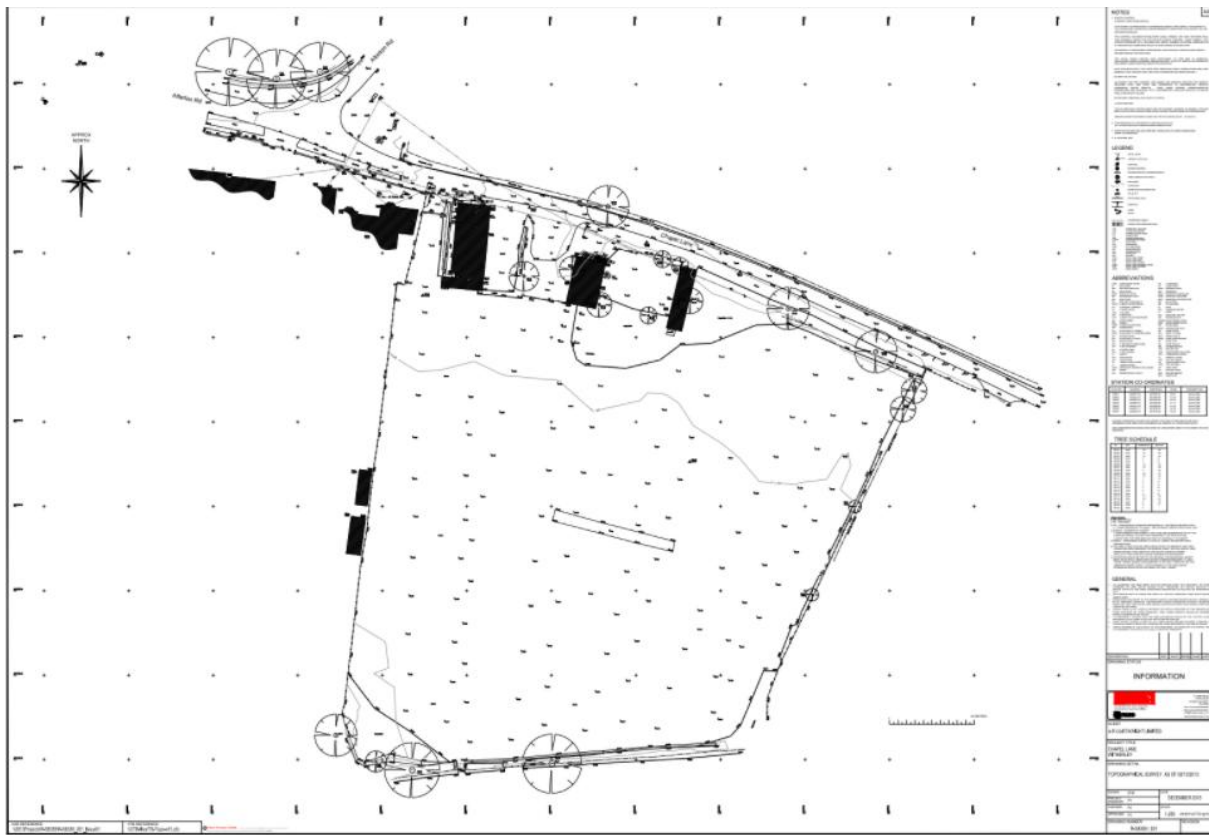


Figure 2. Satellite image of site



Map data 2021 © Google.

Proposed development:



2.0. Arboricultural Survey Methodology

2.1 Condition Status

To determine the status of the trees within the site a full arboricultural survey has been undertaken, assessing species and status of all trees present within the footprint of development. The survey has been carried out in accordance with BS 5837 (2012).

The surveyor has extensive experience of arboriculture, through undertaking BS5837 surveys on many sites between 2005 and 2021. Previous to this, he has undertaken Lantra approved courses for arborists, and is competent to the level of a tree officer operating within a Local Authority, being familiar and having used the systems undertaken by tree officers for undertaking safety and condition surveys for Birmingham City Council. Dr. Bodnar possesses numerous ecological qualifications including a full member of CIEEM and a PhD (Community Forestry, 1998). Recent Certificated BS5837 training (May 2015) from Tree Life Arboricultural Consultancy Ltd.

Individual trees above 75mm (diameter at 1.5m above ground level) have had their position confirmed on the survey drawing. The trees were visually assessed and a schedule prepared listing tree number, species, trunk diameter at 1.m above ground level, tree height, crown spread (radius), age, class and estimated remaining years. Any specific observation or recommendations with regard to management were also noted.

A plan drawing indicating the location of each tree assessed is included in Appendix 2.

The condition of each tree was assessed according to the following categories:

Category A

Those trees of high quality and value. Significant trees that are structurally sound and can be retained in the long term (i.e., >40 years) or trees that can be retained in the long term following remedial tree surgery. Colour code on the plan: pale green.

Category B

Those trees of moderate quality and value. Trees that may live 15-40 years. Trees that may live for more than 40 years, but whose removal may be required in that time frame to allow development of retained trees. Trees that are defective but could be retained in the medium term by remedial tree surgery. Colour code on the plan: mid blue.

Category C

Those trees of low quality and value. Trees that can only be retained in the short term (.e, 5-15 years) and that have little landscape impact due to poor form or condition. Trees having a stem diameter of <150mm at 1.5m above ground level that could be replaced. Colour code on the plan: grey.

Category U

Unsuitable for retention. Trees that are dead, dying or diseased that will become dangerous in the near future (within years). Colour code on the plan: red.

Categories A, B and C have further sub-categories with regard to the reasons for tree retention:

- 1: Mainly arboricultural values
- 2: Mainly landscape values
- 3: Mainly cultural values, including conservation.

2.2 Root Protection Area (RPA)

In order to avoid damage to the roots or rooting environment of retained trees, the RPA has been calculated for each of the category A, B and C trees. This is a minimum area of m², which should be left undisturbed around each retained tree.

These figures are calculated utilising the formula below taken from BS 5837 (2012):

Single stem tree

$$\text{RPA m}^2 = \frac{\{ \text{Stem diameter (mm) @ 1.5 x 12} \}^2}{1000} \times 3.142$$

Trees with more than one stem below 1.5m above ground level

$$\text{RPA m}^2 = \frac{\{ \text{Basal diameter (mm) @ 10} \}^2}{100} \times 3.142$$

During construction works the root protection areas – ‘Construction Exclusion Zones’ are to be protected by barriers and ground protection in accordance with Section 9.0 of BS 5837:2012 and as specified and indicated on an approved Tree Protection Plan.

Where construction operations (demolition / hard surfacing) are proposed/ permitted within the Root Protection Area precautions should be taken to maintain the condition and health of the root system in accordance with BS5837:2012.

Construction of hard surfacing within the root protection area should be designed to avoid root loss during excavation. The structure of the hard surface should be designed to avoid localised compaction, including the use of three dimensional cellular confinement system as an integral component of the sub-base.

The hard surfacing in these areas should be a permeable and gas-porous nature such as washed gravel or paving slabs and block pavers (with infiltration spaces). Edge supports such as kerb and edgings on foundations and haunchings are not to be used within the RPA. Consideration should be given to the use of pegged timber edging or propriety or steelpaver or edge restraints.

3.0 Results

There are 14 trees on the wider site, with 7 groups of trees and 3 hedges. The tree quality on site includes five A category trees, the hedges and two trees (T6 & T7) are B category and the remaining trees on site are C quality. There are no U category trees on site.

In general, A and B category trees or hedges should be retained and carefully protected during any development work with appropriate root protection fencing. As many C category trees and hedges as possible should be protected and retained, although suitable replacement planting within the scheme area could adequately mitigate for losses of category C trees. U category trees are unsuitable for retention and should be removed.

A map detailing the location of trees and their BS5837:2012 determined category can be seen in Appendix 2, all other trees on site are noted as being below 150mm stem diameter and therefore, outside the requirements of BS5837:2012. Trees below 150mm stem diameter but above 75 mm stem diameter are included in the topographical survey of the site. Appendix 1 contains images of all the trees and all significant specimens.

Scientific names for species identified:

Common Name	Species Name
Ash	<i>Fraxinus excelsior</i>
Hawthorn	<i>Crataegus monogyna</i>
Oak	<i>Quercus robur</i>
Sycamore	<i>Acer pseudoplatanus</i>
Willow	<i>Salix sp.</i>
Poplar	<i>Populus nigra 'Italica'</i>
Leyland cypress	<i>Cupressus × leylandii</i>
Scots Pine	<i>Pinus sylvestris</i>

Tree no.	Species	Stem diam (mm) DBH	Crown S (m)	Crown W (m)	Crown E (m)	Crown N (m)	Height (m)	Age Class	Estimated remaining contribution (years)	Physiological and Structural Condition	Category	Radius of nominal circle	Root Protection area (m ²)
G1	Willow	To 75	3	3	3	3	4	Early mature	5-15		C1	0.90	3
G2	Poplar	To 150	2	2	2	2	7	Early mature	5-15	Self set	C1	1.80	10
G3	Poplar (2 trees)	750	7	7	7	7	18	Mature	15-40	2m to boundary	B2	9.00	255
G4	Leyland cypress	300	3	3	3	3	11	Early mature	5-15		C2	3.60	41
G5	Leyland cypress	200	2	2	2	2	7	Early mature	5-15		C1	2.40	18
G6	Leyland cypress	300	2	2	2	2	8	Early mature	5-15		C1	3.60	41


G7	Ash (2 trees)	300	5	5	5	5	12	Early mature	15-40		B2	3.60	41
T1	E. Oak	900	9	9	9	9	15	Mature	40+		A3	10.80	366
T2	E. Oak	900	8	8	8	8	18	Mature	40+		B2, A3	10.80	366
T3	Ash	1100	8	8	8	8	18	Mature	40+	In senescent stage, with stem cavities and saprophytic fungi. High BRP.	A3	13.20	547
T4	Ash	1100	9	9	9	4	18	Mature	40+	Moderate ivy. Moderate BRP.	A3	13.20	547
T5	Ash	200	3	3	3	3	7	Semi- mature	5-15		C1	2.40	18
T6	Hawthorn	300	3	3	3	3	7	Mature	15-40		C1, B3	3.60	41

T7	Hawthorn	300	3	3	3	3	7	Mature	15-40		C1, B3	3.60	41
T8	E.Oak	250	3	3	3	3	9	Semi-mature	5-15		C1	3.00	28
T9	Scots pine	350	3	3	3	3	12	Semi-mature	5-15		C2	4.20	55
T10	Ash	1100	6	6	6	6	14	Mature	40+	High BRP.	A3	13.20	547
T11	Ash	275	5	5	5	5	9	Semi-mature	5-15		C1	3.30	34
T12	E.Oak	200	3	3	3	3	7	Semi-mature	5-15		C1	2.40	18
T13	Ash	175	2	2	2	2	6	Semi-mature	5-15		C1	2.10	14

T14	Ash	250	5	5	5	5	9	Semi-mature	5-15		C1	3.00	28
T15	Sycamore	700	6	6	6	6	13	Mature	40+		B2	8.40	222
T16	Sycamore	2x 225	6	6	6	6	8	Mature	5-15	Coppice form base, two main stems both 225.	C1	4.80	72
H1	Hawthorn, Ash, Elder	To 150	-	-	-	-	1.6	Hedge		2m width.	B3	1.80	10
H2	Hawthorn, blackthorn, field maple	To 150	-	-	-	-		Hedge		2m width.	B3	1.80	10
H3	Hawthorn	To 200	-	-	-	-	4	Hedge		3m width.	B2	2.40	18

G = Group H = Hedge T = Tree

4.1.1 Tree Removal and Retention Plans:

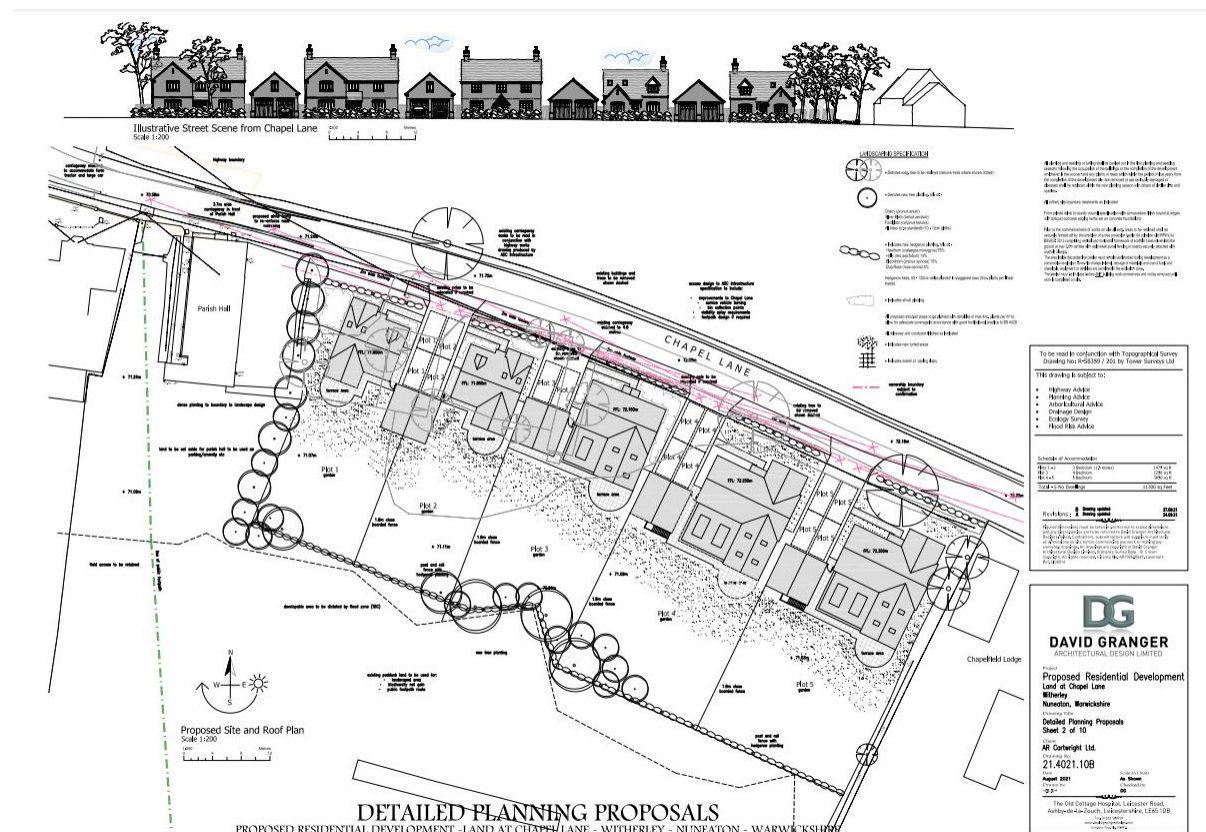

The current plans suggest the removal of T11, T12, T13, T14, T16 and G7 and the loss of most of H2 (B category). G7 includes three B category Ash trees, two of which are situated along the road frontage, these are to be retained, the other is further within the site, and is to be removed. In addition, building the proposed house in plot 5 will cause incursion into the root protection zone of T10 an A category road frontage tree. The development will require piling construction to minimise damage to the root zone of this tree. A considerable number of trees within the wider site to the South and in neighboring land to the East are outside the Zone of Influence of the development.

It is recommended as many on-site trees as possible are retained, with substantive additional tree planting to create a wooded development, with garden trees, road side trees, tree lined avenues,

hedges with standard trees around every property, light standards being planted within and around the existing hedge boundary of the site and retention of all existing trees.

It is recommended that tree protection fencing be erected around the root zones of the retained trees in the development zone to prevent any root compaction via storage of materials or access onto the site.

4.1.2 Avoiding Accidental Damage to Trees: Trees may be negatively affected by the construction period by both direct and indirect actions, which are often borne out of ignorance as to the tree physiological requirements. Careful site planning and management along with the implementation of robust physical protection measures is necessary to ensure the retention of important trees.

4.1.3 Soil and Root Protection: It is essential to safeguard a pre-determined volume of soil around the base of the retained trees to ensure that their ongoing biological functioning of the root system along with the interaction with the soil is not impaired. This requires, that prior to the commencement of development activity on site that a robust protective barrier is erected.

4.1.4 Suitable Barriers: The specifications for this barrier should be as per the British Standard 5837 of 2012 (Trees in Relation to Construction – recommendations). In brief, this consists of 2.3m high panels attached to an adequately braced scaffold structure to deter un-authorized dismantling and robust enough to rebut physical impacts from site plant and machinery. In practice Heras weld-mesh type panels perform well when attached to the above mentioned scaffold structure.

4.1.5 Bird breeding season: All site clearance should ideally take place outside of the bird breeding season. Bird breeding season is between mid March and mid July, although certain species can breed outside these months and if breeding birds are found then work should cease and the advice of an ecologist sought. If clearance is undertaken within the bird breeding season then all site features should preferably be checked immediately prior to clearance by a suitably qualified ecologist.

4.1.6 Shading: The trees are location along the site edges so there is unlikely to be any shade issues.

4.2 Tree Protection & Ground Protection

4.2.1 All trees that are being retained on site are to be protected by barriers and/or ground protection before any materials or machinery are brought onto the site, and before any demolition, development or stripping of soil commences. Where all activity can be excluded from the RPA, vertical barriers are to be erected to create a construction exclusion zone. The default barrier specification is to be in accordance with BS 5837:2012 'Trees in Relation to Design, Demolition and Construction - Recommendations' as illustrated in Figure 3 below.

4.2.2 The protected area is to be regarded as sacrosanct, and, once installed, barriers and ground protection is not to be removed or altered without prior recommendation by the project arboriculturist and, where necessary, approval from the Local Planning Authority.

4.2.3 All weather tree protection posters (an example is detailed in Figure 4 below) are to be securely fixed to the tree protection fencing in plain view.

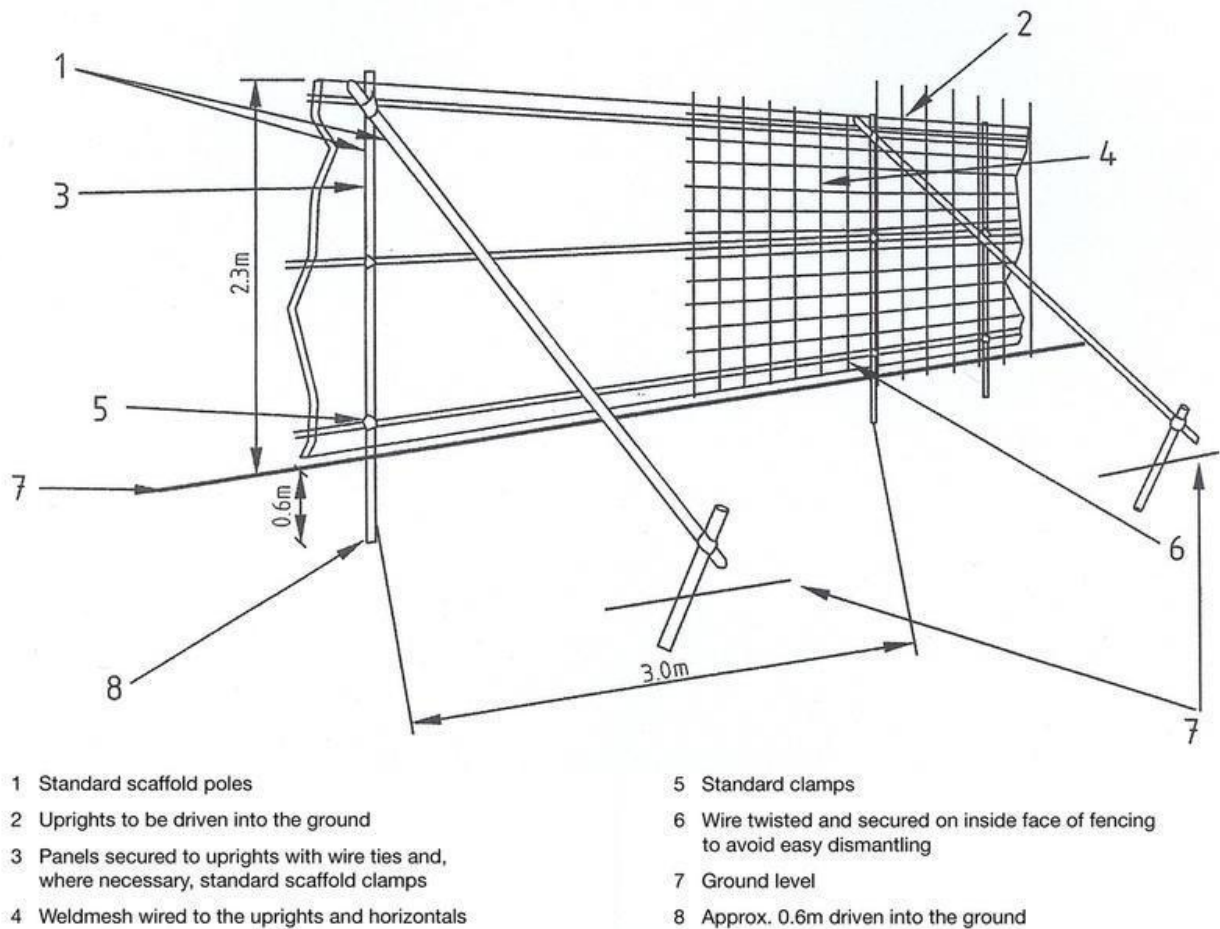


Figure 3. Example of protective fencing required for all Root Protection Areas.



Figure 4. Example of an all weather tree protection poster.

4.2.4 Care is to be exercised when locating the vertical poles to avoid underground services and, in the case of the bracing poles, also to avoid contact with structural roots. If the presence of underground services precludes the use of driven poles, an alternative specification that provides an equal level of protection is to be prepared in conjunction with the project arboriculturist as illustrated within Figure 3 above.

4.2.5 Where the set-back of the tree protection barrier exposes unmade ground to construction damage, temporary ground protection is to be installed as part of the implementation of physical tree protection measures prior to work starting on site.

4.2.6 Temporary ground protection is to be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil. Detail is shown in Figure 5 below: Scaffolding and root protection within the RPA.

a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane.

b) for pedestrian-operated plant up to a gross weight of 2t, proprietary, inter-linked ground protection boards placed on top of a compression resistant layer (e.g. 150 mm depth of woodchip), laid onto a geotextile membrane.

c) for wheeled or tracked construction traffic exceeding 2t gross weight, an alternative system (e.g. proprietary systems or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected.

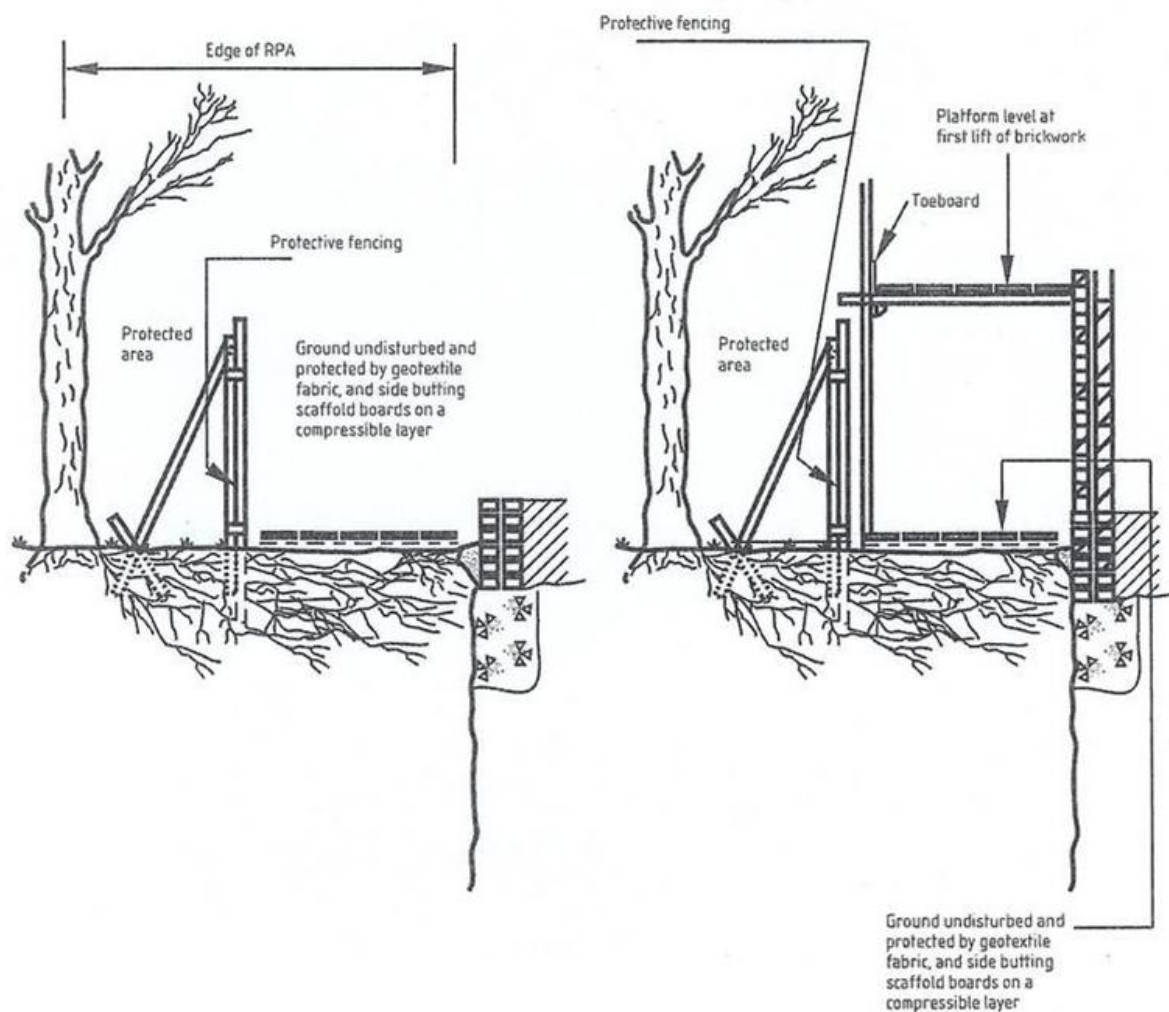


Figure 5. Scaffolding and root protection within the Root Protection Area.

4.3 Landscape considerations:

Consideration should be given to maintaining tree-lined boundary features, landscape impacts, habitat connectivity and reinforcing site boundaries. Further consideration should be given to the appearance of frontages and screening. The appropriate landscape mitigation and compensation will need to be discussed at the pre-application stage with the appropriate Local Authority Planning Landscape Officer. It is recommended that compensation planting is undertaken and located to enable the landscape value of this area to be reinforced, if any trees with landscape value are to be removed from the site.

In compensation for the loss of any of the existing trees, at least an equal number of native trees should be planted as part of the new development. The trees will be species that have wildlife benefits and are sympathetic both to the existing tree structure and suitable for their likely eventual size limitation, such as hawthorn, elder, rowan, crab apple, and silver birch. All trees will be planted as 9-10cm Light Standards. All appropriate British Standards will be applied in terms of planting specifications. The location of the replacement trees should be determined in a detailed landscape design plan including location and species. Substantive additional planting is indicated in the plans, see below:



Appendix 1: Images of trees and shrub vegetation










Appendix 2: Tree Location Plan

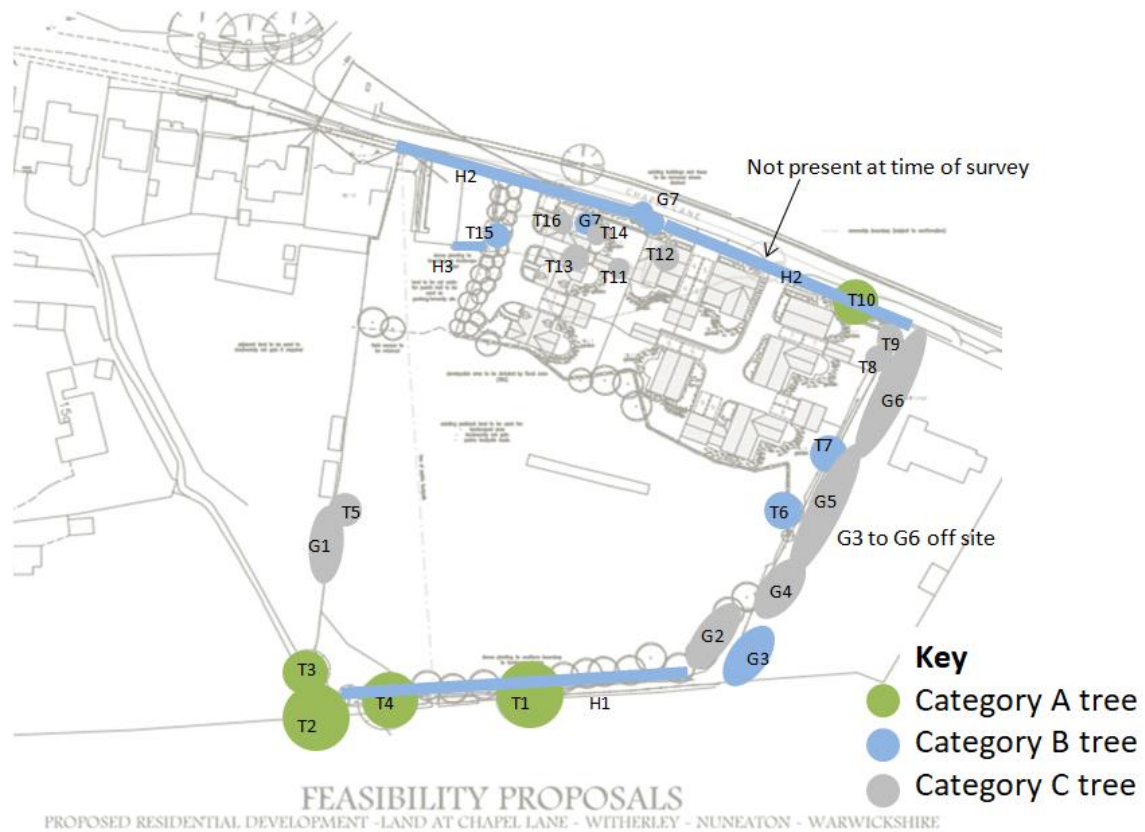

Note plan revision below, tree impacts are the same.



Revised plan above

Category A

Those trees of high quality and value. Significant trees that are structurally sound and can be retained in the long term (i.e. >40 years) or trees that can be retained in the long term following remedial tree surgery. Colour code on the plan- pale green.

Category B

Those trees of moderate quality and value. Trees that may live 15-40 years. Trees that may live for more than 40 years, but whose removal may be required in that time frame to allow development of retained trees. Trees that are defective but could be retained in the medium term by remedial tree surgery. Colour code on the plan- mid blue.

Category C

Those trees of low quality and value. Trees that can only be retained in the short term (i.e. 5-15 years) and that have little landscape impact due to poor form or condition. Trees having a stem diameter of <150mm at 1.5m above ground level that could be replaced. Colour code on the plan- grey.

Category U

Trees that are dead, dying or diseased that will become dangerous in the near future (within years). Colour code on the plan- red.