



KEY TO LANDSCAPE PROPOSALS

Existing Vegetation

- Existing Trees to be Retained**
Location of existing trees to be retained (see tree survey for details)
- Existing Hedges to be Retained**
Location of existing hedges to be retained and/or reinforced with additional hedge planting


Proposed Planting Details & Specification

The landscaping proposals are provided in accordance with item 1 of Condition 7 above. All areas of new landscaping to have the existing topsoil and subsoil decompacted by hand digging or rotorator. If any imported topsoil is required it should be placed to a depth of 100 in grass areas and 300mm minimum in shrub areas. All landscaping subject to applicant discretion. Planting should take place during the dormant planting season ie October to March.

Tree Planting

Replacement specimen trees in accordance with "BS 8545:2014 Trees: from nursery to independence in the landscape" to be planted in locations indicated as per the following:

Excavate tree pit to provide 5m³ of rooting volume, plant tree, backfill with 600mm subsoil, 300mm topsoil and secure with timber stake and rubber tie and spacer.

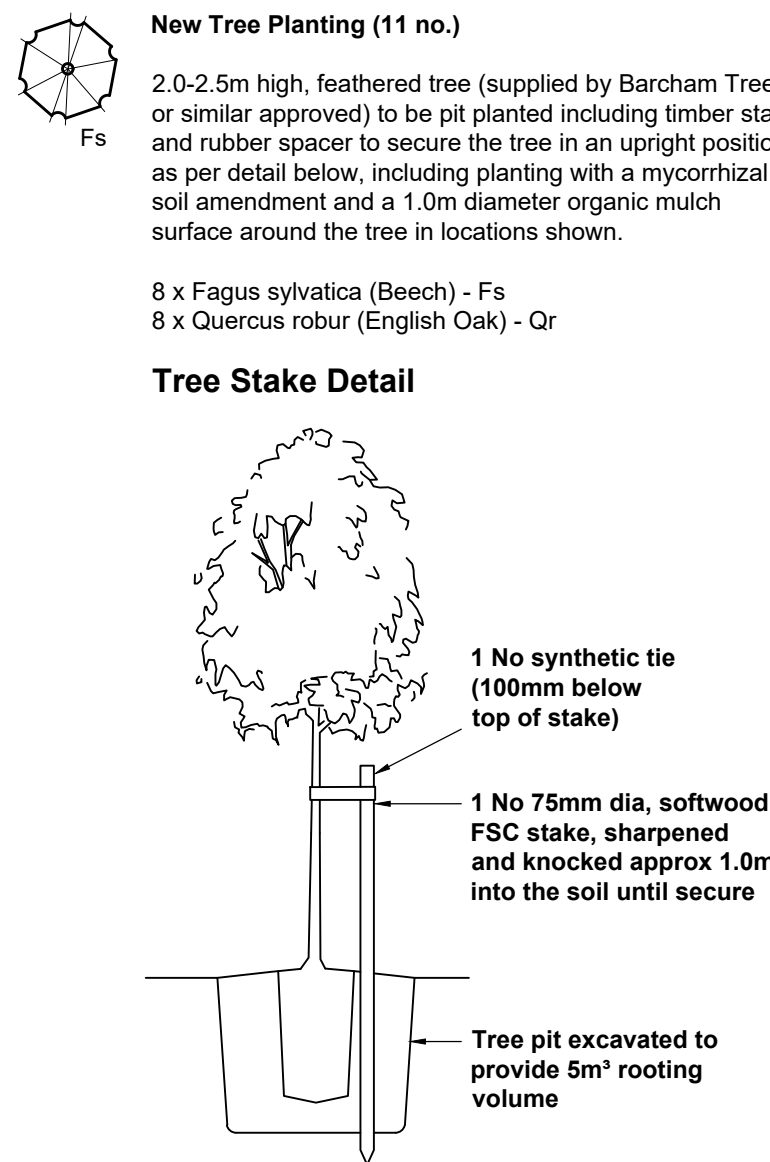


New Tree Planting (11 no.)

2.0-2.5m high, feathered tree (supplied by Barcham Trees or similar approved) to be pit planted including timber stake and rubber spacer to secure the tree in an upright position as per detail below, including planting with a mycorrhizal soil amendment and a 1.0m diameter organic mulch surface around the tree in locations shown.

8 x Fagus sylvatica (Beech) - Fs
8 x Quercus robur (English Oak) - Qr

Tree Stake Detail

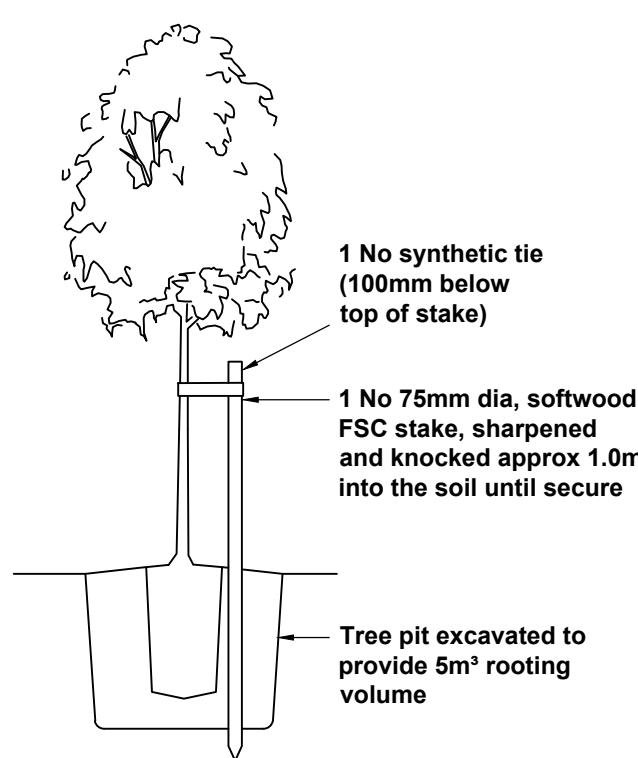

Garden Lawns & Verges

Existing grass to be retained where possible. Any bare or damaged areas are to be re-turfed as follows:

A minimum of 100mm depth of good quality top soil, free of vegetation to be turned over, levelled, lightly consolidated and free from surface stones, other debris and perennial weeds before laying turf (eg Rowlaw Medallion or similar approved) and thoroughly water immediately after and continuously during dry weather until well established.

Grass Lawns & Verges

Garden lawns and grass verges to be grassed with turf laid to the above spec or seeded with the following seed mix, maintained by the home owners:

- 25% Dwarf perennial ryegrass
- 30% Slender creeping red fescue
- 45% Strong creeping red fescue

Hedge Planting

A new native hedgerow is to be planted behind the visibility splay line indicated on the plan above to replace the existing hedge which is to be removed to enable full visibility for vehicles exiting the site.

Cultivate and grade shrub bed, bring top 300mm of soil to a fine tilth, including Enmag fertilizer applied and worked into to 100m, rake and bring to given levels, remove all stones and debris over 50mm, dig planting holes (average 300 x 300 x 300 deep), supply and plant specified shrubs and plants in densities specified, backfill with excavated material as above, water in and mulch with 75mm bark chippings 20-40mm size. Water and weed regularly for 12 months and replace failed plants.

Native Hedgerow Planting

Hedging to be pit planted, including bulky organic compost backfill, in a double staggered row at 5 plants/m at 45cm spacings. Plants to be supplied as 60-80m bareroot nursery stock and protected from rabbit damage by spiral guards.

- 25% Corylus avellana (Hazel)
- 25% Ilex aquifolium (Holly)
- 15% Prunus laurocerasus Rotundifolia (Cherry Laurel)
- 15% Taxus baccata (Yew)
- 10% Crataegus monogyna (Hawthorn)
- 10% Cornus sanguinea (Common dogwood)

Hard Landscaping

All paved surfacing constructed to Architects specification and details

- Patios and Paths**
Patio and footpaths to be paved with buff coloured slabs
- Access Driveway**
Driveway to be block paved with brindle paving blocks

© Encon Associates - DISCLAIMER:

■ This drawing is copyright and shall not be reproduced nor used for any other purpose without the written permission of Encon Associates ■ This drawing must be read in conjunction with all other related drawings and documentation ■ It is the contractors responsibility to ensure full compliance with the relevant Regulations ■ Until technical approval has been obtained from the relevant Authorities it should be understood that all drawings issued are PRELIMINARY and NOT for Construction ■ Should the contractor start site work prior to approval being given, it is entirely at his own risk ■ Do not scale from this drawing, use figured dimensions only ■ It is the contractors responsibility to check and verify all dimensions on site ■ Any discrepancies to be reported to Encon Associates immediately ■ All survey information is provided by the surveying company and Encon Associates cannot accept any liability for any discrepancies there in ■ All survey information to be verified on site by Contractor ■ For our Standard Terms and Conditions, please visit www.enconassociates.co.uk/terms ■ Alternatively, a hard copy can be posted to you

Notes:

This drawing is based on the following:

- Site Plan ref DSA-20128-SP-04-A dated 28-11-2022
Revision A dated 23.03.2023

C	14.04.23	Amended in line with client comments	MJB	GLM
B	11.04.23	Amended in line with revised site plan	MJB	GLM
A	05.11.19	Amended in line with Tree Officer comments	MJB	GLM

Rev	Date	Description	Drawn	Checked
-----	------	-------------	-------	---------

Client

C/O DSA

Project
Manor Lodge
13 Station Road
Desford

Title
Proposed Landscaping &
Tree Protection Plan

Drawing Status
DISCHARGE PLANNING CONDITIONS

Drawn	MJB	Checked	EK
-------	-----	---------	----

Date	01.10.19	Scale (A1)	1:200
------	----------	------------	-------

encon associates
Head Office
10 Chapel Lane
Nottingham
NG5 7DR
T: 0115 987 55 99 E: enquiries@enconassociates.co.uk W: www.enconassociates.co.uk

Environmental Consultants to the Construction Industry

■ BREXAM ■ Code for Sustainable Homes Assessors ■ Landscape Architecture ■ Highway Engineers
■ Life Cycle Costing ■ Energy Assessments ■ SAP ■ EPC ■ BREEAM ■ Daylight Calculations

Job Number	Drawing Number	Rev
A4409	01	C