Note: Planting specification as per notes on ESA Dwg 06-20/03-2

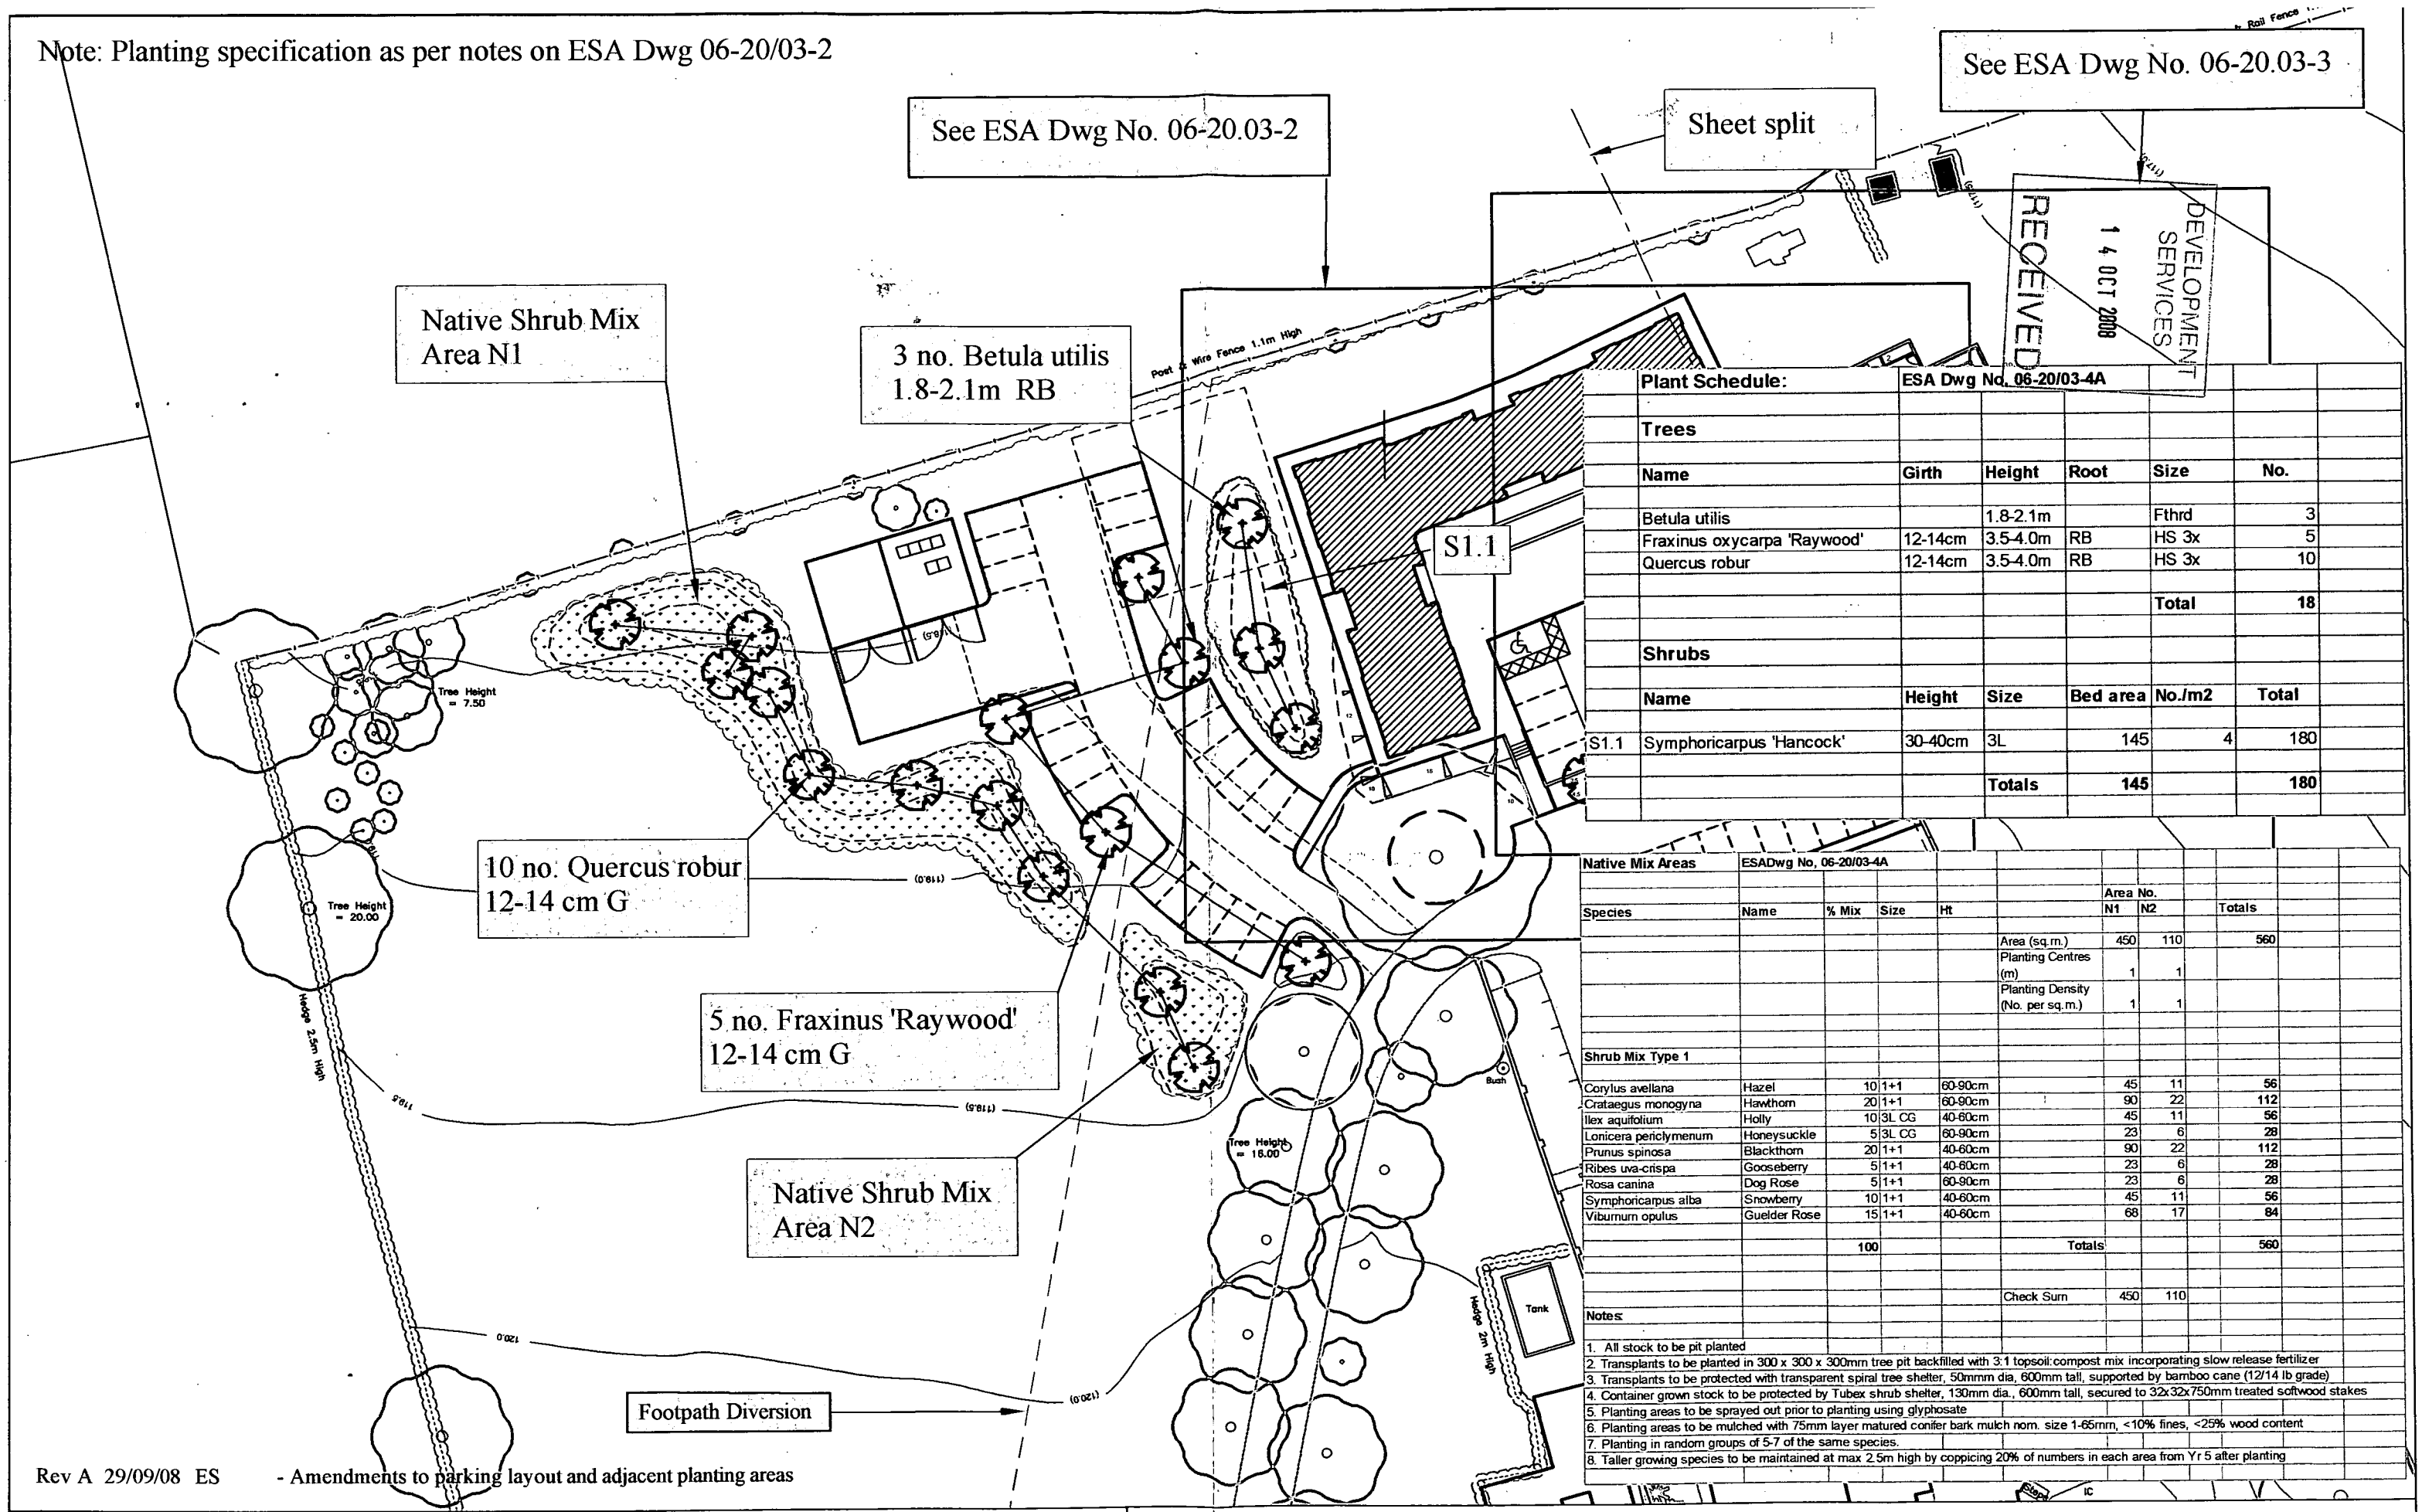

Plant Schedule:	ESA Dwg No. 06-20/03-4A				
Trees					
Name	**Girth**	**Height**	**Root**	**Size**	**No.**
Betula utilis		1.8-2.1m		Fthrd	3
Fraxinus oxycarpa 'Raywood'	12-14cm	3.5-4.0m	RB	HS 3x	5
Quercus robur	12-14cm	3.5-4.0m	RB	HS 3x	10
				Total	**18**
Shrubs					

	Name	**Height**	**Size**	**Bed area**	**No./m2**	**Total**
S1.1	Symphoricarpus 'Hancock'	30-40cm	3L	145	4	180
			Totals	**145**		**180**

Native Mix Areas	ESADwg No, 06-20/03-4A								
						Area No.			
Species	Name	% Mix	Size	Ht		N1	N2	Totals	
					Area (sq.m.)	450	110	560	
					Planting Centres (m)	1	1		
					Planting Density (No. per sq.m.)	1	1		
Shrub Mix Type 1									
Corylus avellana	Hazel	10	1+1	60-90cm		45	11	56	
Crataegus monogyna	Hawthorn	20	1+1	60-90cm		90	22	112	
Ilex aquifolium	Holly	10	3L CG	40-60cm		45	11	56	
Lonicera periclymenum	Honeysuckle	5	3L CG	60-90cm		23	6	28	
Prunus spinosa	Blackthorn	20	1+1	40-60cm		90	22	112	
Ribes uva-crispa	Gooseberry	5	1+1	40-60cm		23	6	28	
Rosa canina	Dog Rose	5	1+1	60-90cm		23	6	28	
Symphoricarpus alba	Snowberry	10	1+1	40-60cm		45	11	56	
Viburnum opulus	Guelder Rose	15	1+1	40-60cm		68	17	84	
		100			Totals			560	
					Check Sum	450	110		

Notes:

1. All stock to be pit planted
2. Transplants to be planted in 300 x 300 x 300mm tree pit backfilled with 3:1 topsoil:compost mix incorporating slow release fertilizer
3. Transplants to be protected with transparent spiral tree shelter, 50mmm dia, 600mm tall, supported by bamboo cane (12/14 lb grade)
4. Container grown stock to be protected by Tubex shrub shelter, 130mm dia., 600mm tall, secured to 32x32x750mm treated softwood stakes
5. Planting areas to be sprayed out prior to planting using glyphosate
6. Planting areas to be mulched with 75mm layer matured conifer bark mulch nom. size 1-65mm, <10% fines, <25% wood content
7. Planting in random groups of 5-7 of the same species.
8. Taller growing species to be maintained at max 2.5m high by coppicing 20% of numbers in each area from Yr 5 after planting

Rev A 29/09/08 ES - Amendments to parking layout and adjacent planting areas

Ed Sharkey Associates

Landscape Architects and Environmental Consultants

49 Meadow Rise, Barton under Needwood, Burton upon Trent, Staffs. DE13 8DT
Tel/Fax: 01283 713124 Mobile: 07973 151820, E-mail: ed@edsharkey.demon.co.uk

Project: Shropshire Land Co. - Desford Hall, Leicester Lane, Desford, Leics., LE9 9JJ — App. No 05/ 00573/ FUL

Title: Planting Plan - Screening to compound — Planning Issue

Date: Nov 2007 — **Scale:** 1:500 @ A3 — **Dwg No. :** 06-20.03-4 A