


KEY

- Proposed Trees
- Proposed Hedges
- Proposed Shrubs
- Proposed Cultivated Turf
- Existing Vegetation Retained
- Existing Hedges & Vegetation
- Permeable Resin Bound Surface
- Paving Slab Finish
- Compactable Gravel Finish
- Ornamental Gravel Finish
- Existing Trees Removed
- Existing Trees Retained
- Timber Retaining Walls & Planters
- 1.8m High Timber Post & Gravel Board Fence
- New Brick Wall
- Existing Fencing Retained

Corylus avellana 'Contorta'

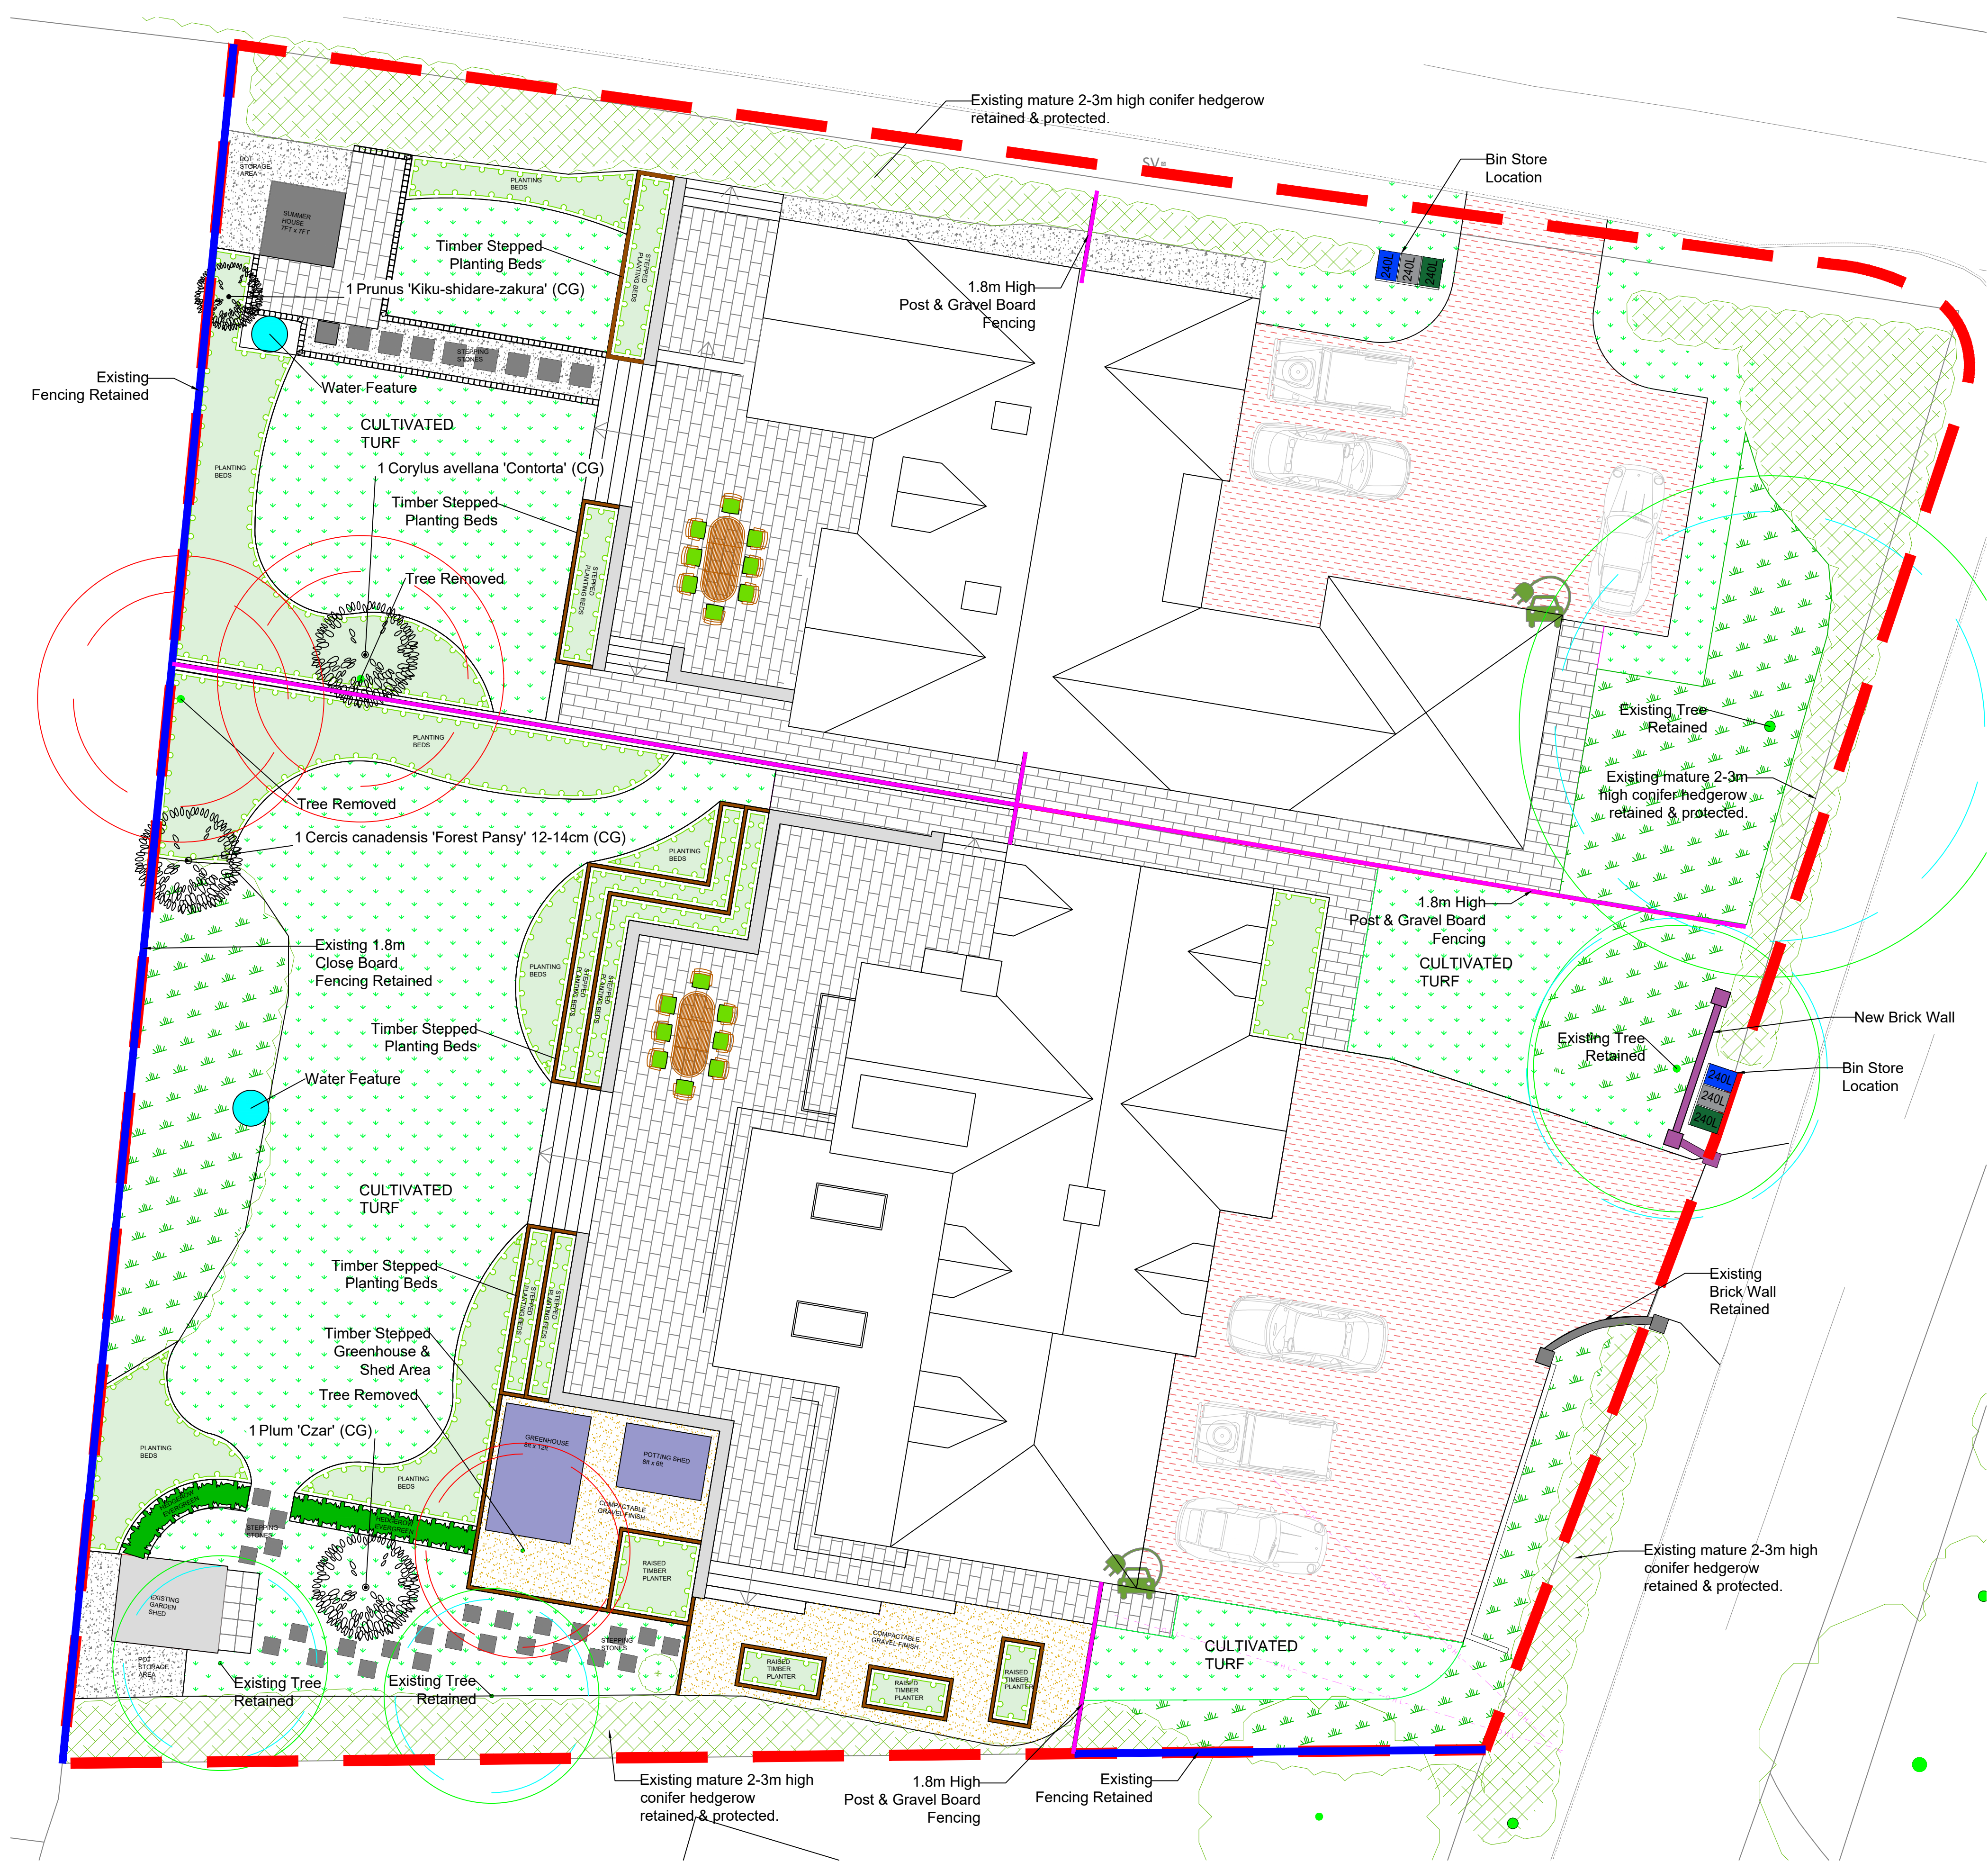

Prunus 'Kiku-shidare-zakura'



Landscaping Schedule

Trees						
Abbreviation	Species	Height	Girth	Pot Size	Number	
CERCAFP	Cercis canadensis 'Forest Pansy'	350-400cm	12-14cm	(CG)	1	
CORAVC	Corylus avellana 'Contorta'	175-200cm		(CG)	1	
PLUCZ	Plum 'Czar'	100-125cm		(CG)	1	
PRUKI	Prunus 'Kiku-shidare-zakura'	175-200cm		(CG)	1	

Cercis canadensis 'Forest Pansy'



Plum Czar



Tiered Timber Retaining Wall Example



Rev	Comments	Date
A	Bin & Boundary Locations Updated	06.10.23



Landscaping Design, Management & Consultancy

The Knoll, Leicester Road, Earl Shilton, Leicester, LE9 7TJ
Tel: (01455) 850250
email: jon.king@eastmidlandslandscaping.co.uk

© This drawing and the building works depicted are the copyright of East Midlands Landscaping Ltd and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

Title: Landscaping Plan

Client: Springbourne Homes

Project: Green Crest
Higham Lane, Stoke Golding
CV13 6EY

Project	Org	Vol	Level	File Type	Form	Role	Sheet
1225	EML	XX	XX	DR	D	L	01

Status:	Planning	Date:	07.07.2023
Drawn:	JG	Revision:	A
EML JOB NO:	1219	Scale:	1:100 @ A1