
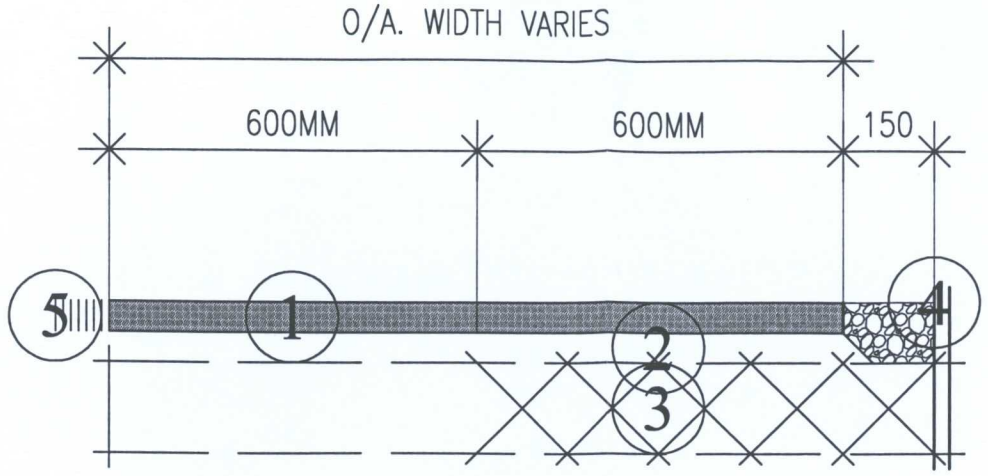


CONCRETE PAVING SLAB DETAIL:

1. 600 x 600 x 50mm concrete riven paving slabs: (colour buff)
2. 1:4 cement:sand semi-dry full mortar bedding nominal 25mm thickness:
3. Well consolidated granular fill:
4. Decorative gravel margin to external perimeter of building:
5. Soft landscaping:

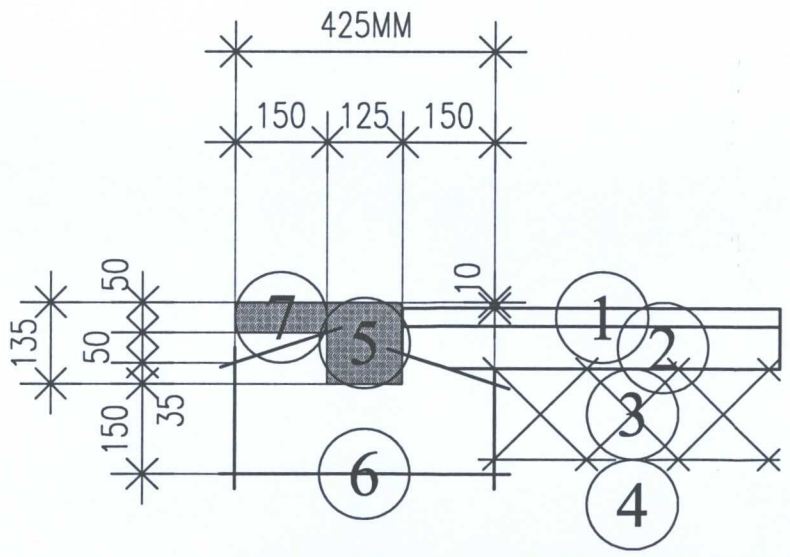

TARMACADAM PAVING & KERB DETAIL TO PARKING AREA:

1. Wearing course 6mm nominal size dense bitumen macadam:
   (compacted thickness 30mm)
2. Base course 20mm nominal size dense bitumen macadam:
   (compacted thickness 70mm)
3. Sub-base well compacted 'Type 1' granular material:
   (compacted thickness 200mm)
4. Sub-grade well compacted to falls:
5. 125 x 135mm pre-cast concrete bullnosed drop kerb:
6. C20 concrete base & haunching:
7. 600 x 600 x 50mm concrete riven paving slabs: (colour buff)

REVISIONS

-	-	-

HOMEWOOD

S MORRIS T/AS HOMEWOOD DESIGN
SUITE 1
LEONARD HOUSE
14 SILVER STREET
TAMWORTH
STAFFORSHIRE
B79 7NH

T : 01827 55503
F : 01827 55301
E : INFO@HOMEWOODESIGN.CO.UK
W : WWW.HOMEWOODESIGN.CO.UK

CLIENT:
MR A DODSON

PROJECT:
NEW DWELLING
42 HOLLYCROFT
HINCKLEY
LEICESTERSHIRE
-

DRAWING TITLE:
WORKING DRAWING
EXTERNAL PAVING DETAILS

DETAILS

SCALE	CHECKED
1:12.5	
DATE	DRAWN BY
AUG.2010	SM

DWG.NO		REV.
542	04	-