


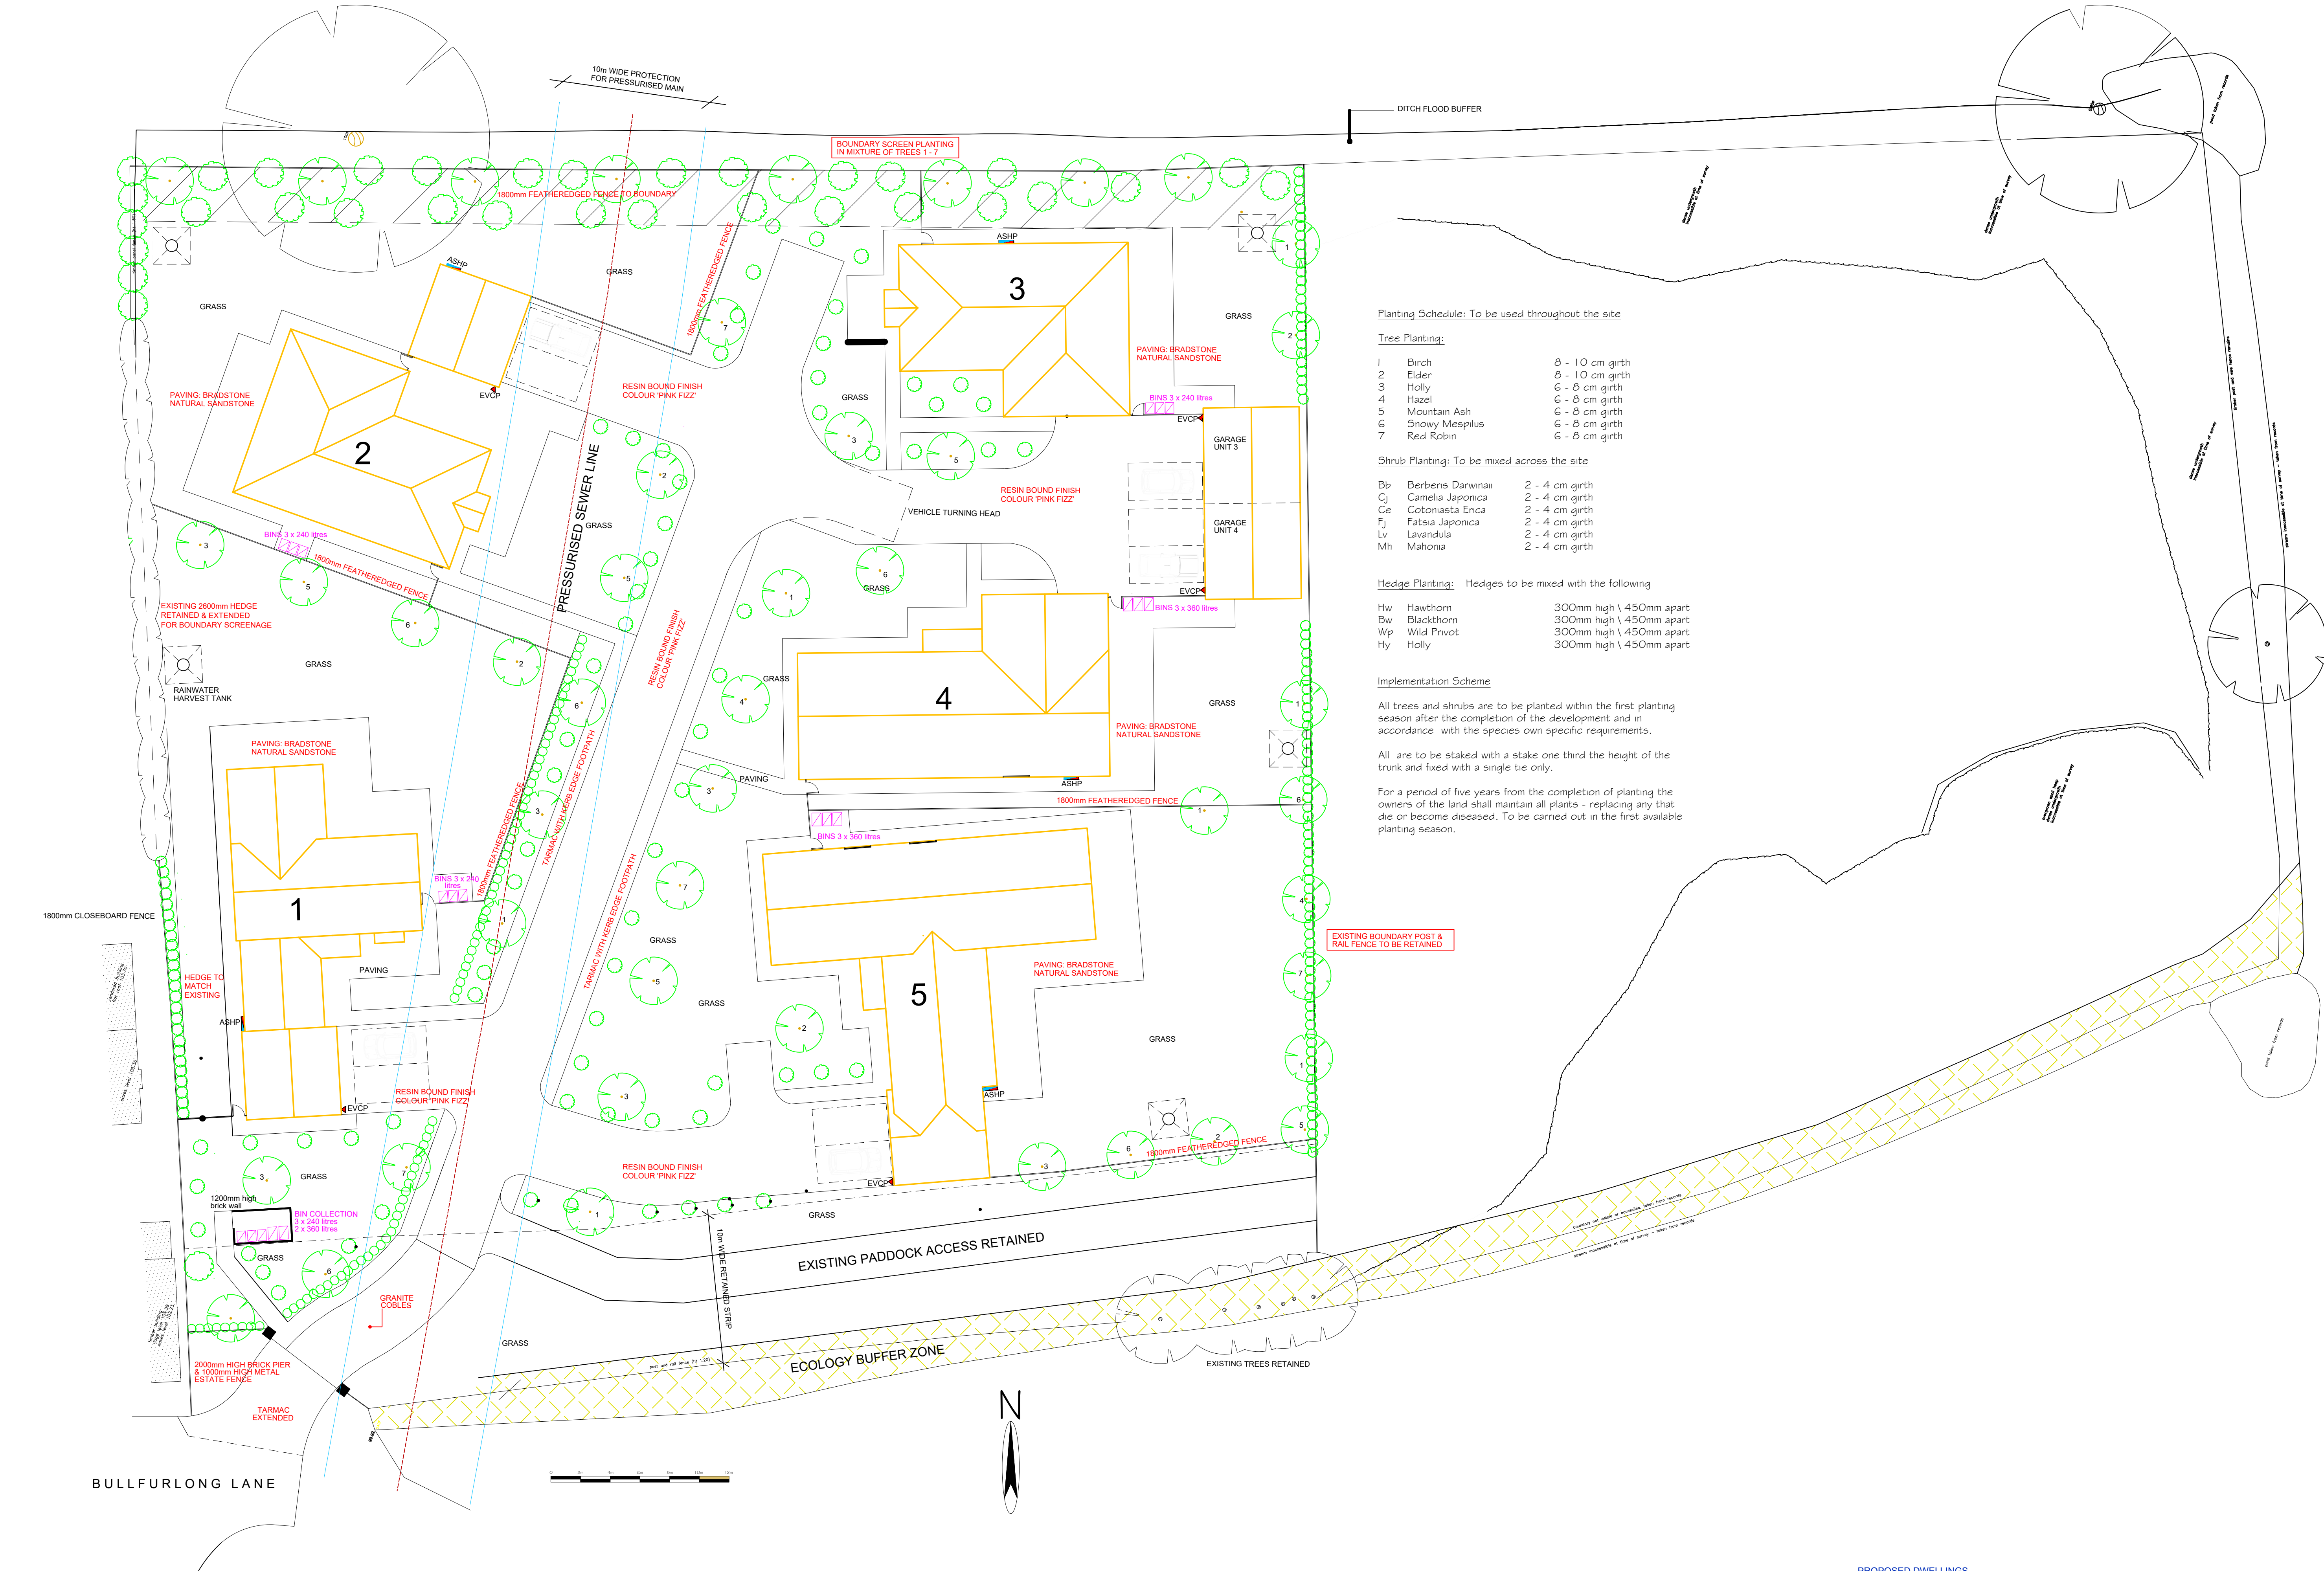

Planting Schedule: To be used throughout the site

Tree Planting:

1	Birch	8 - 10 cm girth
2	Elder	8 - 10 cm girth
3	Holly	6 - 8 cm girth
4	Hazel	6 - 8 cm girth
5	Mountain Ash	6 - 8 cm girth
6	Snowy Mespilus	6 - 8 cm girth
7	Red Robin	6 - 8 cm girth

Shrub Planting: To be mixed across the site

Bb	Berberis Darwinai	2 - 4 cm girth
Cj	Camelia Japonica	2 - 4 cm girth
Ce	Cotoniasta Enca	2 - 4 cm girth
Fj	Fatsia Japonica	2 - 4 cm girth
Lv	Lavandula	2 - 4 cm girth
Mh	Mahonia	2 - 4 cm girth

Hedge Planting: Hedges to be mixed with the following

Hw	Hawthorn	300mm high \ 450mm apart
Bw	Blackthorn	300mm high \ 450mm apart
Wp	Wild Privot	300mm high \ 450mm apart
Hv	Holly	300mm high \ 450mm apart

Implementation Scheme

All trees and shrubs are to be planted within the first planting season after the completion of the development and in accordance with the species own specific requirements.

All are to be staked with a stake one third the height of the trunk and fixed with a single tie only.

For a period of five years from the completion of planting the owners of the land shall maintain all plants - replacing any that die or become diseased. To be carried out in the first available planting season.