



SIDE ELEVATION TO GARDEN ROOM
ELEVATION D


CLADDING
Allow for cedar cladding
to sides, inner and outer
backs



SIDE ELEVATION TO GARDEN ROOM
ELEVATION B

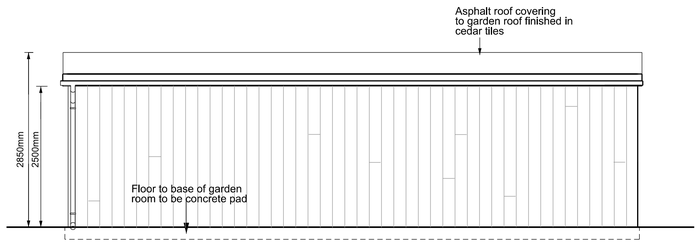


REAR ELEVATION TO GARDEN ROOM
ELEVATION C

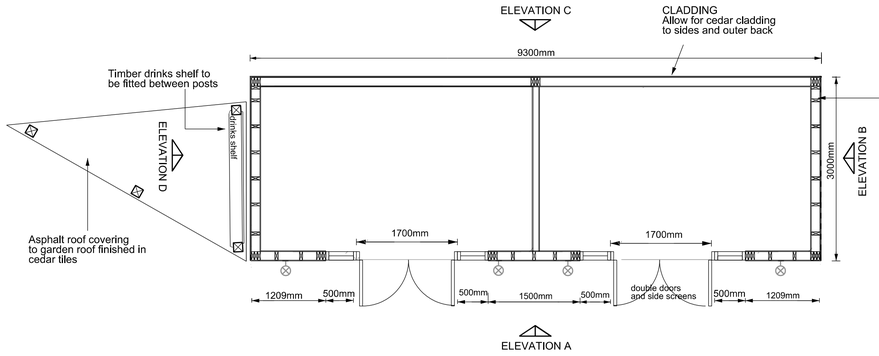

TIMBER FRAME

- 50 x 140 C24 TIMBER STUDS AT MAX. 400mm CENTRES
- SOLID TIMBER NOGGINS AT 1200mm VERT. CENTRES
- SHEATHED ONE SIDE USING 9mm OSB FIXED USING 3.0mm DIA. RING SHANKED NAILS @ 150mm C/CS TO PERIMETER OF SHEATHING AND 300mm C/CS IN BETWEEN (SHEATHING SUPPORTED ON ALL EDGES WITH STUDS OR NOGGINS)
- FRAME TO BE SECURED TO SOLE PLATE ISING 3.5mm DIA. 90mm LONG RING SHANKED NAILS AT 300mm C/CS ALONG PANEL LENGTH.
- SOLE PLATE (2NO 50 x 140 C24 TIMBERS) FIXED DOWN TO BLOCKWORK UNDER WITH FISCHER HAMMERFIX N8 x 120 Z FIXINGS @ 500mm C/CS ALONG LENGTH. DOUBLE CRIPPLE STUDS USED AT ALL OPENING / APERTURES REVEALS AS SHOWN.
- DOUBLE HEAD RAIL (50 x 140 C24 TIMBERS) TO HAVE CEILING JOISTS STRAPPED DOWN AND MECHANICALLY FIXED.

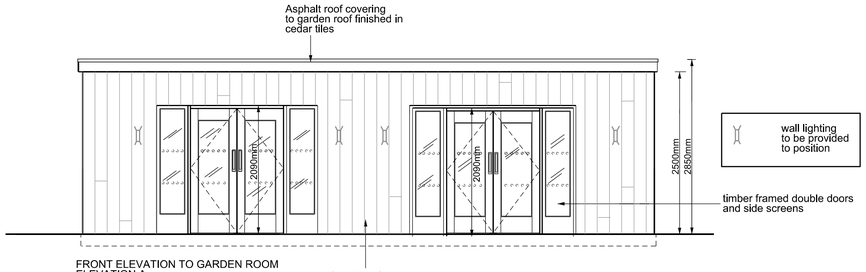


FRONT ELEVATION TO GARDEN ROOM
ELEVATION A

CLADDING
Allow for cedar cladding
to sides and outer back

CEDAR CLADDING TO ROOF OF
GARDEN ROOM

CEDAR CLADDING

POST DETAIL FOR PERGOLA C
AND GARDEN ROOM
FOR FIXING INTO GROUND

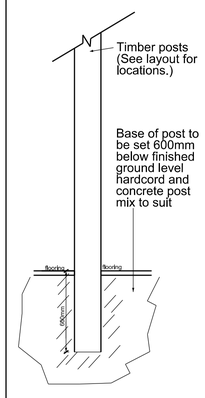

NOT TO SCALE

0 metres 1 2 3 4 5

SCALE

Copyright. This drawing and design and all the information contained therein is the sole copyright of Concept IDL and reproduction in any form is forbidden unless permission is obtained in writing.

CONTRACTORS PLEASE NOTE

1) Warning, no dimensions to be scaled from this drawing.All contractors to visit the site and be responsible for taking and checking all dimensions relative to this work. The designer must be advised of any discrepancies in writing.

2) This drawing must be read in conjunction with the specification / bill of quantities and related drawings. Any structural work must be carried out to the exact specification and requirements of the clients's appointed structural engineer, and any amendments must have his express prior written authority.

3) All structural work must be inspected at all relevant stages by the structural engineer and the Local Authority's Building Surveyor and comply with their requirements. Any costs and claims for damages, loss of trade, etc. incurred by failing so to do are the sole liability of the contractor.

4) Any discrepancies between drawings and/or drawings and specification, should be reported to the desigher prior to any work commencing.

	Date	Revisions	Ini.
B	01/07/24	Pergola B & C omitted Garden Room amended	CP
A	22/03/24	Pergola references aligned with Site Plan	CP

concept
Architecture - Interior Design -Project Management
Suit I, Sheffield Business Park Ltd
Sheffield Business Centre, Europa Link
Sheffield, S9 1XZ
Tel: 01709 371 170
Email: office@concept-intdes.co.uk
Website: www.concept-intdes.co.uk
Facebook: www.facebook.com/conceptldl

Client
Greene King

Job Title
THE CAB
BROOKFIELD ROAD
BURBAGE
HINCKLEY
LE10 2LL

Drawing Title
PERGOLA DETAIL B & C
and GARDEN ROOM DETAILS

Scale	Drawn By
1:50 @ A1	CP
Date	Checked By
MARCH 24	

Drg.no.	Rev.
3562-12	B