Plant Schedule: ESA Dwg No. 06-20/03-2A

Trees

	Name	Girth	Height	Root	Size	No.
	Fraxinus oxycarpa 'Raywood'	12-14cm	3.5-4.0m	RB	HS 3x	2
					Total	**2**

Shrubs

	Name	Height	Size	Bed area	No./m2	Total
S1.1	Cotoneaster dammeri	30-40cm	3L	12	4	50
S1.2	Mahonia aquifolium	30-40cm	3L	12	4	50
S1.3	Cotoneaster conspicuus decorus	40-60cm	3L	16	4	65
S1.4	Berberis wilsonae	40-60cm	3L	10	4	40
S1.5	Berberis wilsonae	40-60cm	3L	3.5	4	15
	Phormium tenax 'Purpureum'	60-90cm	10L			3
S1.6	Spirea 'Goldmound'	30-40cm	3L	4.5	5	25
S2.1	Spirea 'Goldmound'	30-40cm	3L	2.5	5	15
S2.2	Stephanandra incisa 'Crispa'	40-60cm	3L	3.5	5	20
	Phormium tenax 'Purpureum'	60-90cm	10L			3
S2.3	Cotoneaster conspicuus decorus	40-60cm	3L	5	4	20
S2.4	Berberis wilsonae	30-40cm	3L	7	4	30
S2.5	Cotoneaster microphyllus	40-60cm	3L	6	4	25
	Mahonia 'Charity'	60-90cm	10L			3
S2.6	Cotoneaster conspicuus decorus	30-40cm	3L	4.5	4	20
	Viburnum 'Eve Price'	60-90cm	10L			1
S3.1	Cotoneaster microphyllus	40-60cm	3L	2.5	4	10
S3.2	Escallonia 'Red Elf'	40-60cm	3L	3	4	15
	Osmanthus delavyii	60-90cm				1
S3.3	Cotoneaster conspicuus decorus	30-40cm	3L	5	4	20
	Osmanthus delavyii	60-90cm				1
S3.4	Spirea 'Goldmound'	40-60cm	3L	5.5	3	15
	Choisya 'Aztec Pearl'	60-90cm	10L			1
S3.5	Cotoneaster conspicuus decorus	40-60cm	3L	5	4	20
	Osmanthus delavyii	60-90cm				1
S3.6	Escallonia 'Red Elf'	30-40cm	3L	4	4	15
	Osmanthus delavyii	60-90cm				1
S3.7	Cotoneaster microphyllus	30-40cm	3L	2.5	3	10
			Totals	**114**		**495**

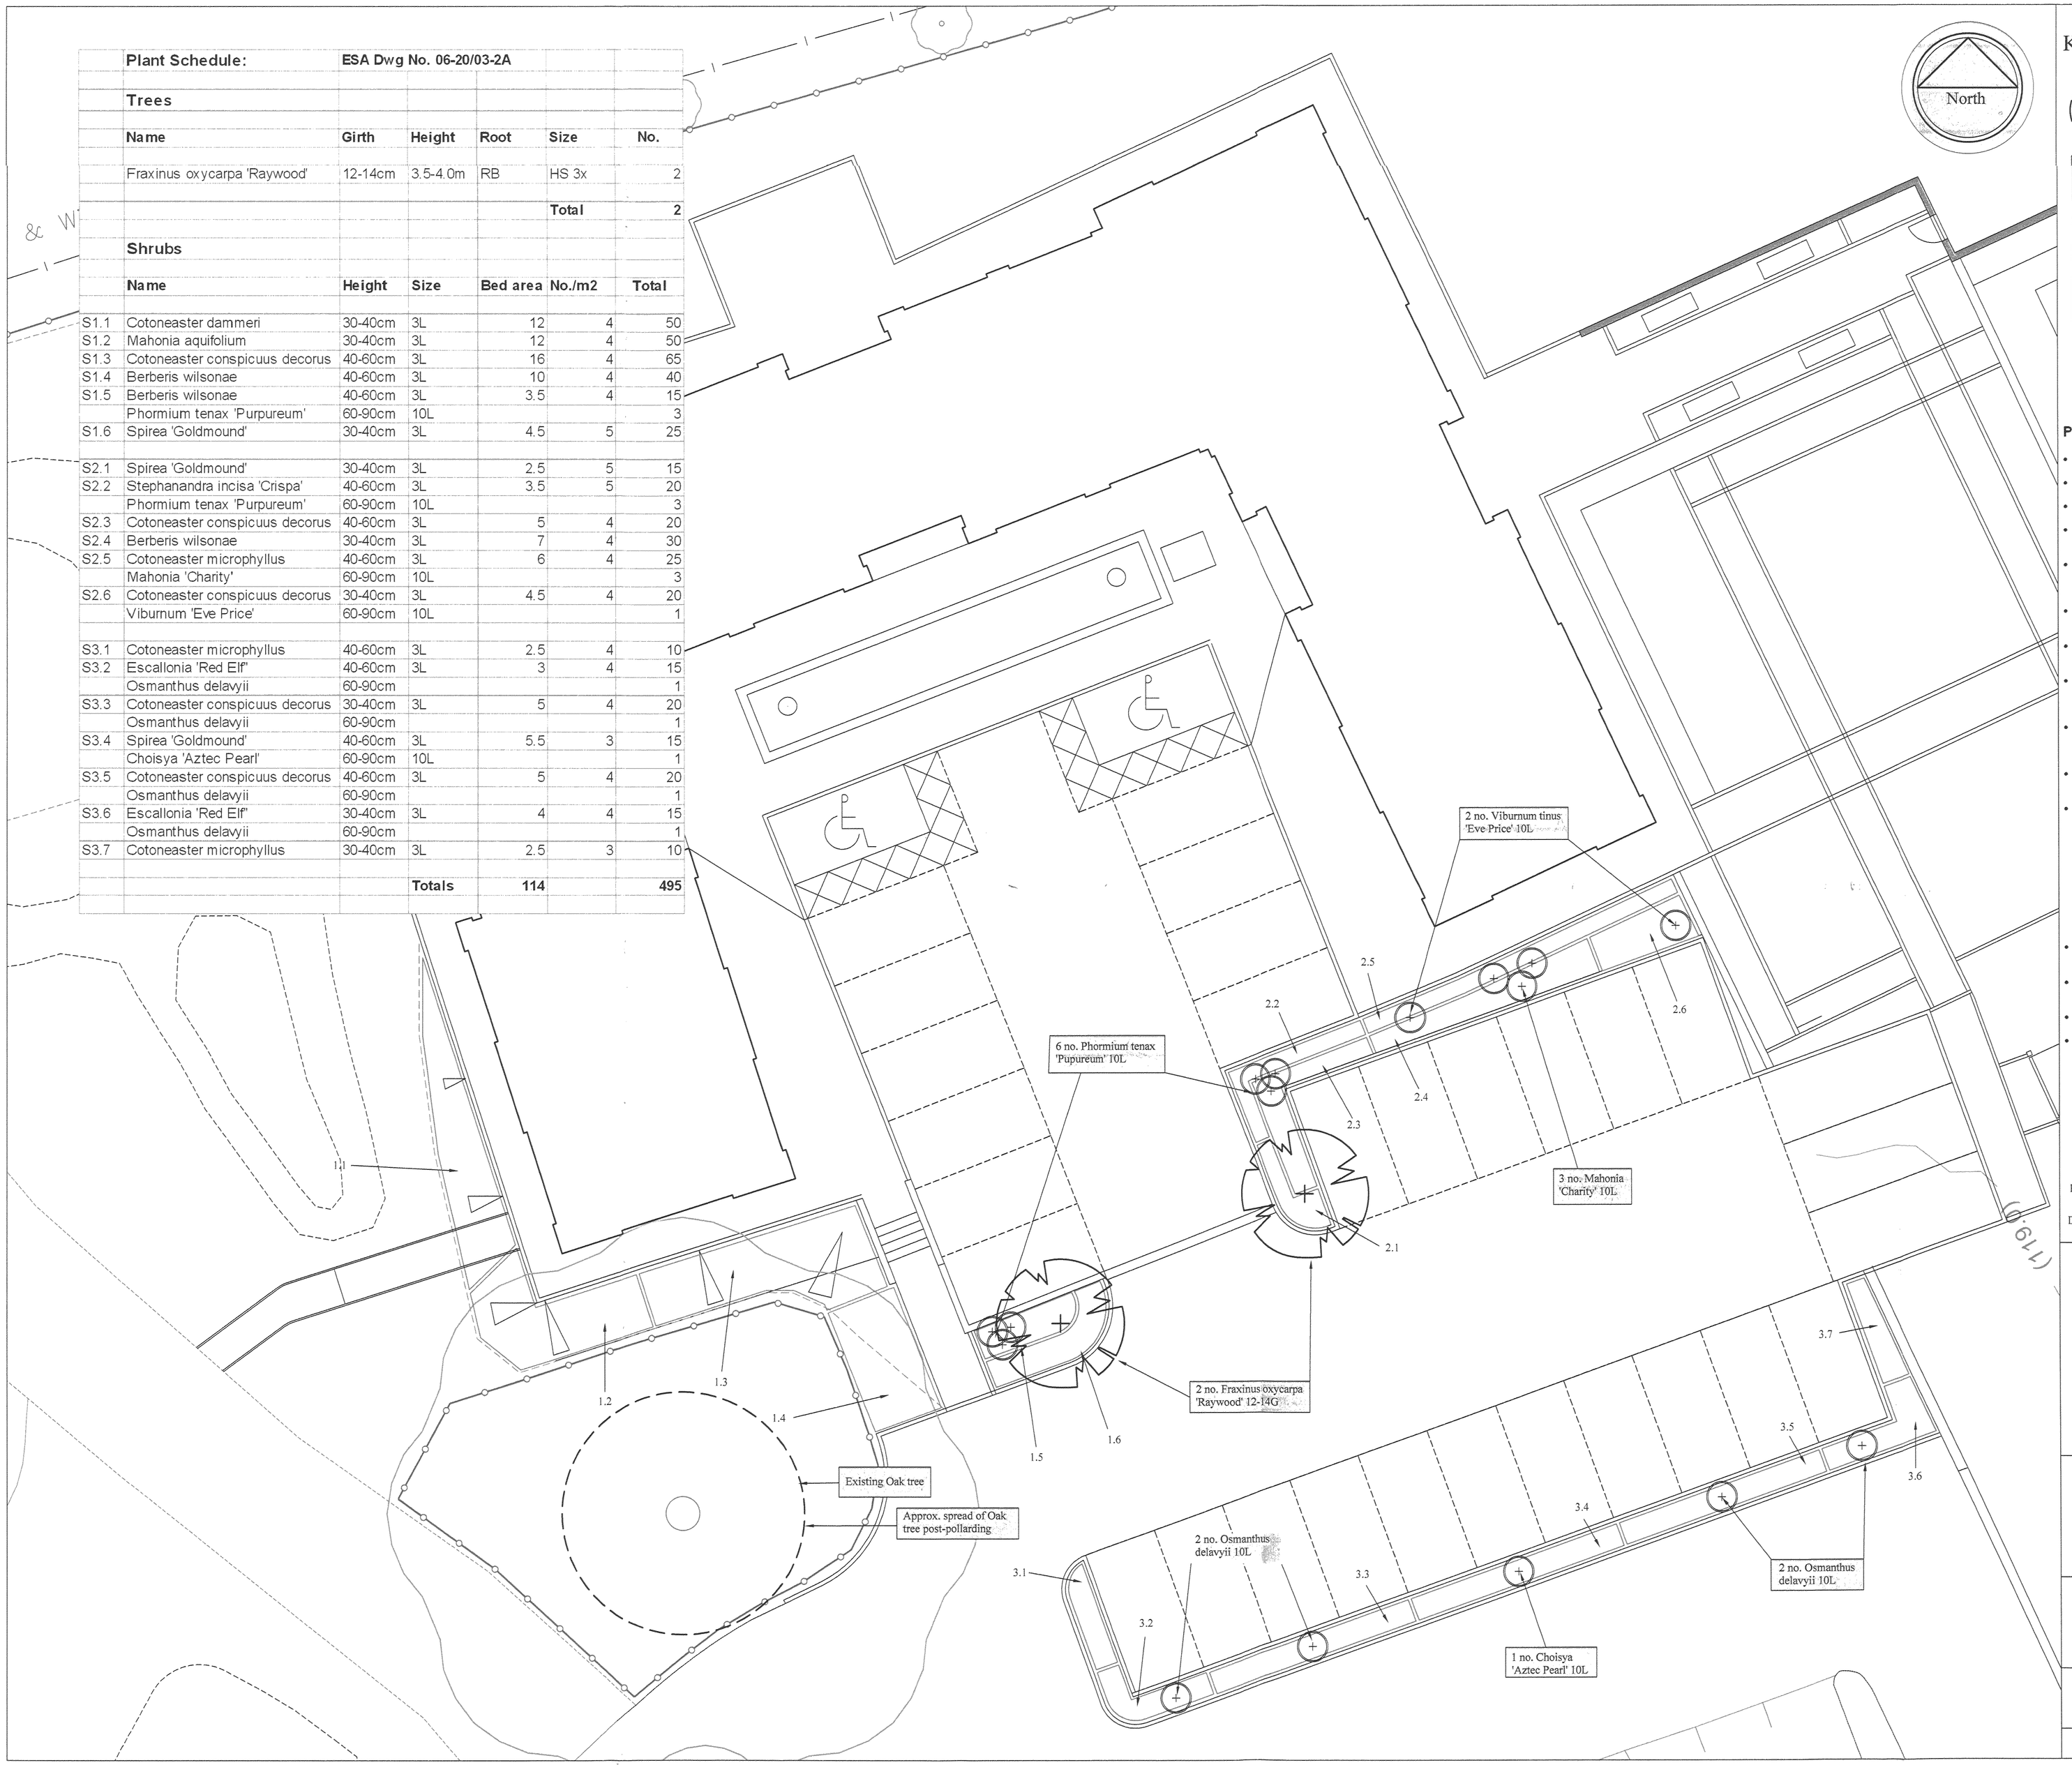

Key:

- Proposed HS tree 12 -14cm girth
- Specimen shrub 10L
- Climber 3L - fixed to training wires
- Shrub planting and bed no. (S1.1 / S1.2)

Planting Notes:

- All works to be in accordance with BS4428: Landscape Operations
- All areas to be CAT scanned for services prior to digging.
- Shrub beds to be topsoiled to a depth of 450mm.
- Approved soil improver (e.g. spent mushroom compost) to be incorporated into top 200mm of shrub beds at 1 cu.m. per 10 sq.m.
- Approved general fertilizer (e.g. 'Enmag' NPK 4-19-10) to be incorporated at 100g per sq.m. into top 100mm of soil prior to planting. Approved tree planting compost to be incorporated at 1cu m per 10 sq.m. prior to planting.
- Incorporate Broadleaf P4 polymer or similar approved product into top 100mm of bed before planting at the rate of 100g per sq.m.
- Except where stated all shrub planting to be 3L container grown stock, heights detailed in planting schedule, min 3 no. breaks.
- Tree pits for Semi-mature and HS trees to be 1.2 x1.2 x 0.75m deep, base of pit broken up to a further 200mm. Pits to be backfilled with topsoil/tree planting compost mix 3:1 ratio, plus 100g Enmag and 100g Broadleaf P4 per pit incorporated into backfill mix.
- Trees in planting areas to be double staked with 2 no. 2.1m long x 75mm dia turned, pressure treated softwood timber stake with 37mm wide heavy duty re-inforced rubber belting and 37mm flat-backed rubber block
- No species, varieties, sizes or positions to be amended without the Landscape Architect's prior approval.
- Semi-mature and HS trees to be supplied by any of the following Nurseries:

  Barcham Trees plc, Eye Hill Drove, Ely, Cambs., CB7 5XF. Tel: 01353 720748, Fax: 01353 720748

  James Coles & Sons, The Nurseries, Uppingham Road, Thurnby, Leics., LE7 9QB. Tel: 0116 241 2115, Fax: 0116 243 2311

  Hilliers Nurseries Ltd, Ampfield House, Ampfield, Romsey, Hants. SO51 9PA Tel: 01794 368733, Fax: 01794 368813

  Wyevale Hawkins, Thingehill Court, Withington, Hereford, HR1 3QG Tel: 01432 850433, Fax: 01432 850762
- All planting beds to be covered with 'Mypex' weedproof membrane prior to planting and to be mulched to 75mm depth with 15-125mm graded conifer bark flakes, <5% wood content.
- Existing grass areas to surrounds of buildings to be re-instated after construction as below. Any compaction to be relieved by deep cultivation to 200mm.
- All grass areas to have minimum 150mm topsoil to be cultivated to fine tilth.
- Areas to be grass seeded to be stone picked to remove any debris >50mm on general areas, >25mm on lawn areas. Pre-seeding fertilizer (BSH2.NPK 10:15:10) to be applied at 70g/sq.m. three days prior to seeding with BSH A22 low maintenance grass seed mix at 35g/sq.m. First cut at 75mm, cut down to 20mm.

Rev A 17/03/08 ES - Amendments to parking layout and adjacent planting areas

Do not scale from drawing - if in doubt ask

Ed Sharkey Associates

Landscape Architects and Environmental Consultants

49 Meadow Rise, Barton under Needwood, Burton upon Trent, Staffs, DE13 8DT
Tel/Fax: 01283 713124 Mobile: 07973 151820 E-mail: ed@edsharkey.demon.co.uk

Project

Shropshire Land Co. - Desford Hall, Leicester Lane, Desford, Leics. LE9 9JJ

App. No. 05/ 00573/ FUL

Drawing Title:

Landscape Proposals
Planting Plan 2 of 3

Planning Issue

Drawing No.	Rev	Scale	Date	Drawn	Chk
06-20/ 03-2	A	1:100@ A1	Nov '07	ES	

Computer File No. 2006\06-20\ESA\Planning\ESA-Desford-siteplanP1e.dwg