


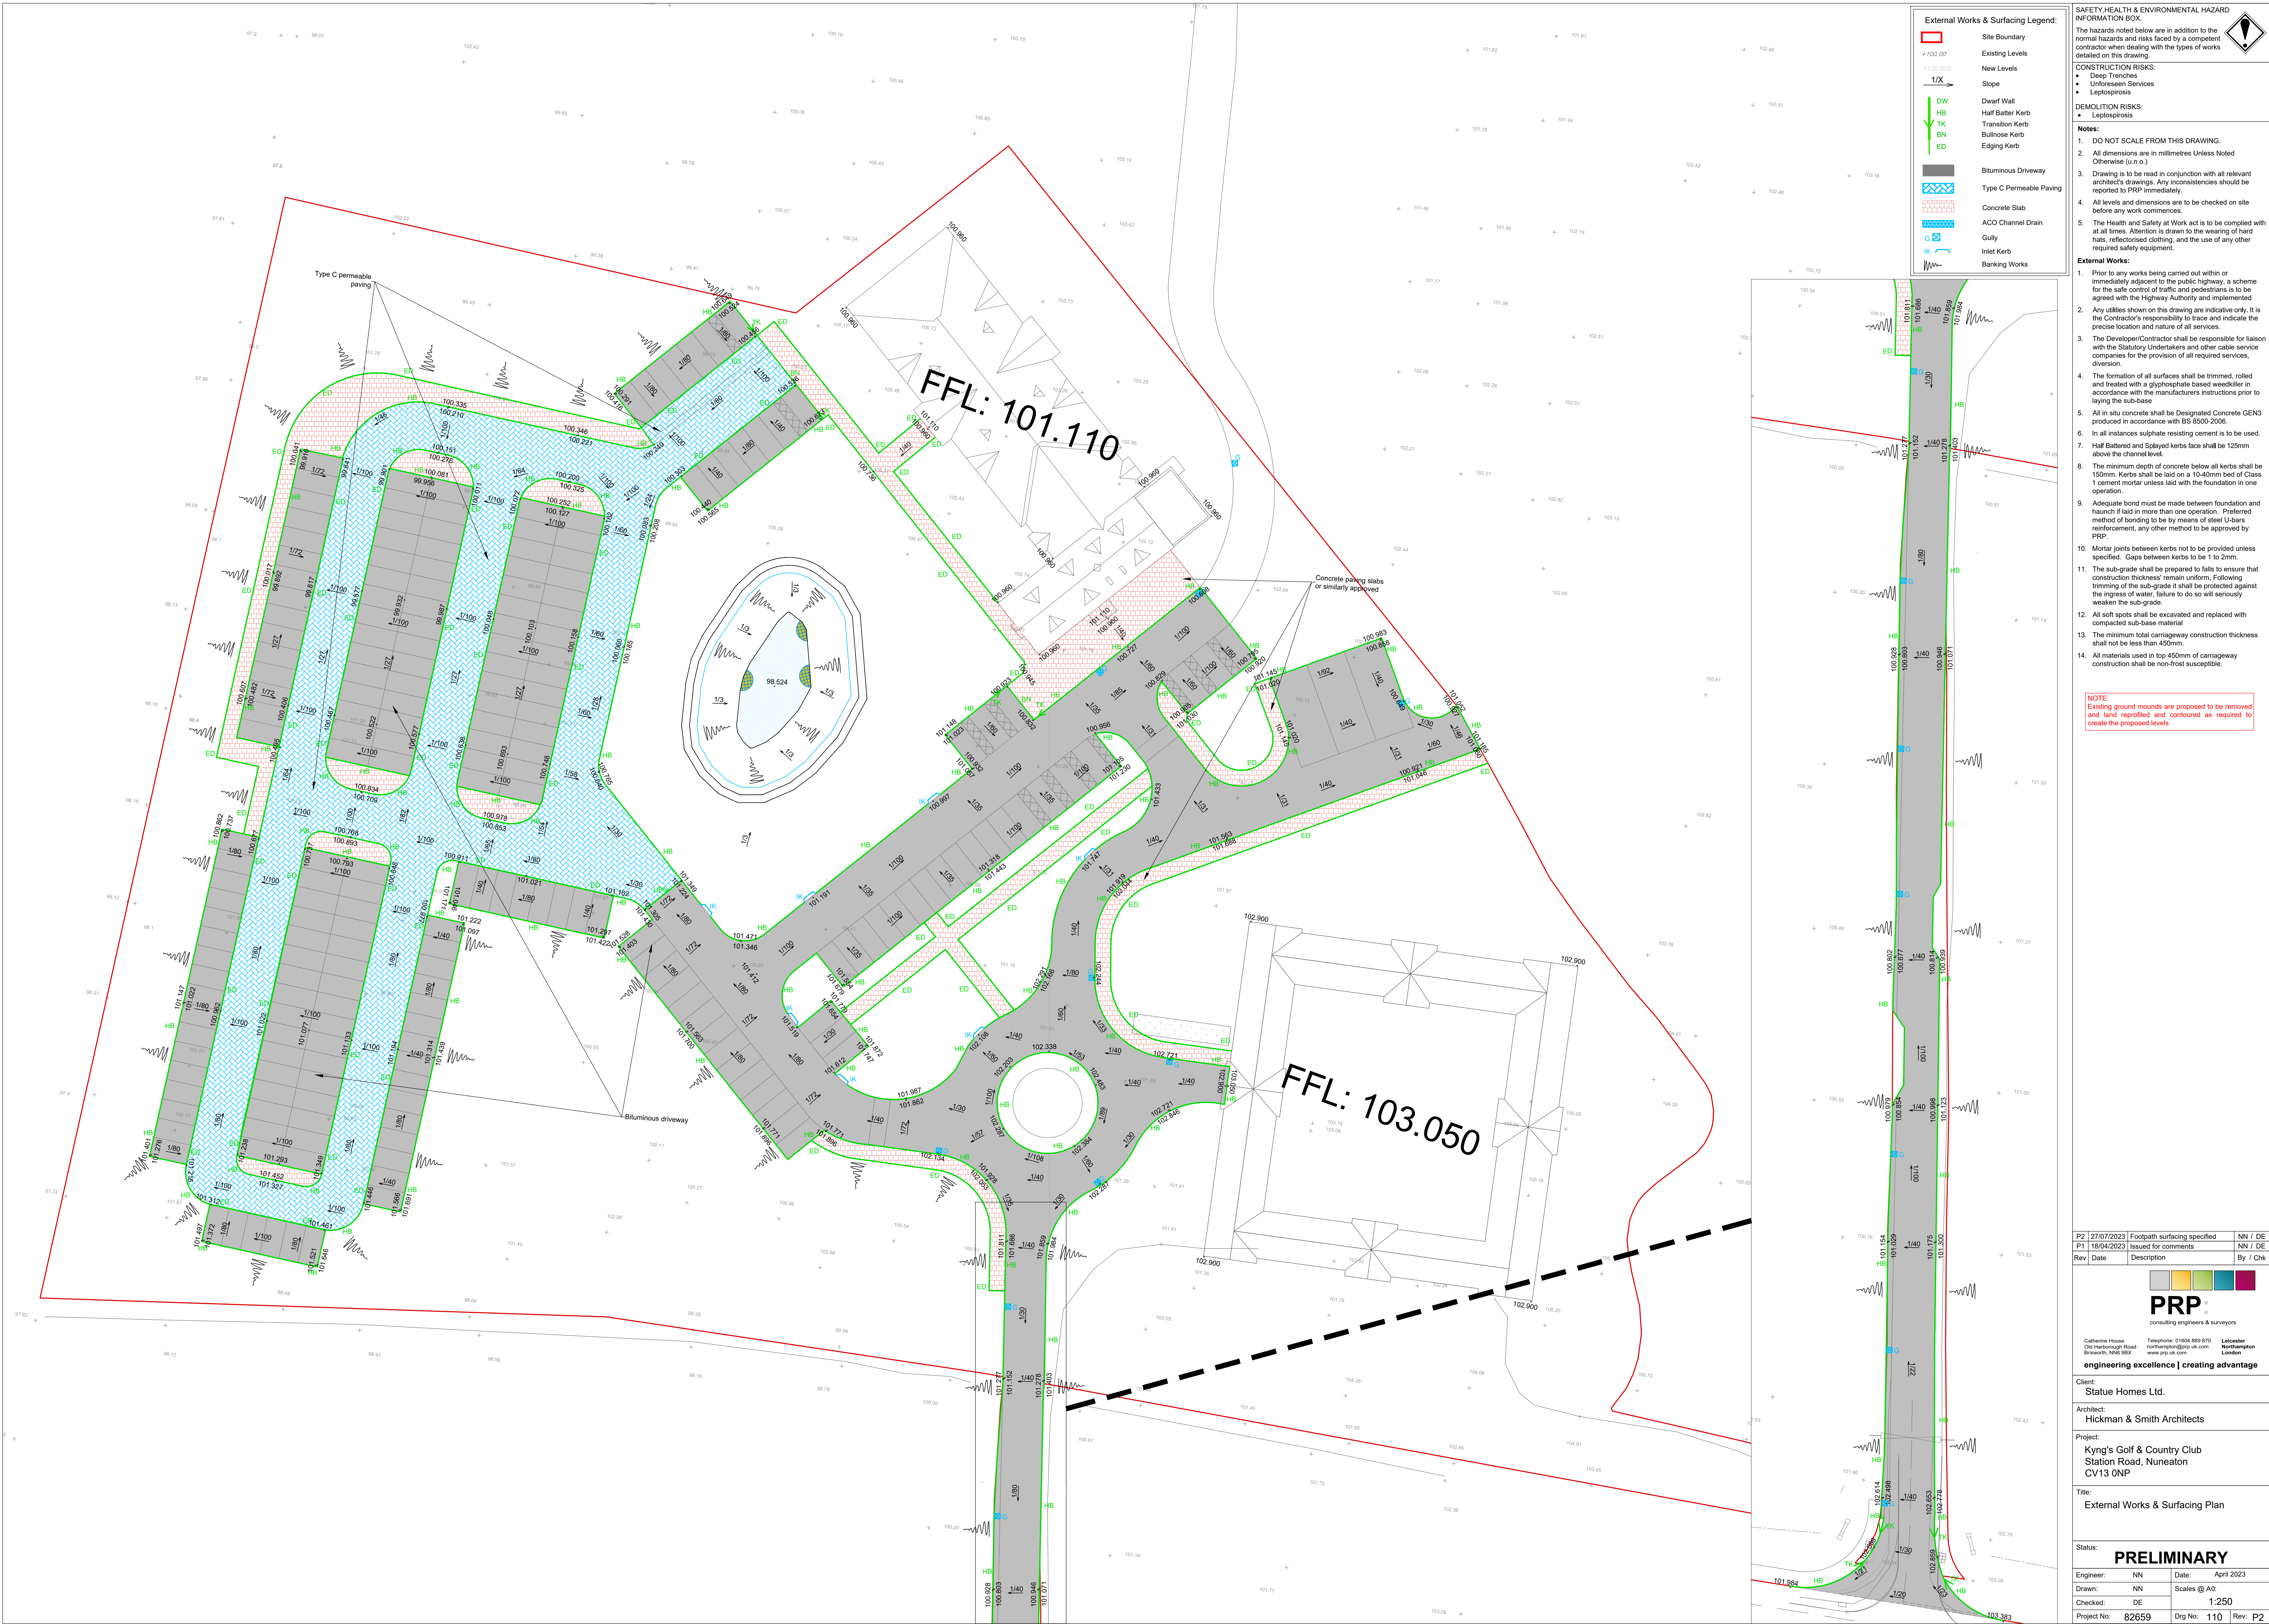

External Works & Surfacing Legend:

- Site Boundary
- Existing Levels
- New Levels
- Slope
- Dwarf Wall
- Half Batter Kerb
- Transition Kerb
- Bullnose Kerb
- Edging Kerb
- Bituminous Driveway
- Type C Permeable Paving
- Concrete Slab
- ACO Channel Drain
- Gully
- Inlet Kerb
- Banking Works

SAFETY, HEALTH & ENVIRONMENTAL HAZARD INFORMATION BOX.

The hazards noted below are in addition to the normal hazards and risks faced by a competent contractor when dealing with the types of works detailed on this drawing.

CONSTRUCTION RISKS:

- Unforeseen Services
- Leptospirosis

DEMOLITION RISKS:

- Leptospirosis

Notes:

- DO NOT SCALE FROM THIS DRAWING.
- All dimensions are in millimetres Unless Noted Otherwise (u.n.o.)
- Drawing is to be read in conjunction with all relevant architect's drawings. Any inconsistencies should be reported to PRP immediately.
- All levels and dimensions are to be checked on site before any work commences.
- The Health and Safety at Work act is to be complied with at all times. Attention is drawn to the wearing of hard hats, reflectorised clothing, and the use of any other required safety equipment.

External Works:

- Prior to any works being carried out within or immediately adjacent to the public highway, a scheme for the safe control of traffic and pedestrians is to be agreed with the Highway Authority and implemented.
- Any utilities shown on this drawing are indicative only. It is the Contractor's responsibility to trace and indicate the precise location and nature of all services.
- The Developer/Contractor shall be responsible for liaison with the Statutory Undertakers and other cable service companies for the provision of all required services, diversion.
- The formation of all surfaces shall be trimmed, rolled and treated with a glyphosphate based weedkiller in accordance with the manufacturers instructions prior to laying the sub-base.
- All in situ concrete shall be Designated Concrete GEN3 produced in accordance with BS 5500-2006.
- In all instances sulphate resisting cement is to be used.
- Half Battened and Splayed kerbs face shall be 125mm above the channel level.
- The minimum depth of concrete below all kerbs shall be 150mm. Kerbs shall be laid on a 10-40mm bed of Class 1 cement mortar unless laid with the foundation in one operation.
- Adequate bond must be made between foundation and haunch if laid in more than one operation. Prefixed method of bonding to be by means of steel U-bars reinforcement, any other method to be approved by PRP.
- Mortar joints between kerbs not to be provided unless specified. Gaps between kerbs to be 1 to 2mm.
- The sub-grade shall be prepared to falls to ensure that construction thickness remain uniform. Following trimming of the sub-grade it shall be protected against the ingress of water, failure to do so will seriously weaken the sub-grade.
- All soft spots shall be excavated and replaced with compacted sub-base material.
- The minimum total carriageway construction thickness shall not be less than 450mm.
- All materials used in top 450mm of carriageway construction shall be non-frost susceptible.

NOTE:
Existing ground mounds are proposed to be removed and land reprofiled and contoured as required to create the proposed levels

P2	27/07/2023	Footpath surfacing specified	NN / DE
P1	18/04/2023	Issued for comments	NN / DE
Rev	Date	Description	By / Chk

PRP
consulting engineers & surveyors

Catherine House
131 Haverhill Road
Barnet, Herts EN4 8JX
Telephone: 01804 889 870
enquiries@prp.co.uk
www.prp.co.uk

Leicester
Northampton
London

engineering excellence | creating advantage

Client:
Statue Homes Ltd.

Architect:
Hickman & Smith Architects

Project:
Kyng's Golf & Country Club
Station Road, Nuneaton
CV13 ONP

Title:
External Works & Surfacing Plan

Status:
PRELIMINARY

Engineer:	NN	Date:	April 2023
Drawn:	NN	Scales @ A0:	
Checked:	DE	1:250	
Project No:	82659	Dwg No:	110 Rev: P2

© copyright all rights reserved PRP UK Ltd 2010