

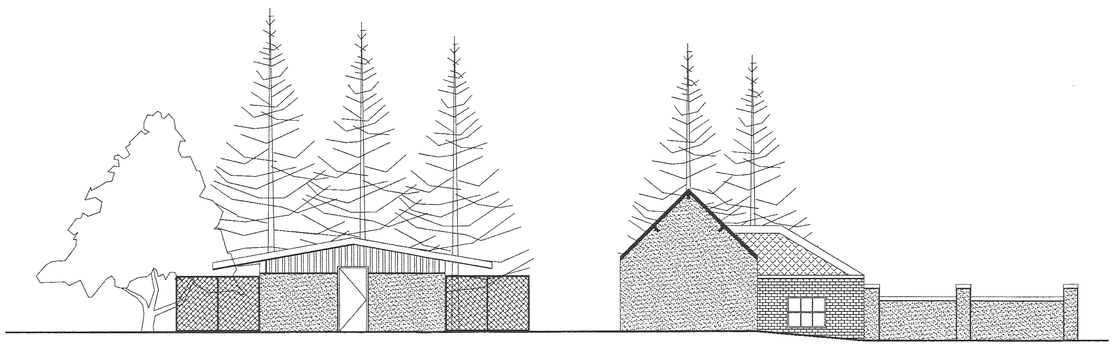



View on West Elevation - (1:100)

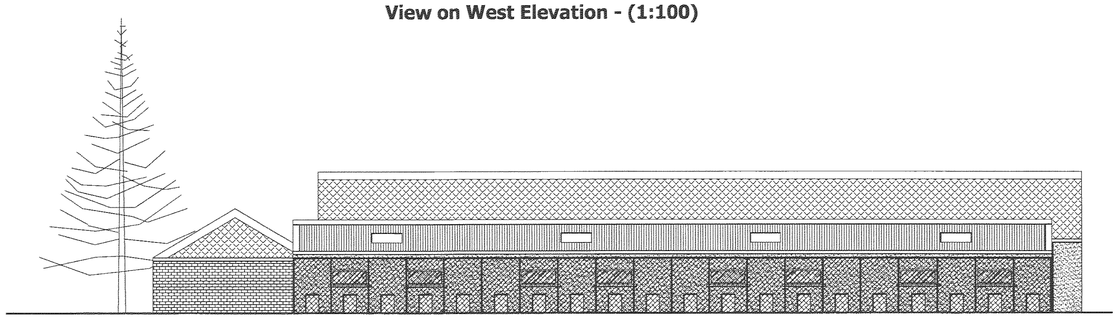


View on North Elevation - (1:100)

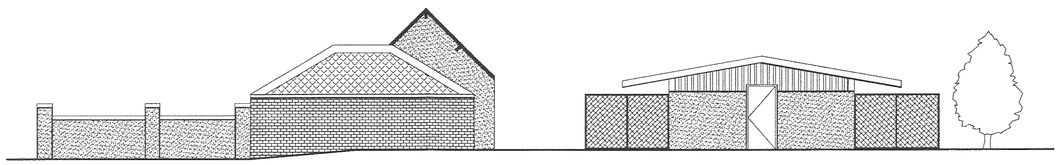

View on East Elevation - (1:100)

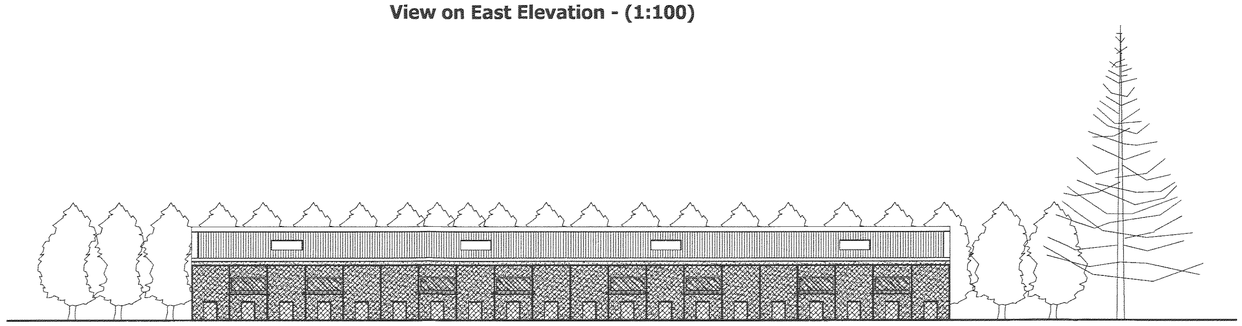

View on South Elevation - (1:100)

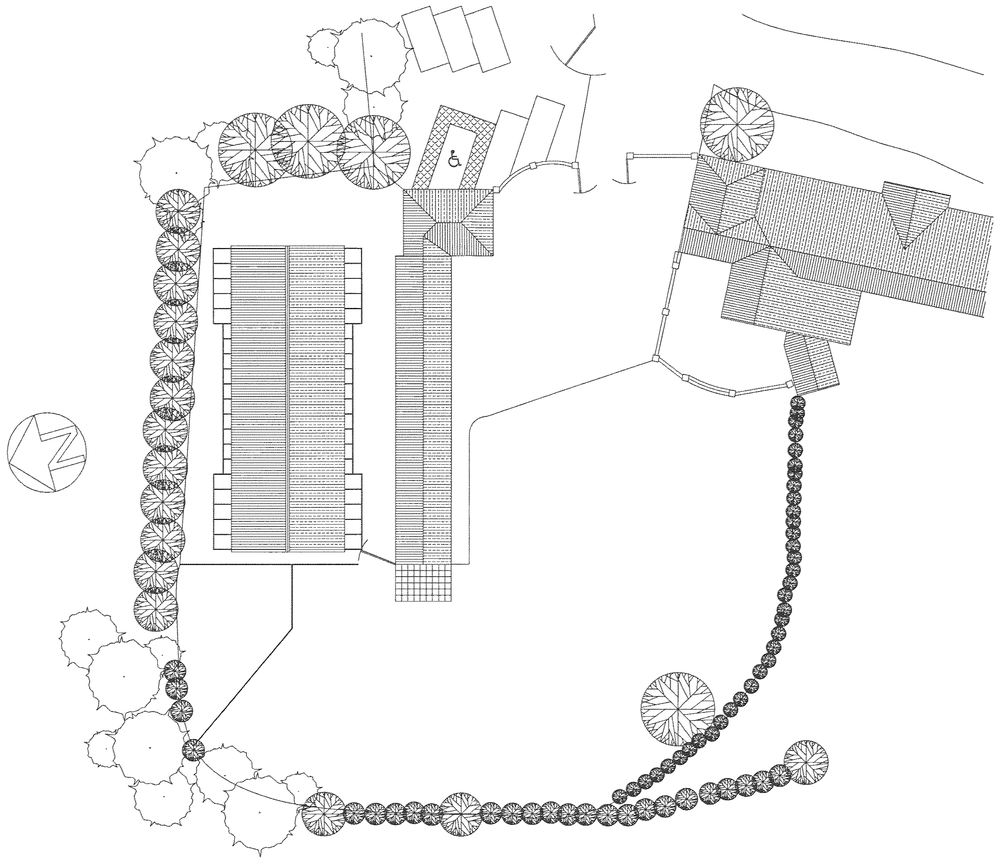

Site Plan - (1:250)
Showing proposed building obscured by extensive established existing tree planting and/or buildings to all sides

DEVELOPMENT SERVICES
28 NOV 2007
RECEIVED

Rev 'A' - 11/07
Details added of External Dog Runs & Specification for Dog Runs

Specification

Building Frame - To be designed in accordance with BS5950 Full Industrial Specification

Roof Sheeting - Plastic Coated box profile galvanised steel sheeting (Colour to be determined by Local Authority) allowing for Rooflights as shown

Vertical Cladding - Plastic Coated box profile galvanised steel sheeting (Colour to be determined by Local Authority) taken 600mm below eaves to all elevations as shown (obscured by canopy on side elevations)

Walls - Rendered single skin concrete block walls - Typical render finish (Paint finish colour to be determined by Local Authority)

Rainwater Goods - Black PVC guttering and rainwater pipes as required to both sides

External Dog Runs - All posts and head rail members will be manufactured from box section steel (SHS 40 x 40 x 2.5). The infil weld mesh panels will incorparate 50mm square holes using 12-14 guage material. All external Dog Run equipment will be approx' 1800mm high & hot dipped galvanised after fabrication

Rev.	Revision Description	Drn	Chkd	Appd	Date

ANTHONY CONSTRUCTION
(ERECTING & CLADDING SPECIALISTS) LIMITED
7 Bayleaf Crescent, Oakwood, Derby. DE21 2UG
Tel: 01332 820 119 - Fax: 01332 820 179
e-mail: Anthony_construction@hotmail.com

© Copyright

Client:
Mr J Vero
Merrylees Farm, Merrylees Road,
Desford, Leicester
LE9 9FE

Project:
Proposed Building for Kennels

Title:
Elevational Views to support Planning Application

Drawn by:	Designed by:	Checked:
Anthony Const.	Anthony Const.	
Date:	Index No.:	Approved:
October 2007		

Scales: 1:250/100 @ A1

Drawing No: AC/1867/003

Revision: A