





Key Reference Plan

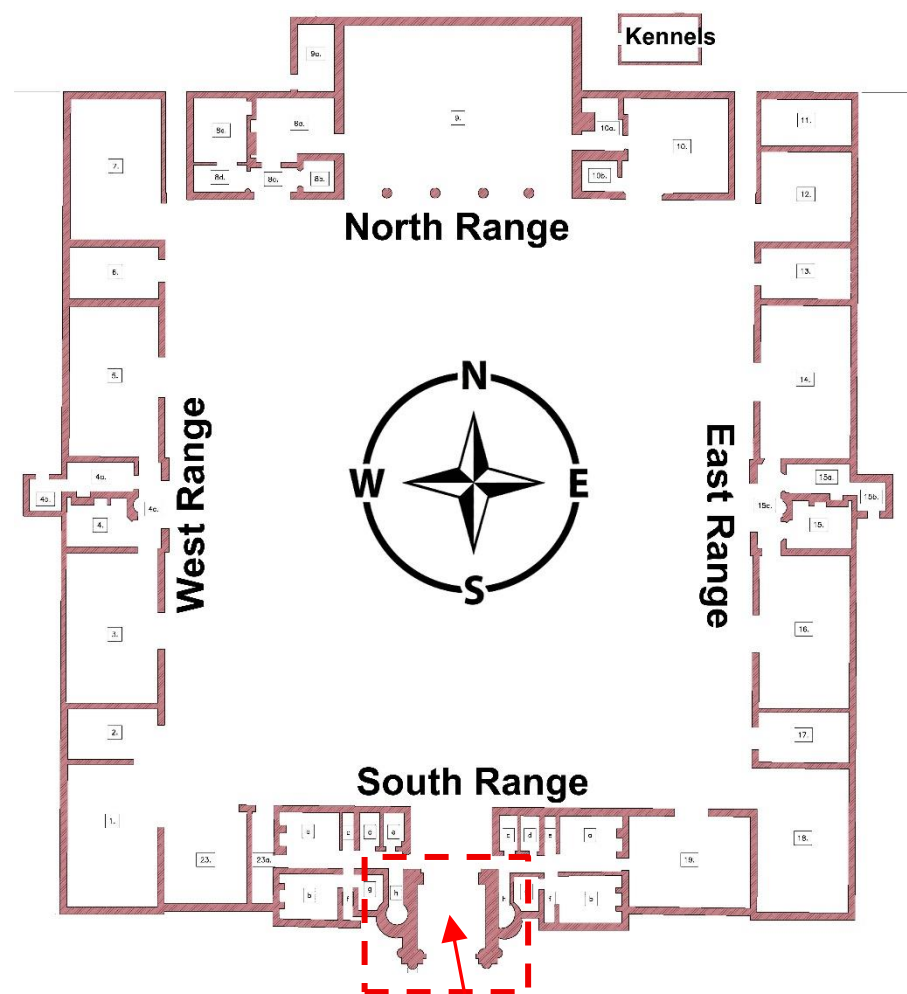

View of Timber Cupola from Above

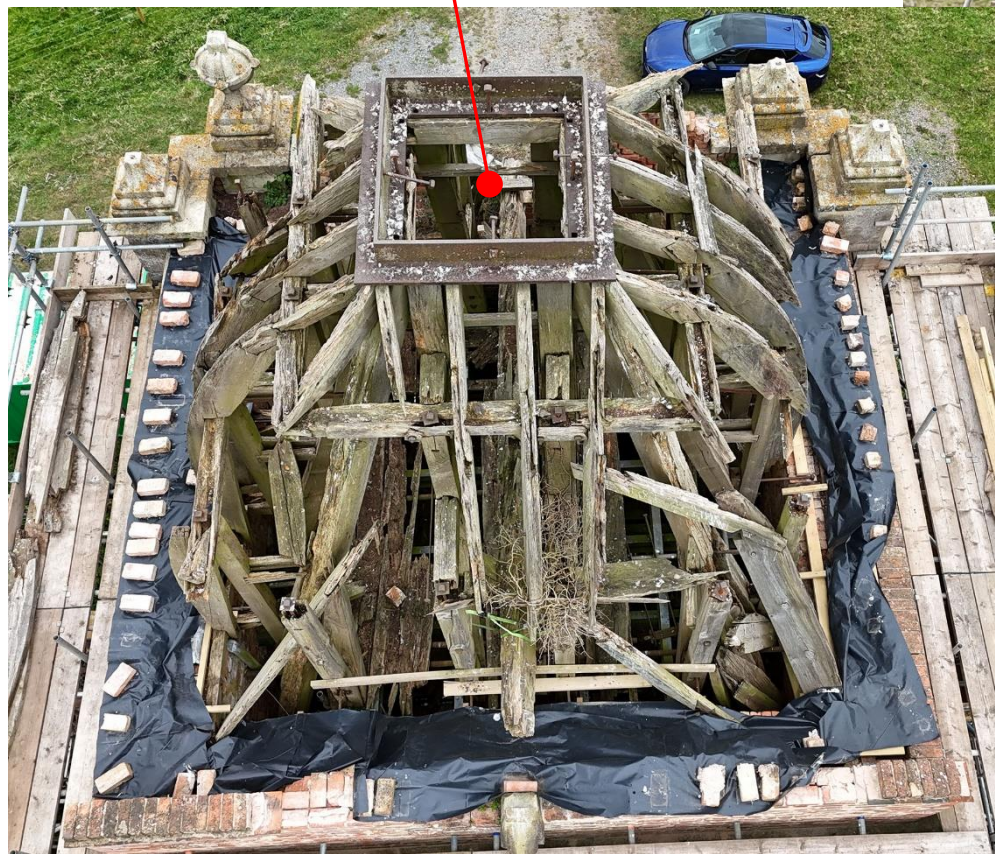

View of Timber Cupola to be Dismantled and Set Aside for Reuse

Contractor to allow for carefully dismantling and setting aside for subsequent reinstatement. All elements to be clearly labelled using approved referencing system involving laminated A6 size labels with numbering clearly cross referenced to master survey drawings of cupola. No timber elements to be removed from site.

NOTES:-
Contractor to allow for access scaffold or trestles to facilitate works as required and all associated design of temporary works.

Contractor to allow for providing method statements and risk assessments for the works to project Principal Designer for approval.

Contractor to allow for preparing mortar sample for approval of pointing detail by CA/conservation officer where required.

The timber elements forming the tower cupola are being temporarily removed from the building under the conditions of Hinkley and Bosworth Borough Council Listed building application 25/00423/LBC.
The consent for removal requires these timber elements to be retained on site in a dry and ventilated condition for subsequent repair and reinstatement.

REV	DESCRIPTION	BY	DATE
P1	Preliminary Issue	JNA	Jul25

Project
Bradgate Stables
Groby
Leicestershire

Title
Timber Cupola
Urgent Protection Works
Key Plan



Mann Williams
Consulting Civil And
Structural Engineers
7 Old King Street, Bath, BA1 2JW
T 01225 464419
e bath@mannwilliams.co.uk

Drawn	Chkd	Size	Scale	Date
JNA	IB	A3	nts	Jul 25
STATUS Preliminary				
Project 11769	Drawing 01	Rev P1		