
All Intellectual Property Rights (including copyright) in or arising out of this drawing and the building works depicted are owned by Pegasus Planning Group Ltd (Pegasus Group) and may not be reproduced and/or copied without a written licence. Pegasus Group accepts no liability for any use of this drawing other than for its original purpose and by the original client except in circumstances where approval for use has been supplied by Pegasus Group in writing. Use only written dimensions. Drawing prepared for planning application purposes only. Do not scale (or use) for construction, sales or any other purpose. Any queries to be reported to Pegasus Group for clarification. © Pegasus Planning Group Limited. © Crown copyright and database rights OS 100042093. Promap Licence number 100020449. EmapSite Licence number 0100031673. Terms & Conditions @ pegasusgroup.co.uk

N

1:100 0 5m 10m

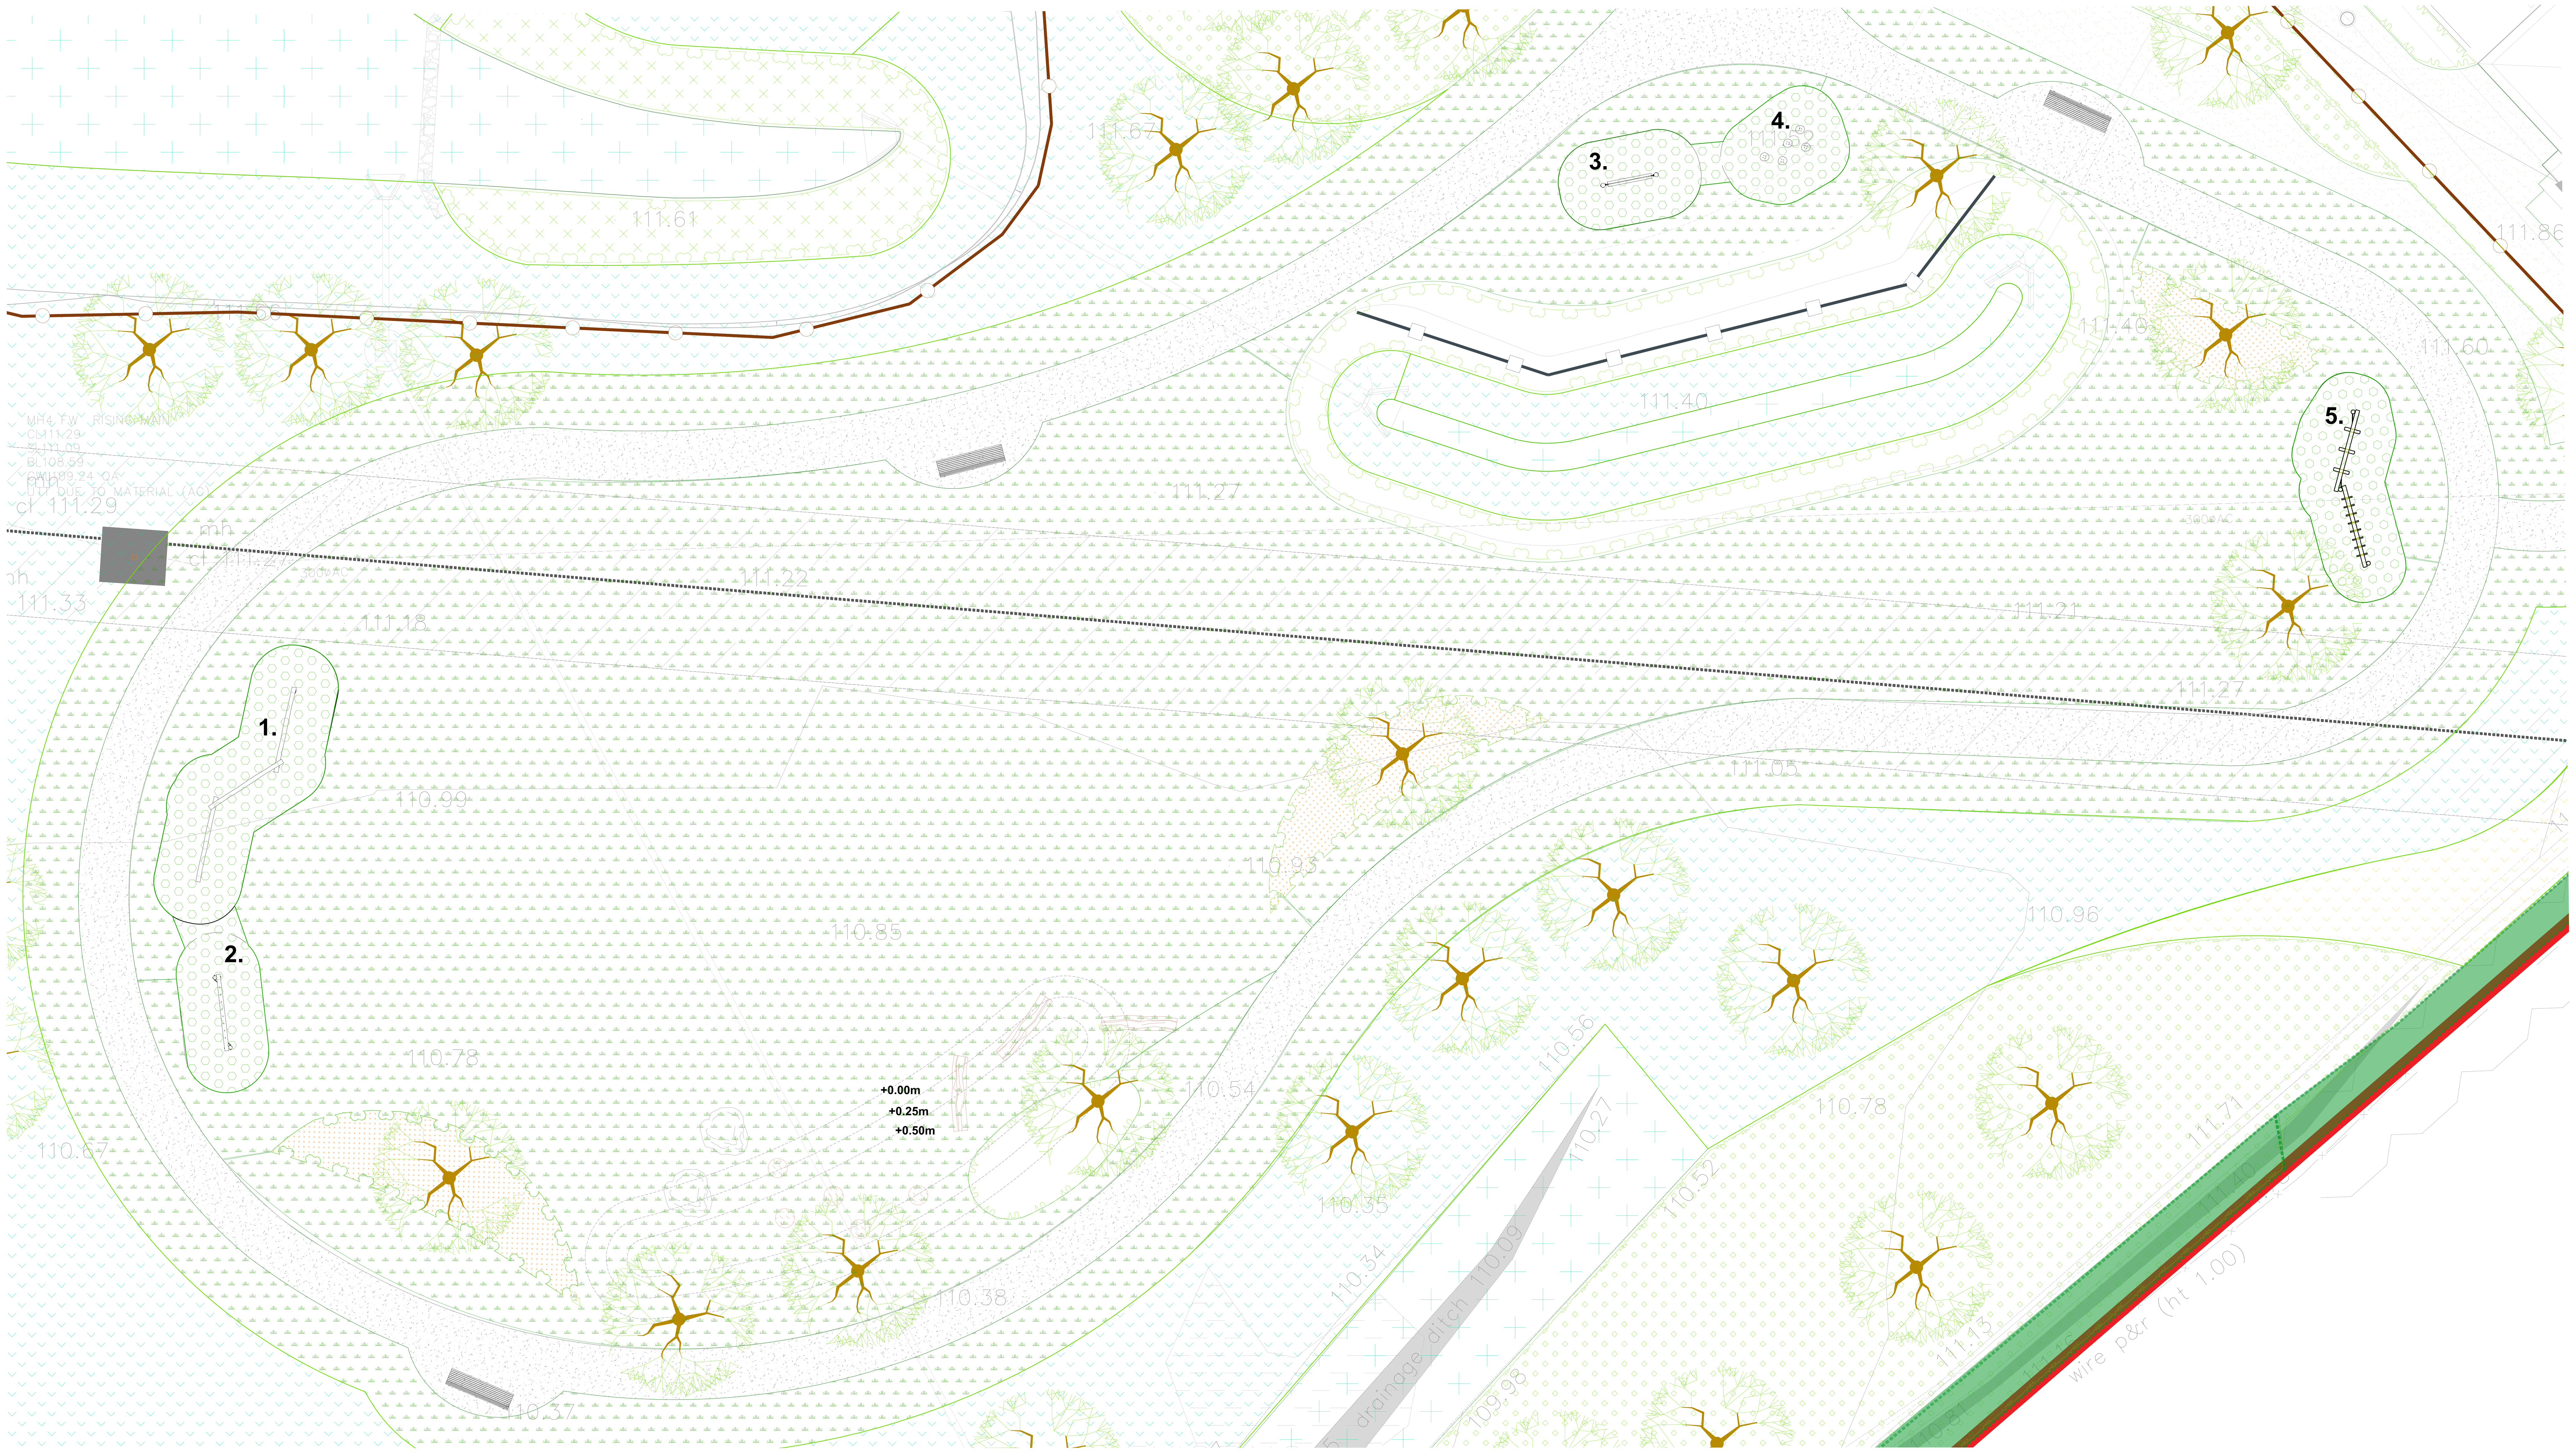

KEY - TRIM TRAIL

Site boundary

Tarmacadam surfaced footpath
Tarmacadam surface with pcc edging.

Reinforced grass safety surfacing
Play manufacturers to detail in accordance with EN 1176 & 1177. Safamat surfacing 'SMS', as supplied by Streetscape Products & Services or similar approved.

Proposed ground contouring
Topsoil shall be spread evenly over the formation levels in layers not exceeding 150mm to a depth of 150mm for grass. All slopes shall be graded with a rigid blade grader and consolidated to proposed levels. The gradient of the slopes shall be smooth-flowing, no steeper than 1:3 and marrying with all existing levels.

Natural boulders - informal seating
Caledonian play boulders, varying sizes maximum 600m above ground level. No sharp edges and selected for play in mind. Naturally slip resistant. Installed to supplier's recommendations.


Fallen tree trunk and stepping logs/ stumps
Soft wood tree trunk (for seating and clambering) to be trimmed and prepared for use by public (removing all bark). Supplied by Playdale Ltd or similar approved play manufacturer. Vertical tree trunk posts varying in height up to 1.2m to be trimmed and prepared for use by public. To be installed within concrete footings (GEN 2). Supplied by an approved play manufacturer.

Play equipment schedule

1. **Triple Balance Beam (NRO804)**
Robinia balancing unit, supplied by Kompan or similar approved play manufacturer.
2. **Dynamic Bar (NRO830)**
Robinia balancing unit, supplied by Kompan or similar approved play manufacturer.
3. **Robinia Vertical Climbing Net (TBR7150)**
Timberbuilt equipment, supplied by Miracle Design & Play or similar approved play manufacturer.
4. **Caterpie Robinia Stepping Posts (TBR7146)**
Timberbuilt equipment, supplied by Miracle Design & Play or similar approved play manufacturer.
5. **Combo 8 (CMB/8/S)**
Timberbuilt equipment, supplied by Playdale or similar approved play manufacturer.

All play equipment and layout proposals to be specified in accordance with the requirements set out under BS EN 1176, 1177 and Equality Act 2010. Following the agreement of play equipment and the general arrangement the selected manufacturer's details will be submitted to the local council for approval along with the finalised proposals and accompanying certificates and details.

Sheet location plan (NTS)

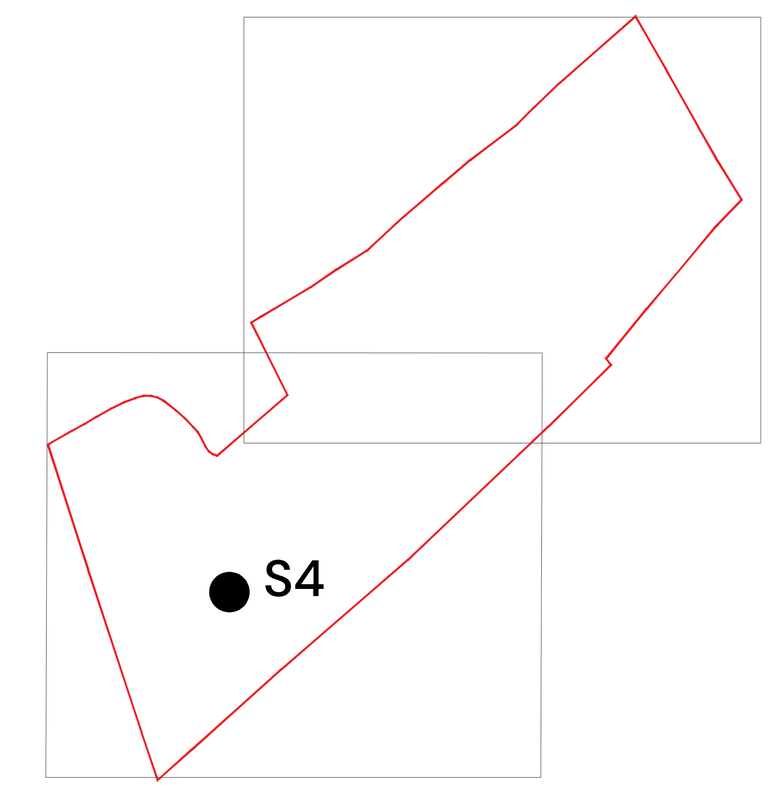




1. Triple Balance Beam
Play Enrichment: Balancing, social
Age group: 3-12 years
Supplier: Kompan or similar approved



2. Dynamic Bar
Play Enrichment: Balancing, hang in arms, pulling, rotating, social
Age group: 6-12 years
Supplier: Kompan or similar approved

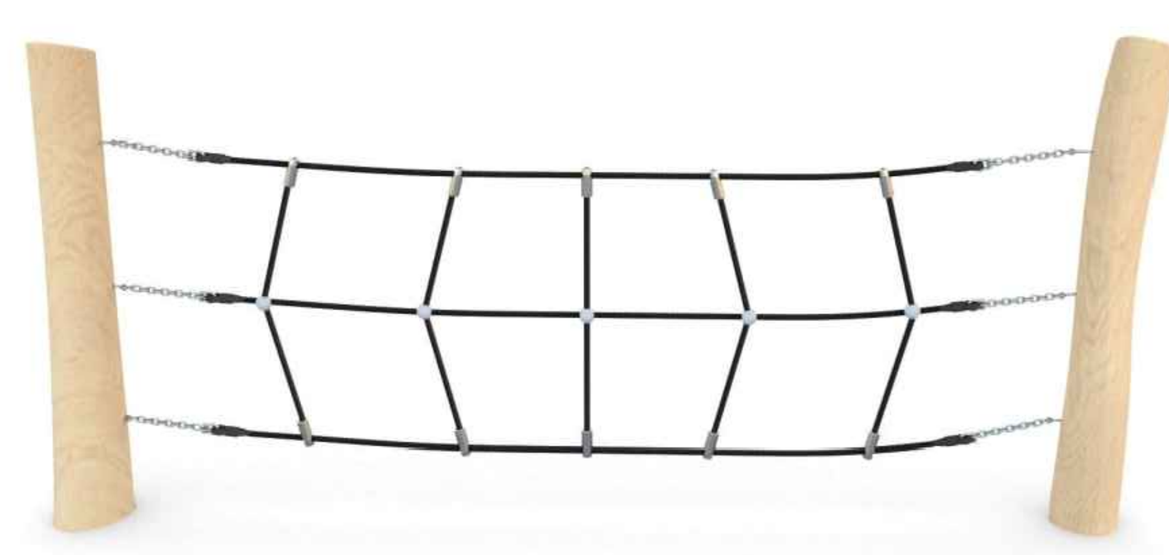

3. Robinia Vertical Climbing Net
Play Enrichment: Climbing, sensory, social
Age group: 3-12 years
Supplier: Miracle Design & Play or similar approved



4. Caterpie Robinia Stepping Posts
Play Enrichment: Balancing, social
Age group: 3-12 years
Supplier: Miracle Design & Play or similar approved manufacturer



5. Combo 8
Play Enrichment: Balancing, agility
Age group: 6-14 years
Supplier: Playdale or similar approved manufacturer



Stepping Logs and Boulders



Boulders

REV	DATE	DESCRIPTION	REVISED BY	APPROVED BY
A	26.08.26	Addition of trim trail equipment	BR	AP
-	23.07.26	First Issue	HA	AP

Woodhouse Lane - Burbage - Trim Trail Proposals

PEGASUS GROUP

I PEGASUSGROUP.CO.UK I TEAM/DRAWN BY: HA I APPROVED BY: AP I DATE: 27.07.2026 I SCALE: 1:100@A0 I DRWG:P25-2857_EN_0002_S4_REV A I CLIENT: Cameron Homes I