
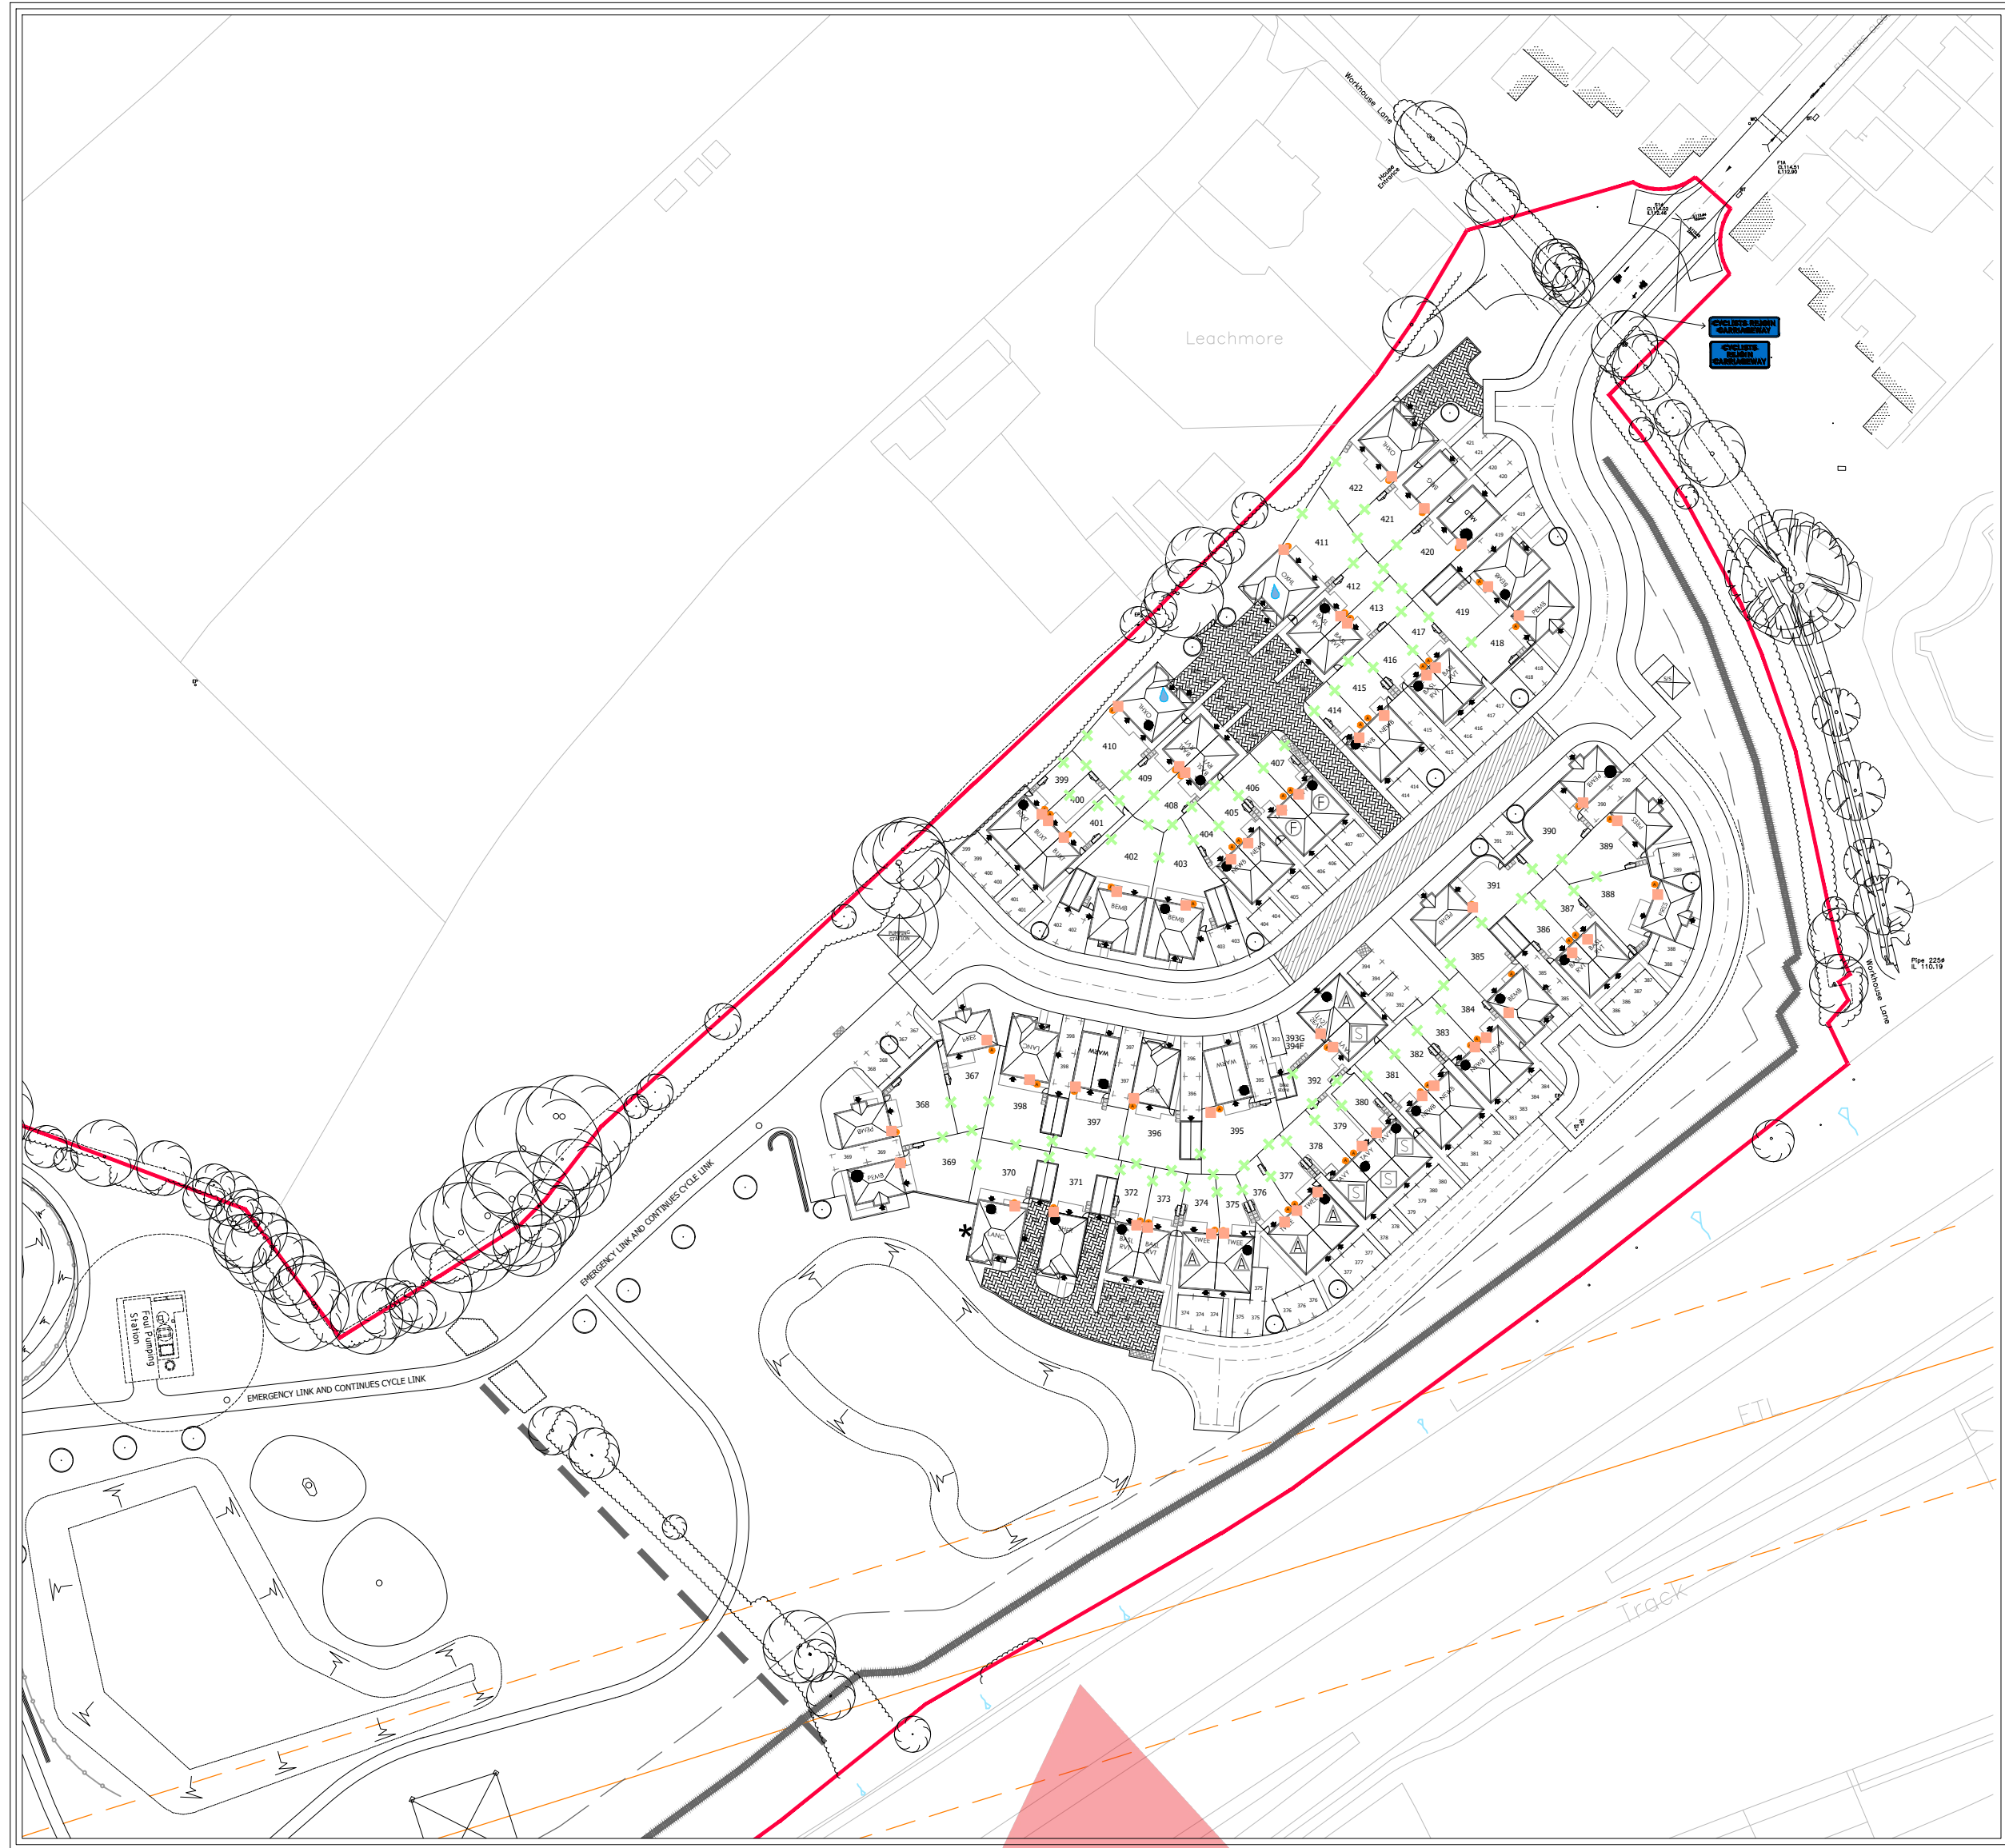


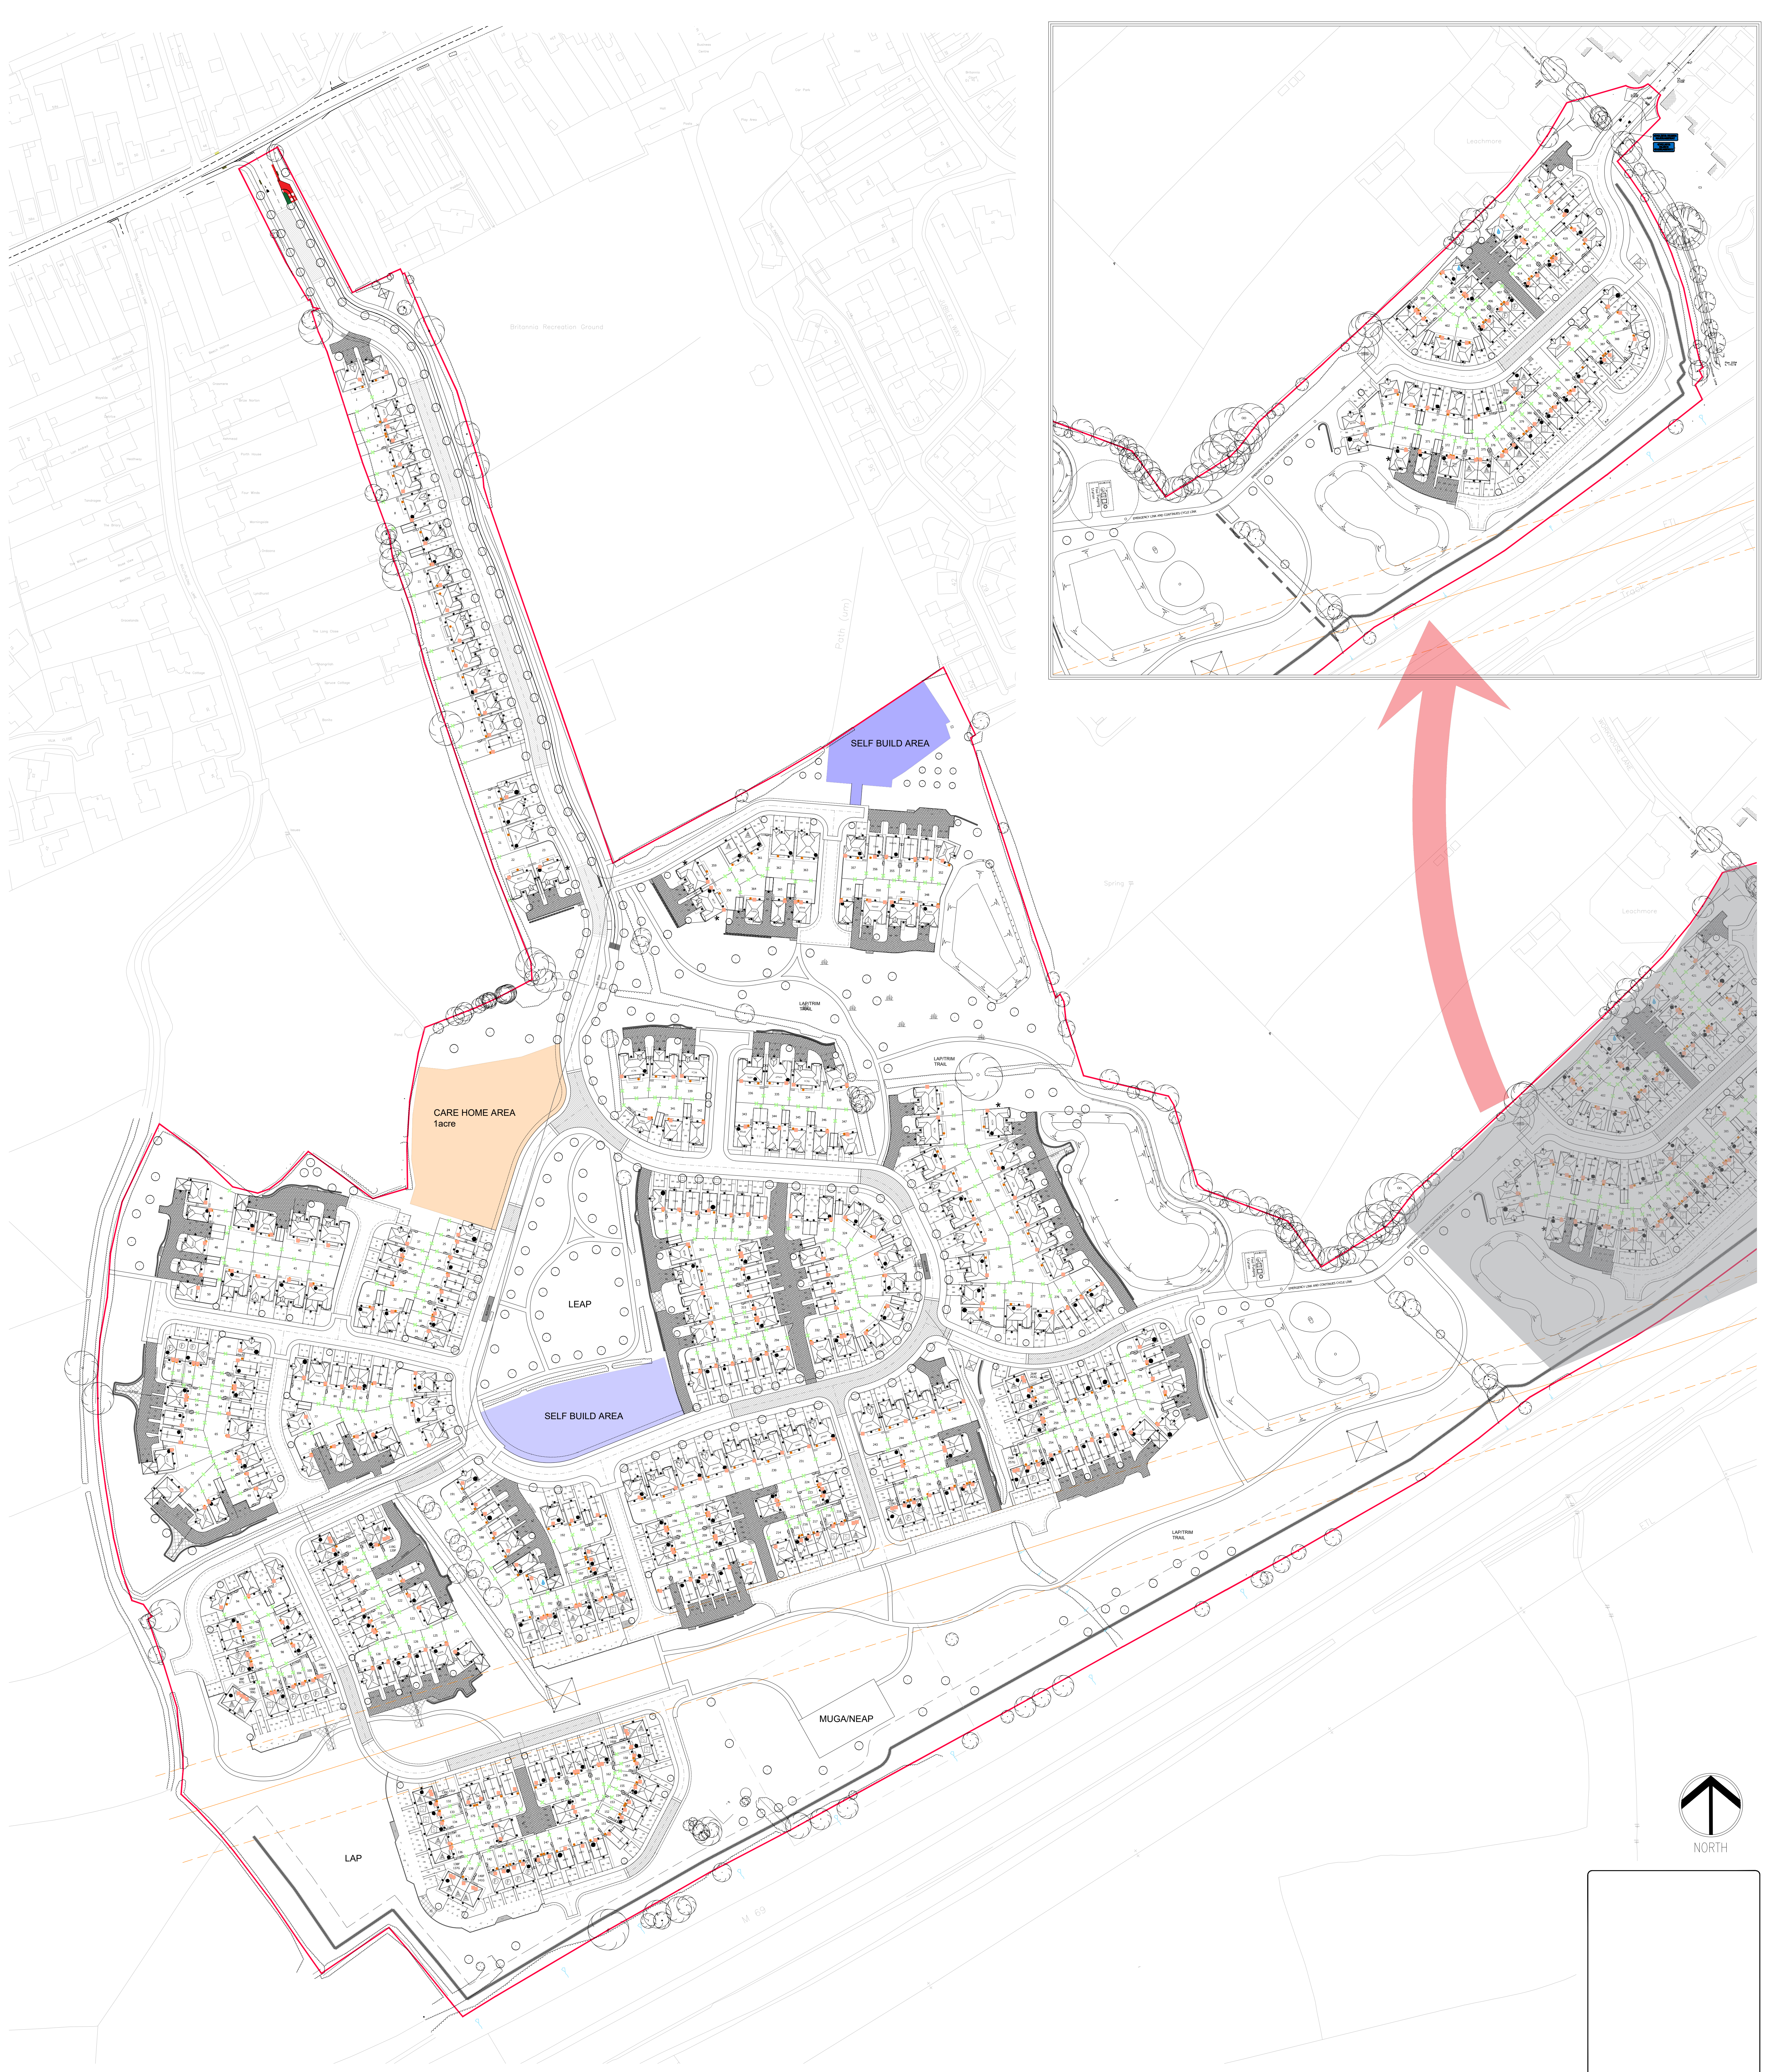

- KEY
- Hedgehog Highway
 - Bat Box
 - Bird/ Swift Boxes

Requirements of Swift Bricks:
- Cannot be placed above windows, doors, or ducts
- The boxes should have shade for parts of the day
- Nests must be above 4.5m in the air
- The bricks can be placed under the eaves
However if they are not then, they need to be fitted with a cavity tray
- Flight path needs to be unobstructed by other buildings
- Multiple bricks can be put on one plot but they must be at least 1 meter apart
- Detail on Integral Bird Box Details - Sheet 2 of 2 - Houses (reference EG-M2008)
- Details for Bird Boxes found on EG-M2007, EG-M2008, and EG-M2009

Revision Date Amendment Initials	
Drawing Status: PRELIMINARY PLANNING CONSTRUCTION	
Development: LAND SOUTH OF BURBAGE	
Location: BURBAGE	
Marking Name: BAT BOXES, BIRD BRICKS, AND HEDGEHOG HIGHWAYS	
Drawing Number: 1693-08-02-100	
Revision: DL	Scale: 1:1000
Drawn by: DL	Date started: OCT 23
Checked by:	Date:

Redrow Homes Midlands
Redrow Homes, Bristol Green, Walscott, Tamworth
Buffershire B77 5PA
Tel: 01827 260600 Fax: 01827 262454 Web: www.redrow.co.uk

Legal Disclaimer: This layout has been designed after due consideration of our Context & Constraints Plan

LAND SOUTH OF BURBAGE, BURBAGE - BATS BOXES , BIRD BRICKS, AND HEDGEHOG HIGHWAYS