





Double sided non-ferrous 2mm aluminium free standing monolith 4910mm x 1560mm x 300mm deep overall powder coated one std RAL colour, mounted to both sides of steel structure folded aluminium panels 4910mm x 1270mm x 100mm deep returns landscape coated RAL 7016 Grey stain with folded aluminium backtracks to suit RAL 7016. Panel mounted on one side folded/fabricated slotted rim/return 2mm aluminium logo coated one std RAL colour, 5mm open 050 acrylic face with translucent digitally printed vinyl detail applied and built up. 3mm aluminium backtracks with lugs to support acrylic faces coated one std RAL colour outside only with white LED face illumination. Panel mounted to one side built up flat faced 2mm aluminium letters coated one side std RAL colour, 4mm open makrolon sunken backtracks fitted with half bracket fixings with rear spacers, internal halo white LED illumination 940nm high with 80mm returns 'LADI'. Internal support structure, baseplates and flat cut aluminium shroud all coated one std RAL colour and ground fixing cages to suit.

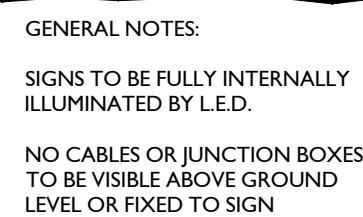

A diagram showing a horizontal assembly. At the top, there are three stacked rectangular blocks. Below these blocks is a long horizontal bar. Underneath the bar, there are five rectangular blocks of varying lengths. The leftmost block is labeled 'powder' and has an upward-pointing arrow below it. The other four blocks are positioned to the right of the powder block.

WOOD ROAD SIGN I- FRONT ELEVATION scale 1:20

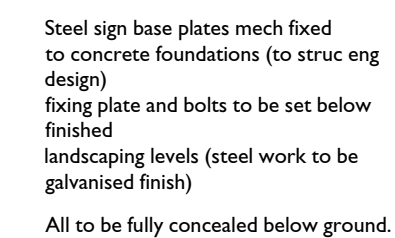

Web : www.stoosarchitects.co.uk