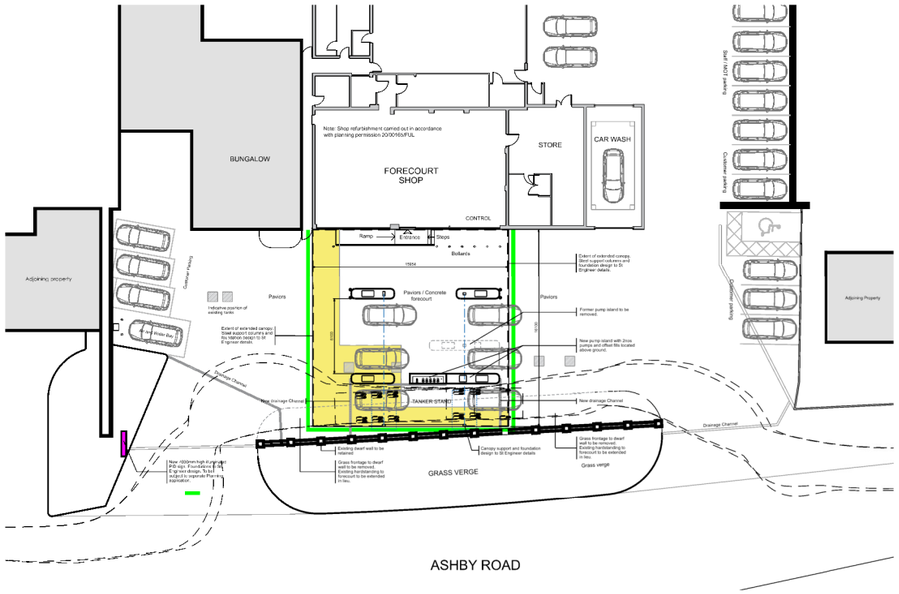



Proposed new fascia signage

Proposed 7000mm high Totem sign

NOTE: All signage to be removed and installed on site to be carried out by specialist sign manufacturer

Site Plan 1:500

0m 5m 10m 15m 20m

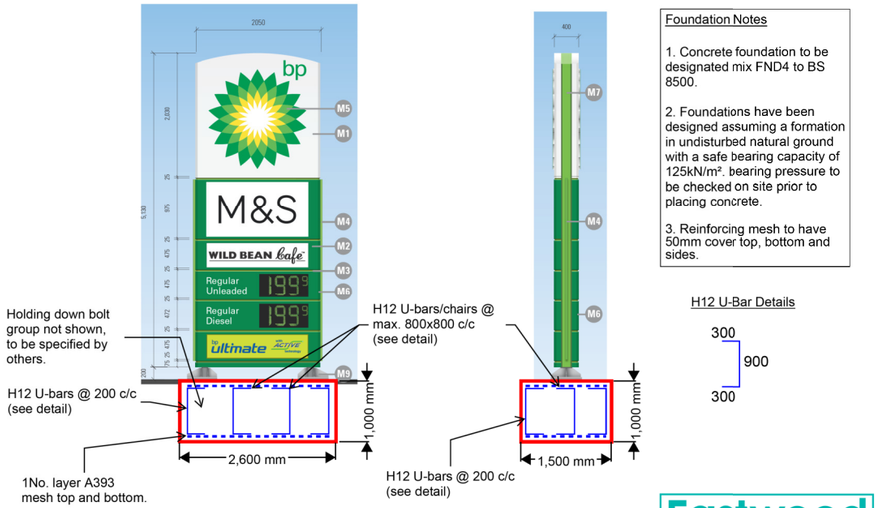

Foundation Notes

1. Concrete foundation to be designated mix FND4 to BS 8500.


2. Foundations have been designed assuming a formation in undisturbed natural ground with a safe bearing capacity of 125kN/m². bearing pressure to be checked on site prior to placing concrete.

3. Reinforcing mesh to have 50mm cover top, bottom and sides.

H12 U-Bar Details

Eastwood CONSULTING ENGINEERS
Job Ref: 45642 - Sketch No: SK010 - Rev: P01
Description: Monolith Totem Base
45642-ECE-XX-XX-SK-S-010-P01

Totem sign Base details - Not to scale

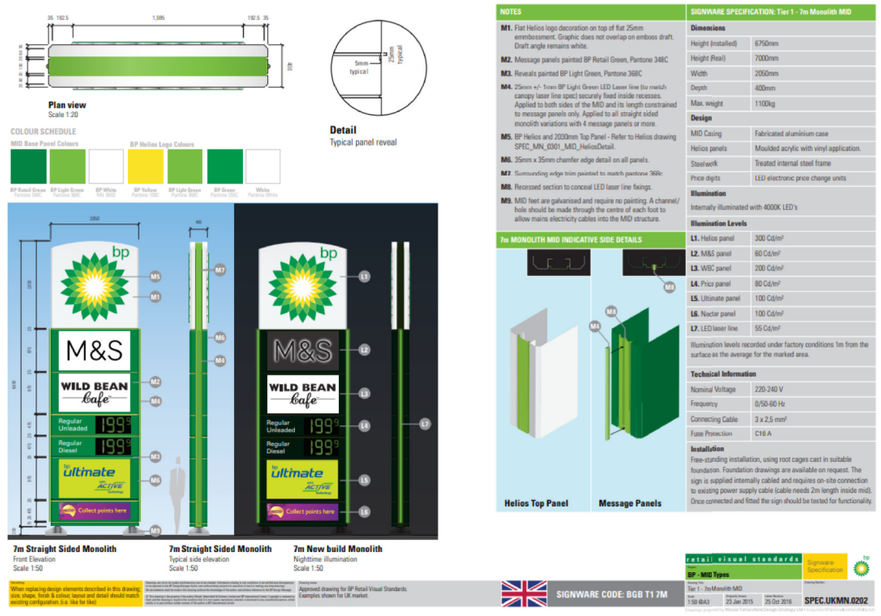

Totem Sign details - Not to scale

Proposed Site Plan and signage details

Karan Retail PFS
Ashby Road, Stapleton

6803_SK12
Scale: 1:200@A3

TAYLORDESIGN architects
w www.taylor-design.co.uk
Norcliffe House, Station Road, Wilmslow, Cheshire SK9 1BU
t 01625 528181 e office@taylor-design.co.uk

© Taylor Design 2026