GEOMETRY - FURNITURE	2019_V1
SYMBOLS	REFERENCES
	CHAIRS LAMINATE OR GRAPHIC PRINTED ON PLYWOOD LAMINATED
	AVAILABLE IN 3 NO. FINISHES RED - ABET LAMINATI - ROSSO TANGO - 823 WHITE GRAPHIC - WHITE GEOMETRY GRAPHIC PATTERN BLACK GRAPHIC - BLACK GEOMETRY GRAPHIC PATTERN
P L H	STOOLS & POUFS (H) COMMUNAL HIGH PEDESTALS - FLOOR FIXED (L) COMMUNAL LOW PEDESTALS - FLOOR FIXED (P) LOW POUFS - LOOSE
	AVAILABLE IN 1NO. FINISH: PEDESTAL: BLACK POWDER COATED STEEL RAL 9005 (BLACK GLOSS LEVEL 15-20% MATT FINISH) WITH WHITE GEOMETRICAL GRAPHIC PATTERN SEAT PAD: BLACK HILLS VINYL FA16
1300 1050 780	BENCH SEATS(780MM/1050MM/1300MM) - TBC BENCH ON WALL OR PARTITION (spaced 25mm off)
	AVAILABLE IN 1NO. FINISH: LIGHT GREY - FORMICA - MOUSE 928
1300 1050 780	BENCH SEATS WITH SEAT PAD (780MM/1050MM/1300MM) **BENCH ON WALL ONLY**
	AVAILABLE IN 1NO. FINISH: LIGHT GREY - FORMICA - MOUSE 928 SEAT PAD: ATN - 238x2179 250x1240/990/720mm TBC
	BENCH SEAT 1100MM BACK TO BACK GAP TO BENCHES - MIN 120MM
	AVAILABLE IN 2NO. FINISHES: BLACK GRAPHIC - PRINTED GEOMETRY PATTERN RED - ABET LAMINATI - ROSSO TANGO - 823 SEAT PAD: ATN - 238x2179; SIZE 240x1040mm TBC
	T1 TABLE 600x500MM / TOP HEIGHT : 750MM
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED FORMICA AGED ASH NATURALLE F8844-NT LAMINATE ON PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
	T2 TABLE 1100x600MM / TOP HEIGHT : 750MM
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED FORMICA AGED ASH NATURALLE F8844-NT LAMINATE ON PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
	PARTITION STANDUP 4
	TOP LAMINATED FORMICA AGED ASH NATURALLE LAMINATE ON PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC FIN WALLS: TBC
	PARTITION STANDUP 2
	TOP LAMINATED FORMICA AGED ASH NATURALLE LAMINATE ON PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC FIN WALLS: TBC
MAGIC TABLE	MAGIC TABLE
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
MAGIC TABLE	MAGIC TABLE
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
LOW - 3000mm LOW - 2400mm LOW - 1800mm	COMMUNAL TABLE (850/650x1200/1800/2400/3000MM)
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED FORMICA AGED ASH NATURALLE F8844-NT LAMINATE ON PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
	SIT UP (LOW 750mm/ HIGH 1100mm)
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED FORMICA AGED ASH NATURALLE F8844-NT LAMINATE ON PLYWOOD - TBC EXPOSED / STEEL LEG WITH GRAPHIC
	FEATURE MMM'S SIT-UP TABLE (1100mm HIGH) WITH SOLID PLYWOOD EDGES IN 5NO. SIZES: 1200X500mm (2NO. STOOLS) 1800x500mm (3NO. STOOLS) 2400x500mm (4NO. STOOLS) 3000X500mm (5NO. STOOLS) **POWER REQUIRED FOR FEATURE LIGHTING**
	AVAILABLE IN 1NO. FINISH: TBC
ROOM DIVIDER 750	PARTITIONS: FRAME PARTITION (1350mm/1100mm): LOW WALL/ PICTURE FRAMES ABOVE ROOM DIVIDER 50/50 (1350mm/1100mm): LOW WALL/ GLASS ABOVE WITH DECALS ROOM DIVIDER (750mm): FULL HEIGHT GLASS WITH DECALS

2021 CREW ROOM - N.I GREEN	2022_V4
FURNITURE SCHEDULE	
CHCR	**STAFF CHAIR** CHROME FRAME WITH WHITE POLYPROPYLENE SEAT SUPPLIED BY DISPLAY WORLD
HSCR	**HIGH STOOL** CHROME FRAME WITH WHITE POLPROPYLENE SEAT SUPPLIED BY DISPLAY WORLD
	TABLE 1200 x 600mm POWDER COATED BLACK PEDESTAL CT1 TABLE TOP FINISHED IN FORMICA LAMINATE NEVADA OAK F8588 **TABLE 600 x 600mm** POWDER COATED BLACK PEDESTAL CT2 TABLE TOP FINISHED IN FORMICA LAMINATE NEVADA OAK F8588 SUPPLIED BY DISPLAY WORLD.
PCU	**PC UNIT** BLACK FRAME WITH M10 CONUNTERSUNK HOLES, WHITE LAMINATE WORK TOP WITH DOLKEN EDGING 650 L x 400 D x 1000 H SUPPLIED BY DISPLAY WORLD
10NO. LOCKERS 4NO. LOCKERS	**HELMSMAN LOCKERS** BANKS OF 4 STANDARD OR 10 WALLET LOCKETS AVAILABLE WITH OR WITHOUT USB CHARGING DOOR FINISH IN FORMICA COMPACT - RANDOM PATTERN TO MATCH VISUAL 1. FORMICA - F7879 DUSTY JADE 2. FORMICA - F2255 POLAR WHITE
STORAGE STOOL	**STORAGE STOOL** TOP OF STOOL UPHOLSTERED SEAT PAD - JEMO 7044.04 - VESCOM STOOL BASE FORMICA LAMINATE NEVADA OAK F8588 SUPPLIED BY DISPLAY WORLD
BENCH 1200X500MM	**SIMPLE BENCH** TOP OF STOOL UPHOLSTERED SEAT PAD - JEMO 7044.04 - VESCOM BENCH LEGS IN FORMICA LAMINATE NEVADA OAK F8588 SUPPLIED BY DISPLAY WORLD - TO BE SIGNED OFF BY NW
A B C D E	**MODULAR CREW UNIT** **MODULE A:** 4No. LOCKERS & 1No. HIGH LEVEL CUPBOARD **MODULE B:** 6No. LOCKERS, 1No. OPEN SHELF & 1No. LARGE HIGH LEVEL CUPBOARD **MODULE C:** 1No. LARGE HIGH LEVEL CUPBOARD, 1No. IRONING BOARD STORAGE, 4No. OPEN SHELVES WITH USB SOCKETS **MODULE D:** CONCEALED RECYCLING UNIT & OPEN LEVEL SHELF **MODULE E:** KITCHEN IN A CUPBOARD. UNDER COUNTER FRIDGE SUPPLIED BY H&K, WORKTOP FOR MICROWAVE AND HIGH LEVEL CUPBOARD.PLUG SOCKETS REQUIRED SURROUND FINISHED IN FORMICA LAMINATE MILLENIUM OAK WITH FORMICA SPRING WHITE BACK PANELS. DOORS TO BE A MIX OF FORMICA F7879 DUSTY JADE & F2255 SPRING WHITE SUPPLIED BY DISPLAY WORLD

MARKETING ELEMENTS	2022_V6
PRICE MENU	DIGITAL PRICE BOARD - 32" DPB-P32
DIGITAL WINDOW POSTER	DIGITAL WINDOW POSTER (INSTORE) - 46" EXTERIOR FACING - DWP EX-P46 INTERIOR FACING - DWP IN-P46
ORB	ORDER READY BOARD- 32" ORB-L32
2 x 49" DIGITAL SCREENS	PROMO BOARDS 2 x 49" PORTRAIT SCREENS
	DOUBLED SIDE SELF ORDER KIOSK (SOK) SINGLE SIDED SELF ORDER KIOSK (SOK)
	AIRCHARGE MOBILE PHONE CHARGING SOLUTION
TABLET	TABLET TABLE. 700mm SCREEN IN SCHEME SPECIFIC LAMINATE IF POWER/DATA CANT BE ACCESSED THROUGH FLOOR.

COLOUR REFERENCE	
🟥	NEW EQUIPMENT/FURNITURE (OR INDICATED BY COLOURED HATCH)
⬛	EXISTING/FURNITURE EQUIPMENT
🟦	RELOCATED/FURNITURE EQUIPMENT
🟪	FUTURE/OPTIONAL EQUIPMENT
🟩	NEW CONSTRUCTION
🟧 ┄	EXISTING STRUCTURE TO BE REMOVED
🟩 ┄	EXISTING 30 MINUTE FIRE RATE WALL
🟪 ┄	EXISTING 60 MINUTE FIRE RATE WALL
🟦 ┄	PROPOSED 30 MINUTE FIRE RATE WALL
🟥 ┄	PROPOSED 60 MINUTE FIRE RATE WALL

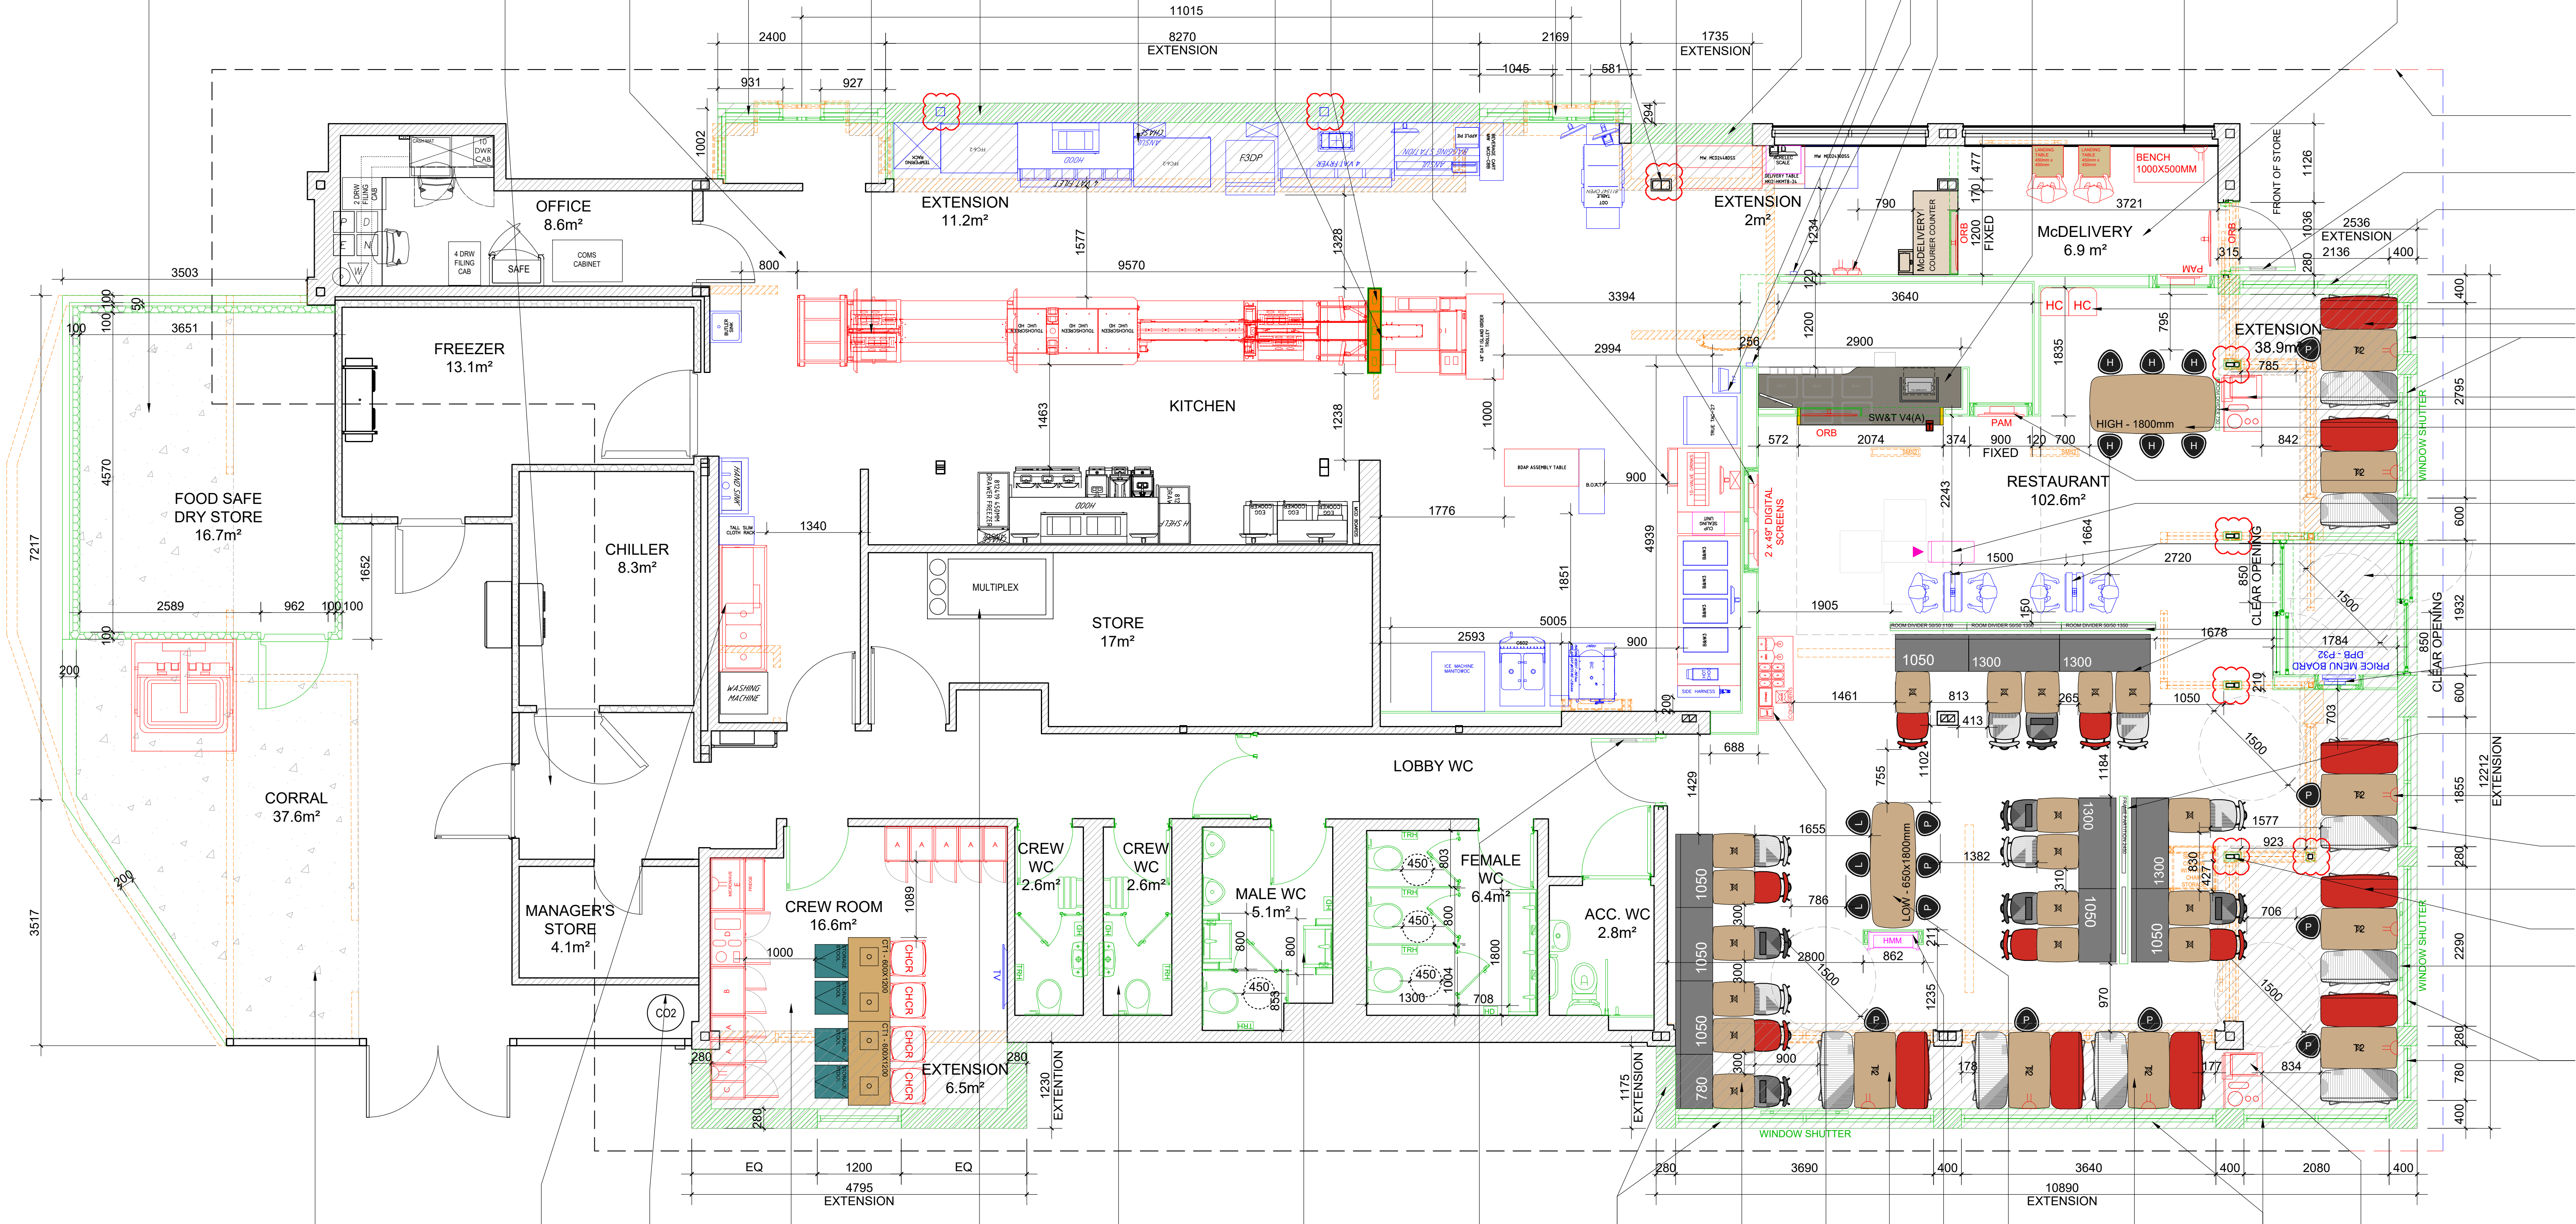

NEW FOOD SAFE DRY STORE CONSTRUCTED OF INSULATED PANELS. NEW CONCRETE SLAB & NEW DOOR

NEW WR TO BOH & BUMP RAILS

NEW 200X200 FLOOR TILES & WR TO KITCHEN

NEW BOOTH WINDOW

NEW REDUCED COMPACT HUB & SPOKE

NEW EXTERNAL WALL TO MATCH EXISTING

RELOCATED KITCHEN EQUIPMENT - H&K TO ADVISE:
- NEW TOASTERS REQUIRED
- FUTURE PROOF CHICKEN VAT EXPANSION
- U/E EXTENSION & RELOCATED COLUMNS - S.E TO ADVISE

CCTV MONITOR TO OAT OF DA. SPECIALIST TO ADVISE

NEW OAT WALL

BEVERAGE CELL H+K TO ADVISE:
- RELOCATED TRUE TAC CHILLER
- NEW 10 VALVE DRINKS
- 4NO RELOCATED COFFEE MACHINES
- RELOCATED BIC, MCFLURRY & SHAKE MACHINE

NEW BOOTH WINDOW

RETAINED COLUMN

NEW WALLS & 2No. NEW PORTRAIT 49" SCREENS - SEE ELEVATIONS FOR DETAILS

NEW EXTERNAL WALL TO MATCH EXISTING

LOCATION OF POS17 AS FRANCHISEE REQUESTS

RELOCATED DEFIBRILLATOR TO BE INSTALLED AT HIGH LEVEL. RELOCATED INTRUDER ALARM & DIGITAL STAFF SAFE. TBC @ STAGE 2 MEETING

NEW POS2 & 2NO. USB ABOVE

NEW CUSTOMER SERVICE WINDOW & COUNTER, NEW ORB INSTALLED AT HIGH LEVEL

OPAQUE VINYL TO BE APPLIED TO INTERNAL FACE OF EXISTING GLAZING AT 1800AFFL.

NEW McDELIVERY AREA:
- NEW 640mm FLAT COUNTER
- NEW ORB INSTALLED AT HIGH LEVEL
- NEW EXTERNAL FACING ORB INSTALLED AT HIGH LEVEL
- NEW WAITING BENCH & LANDING TABLES
- NEW PAM INSTALLED AT HIGH LEVEL

RELOCATED SECTION OF ROOF WITH NEW INFILL TO MATCH EXISTING

NEW DOOR

NEW GLAZING WITH FRAMES DECORATED GREY RAL 7022 & STALL RISER TO MATCH EXISTING

NEW 2NO.STACKABLE HIGH CHAIRS

NEW BOOTH SEATS & POUF

NEW GLAZING WITH FRAMES DECORATED GREY RAL 7022 & STALL RISER TO MATCH EXISTING

NEW MINI RECYCLING UNIT

NEW ROOM DIVIDER SCREEN

NEW HIGH COMMUNAL TABLE & HIGH STOOLS

NEW PAM INSTALLED AT HIGH LEVEL

FURTURE PROOF FOR CASH RECYCLER

RELOCATED DOUBLE SOKS

NEW ENTRANCE LOBBY (GLAZING & SLIDING DOORS) WITH 850mm CLEAR OPENING

NEW ROOM DIVIDRS, BENCHES, TABLES & CHAIRS

NEW STUD WALL & RELOCATED PRICE MENU BOARD

NEW POSTER FRAME PARTITIONS, BENCHES, TABLES & CHAIRS

NEW USB TO ALL BOOTHS

NEW GLAZING WITH FRAMES DECORATED GREY RAL 7022 & STALL RISER TO MATCH EXISTING

NEW BOOTH SEATS & POUFS

NEW BOXED OUT WALL TO EXISTING COLUMNS

ALL NEW WINDOW SHUTTERS

NEW GLAZING WITH FRAMES DECORATED GREY RAL 7022 & STALL RISER TO MATCH EXISTING

CORRAL EXTENSION:
- NEW WALLS CLAD IN ALUMINIUM PANELS FINISHED IN GREY RAL 7022
- NEW COMPACTOR REQUIRED
- NEW CONCRETE SLAB

NEW COMPACT 3 TUB SINK RETAINED WASHING MACHINE. RELOCATED HANDWASH & BUTLER SINK. FRANCHISEE REQUEST FOR NO DISHWASHER

RETAINED CO2 TANK

NEW N.I GREEN CREW ROOM:
- NEW EXTERNAL WALL & HIGH LEVEL WINDOW
- NEW DOOR
- NEW MODULAR STORAGE UNIT (INCLUDING KITCHEN IN A CUPBOARD, RECYCLING, LOCKERS & IRON STORAGE)
- RETAINED SPLIT AC
- NEW FURNITURE & STORAGE STOOLS
- NEW COAT HOOKS
- RELOCATED TV

RETAINED MULTIPLEX

FULL REFURB TO CREW WCS & CHANGES:
- NEW SANITARYWARE
- NEW CUBICLES
- NEW DOORS

FULL REFURB TO CUSTOMER WCS:
- NEW SANITARYWARE
- NEW CUBICLES
- NEW DOORS
- BESPOKE TROUGH SINK TO FEMALE WC

FULL REFURB & NEW DOORS TO WC LOBBY

NEW EXTERNAL WALL, GLAZING WITH FRAMES DECORATED GREY RAL 7022 & STALL RISER TO MATCH EXISTING

NEW BENCHES, TABLES & CHAIRS

NEW CONDIMENT UNIT

NEW BOOTH SEAT & POUF

FUTURE PROOF FOR DIGITAL HMM

NEW LOW COMMUNAL TABLE WITH AIRCHARGE (DISKS ONLY), NEW LOW STOOLS & POUFS

NEW BOOTH SEATS & POUFS

NEW GLAZING WITH FRAMES DECORATED GREY RAL 7022 & STALL RISER TO MATCH EXISTING

NEW MINI RECYCLING UNIT

PROPOSED GENERAL ARRANGEMENT PLAN 1:50

NOTES

- All dimensions and levels are to be checked on site.
- Any discrepancies are to be reported to the architect before any work commences.
- This drawing shall not be scaled to ascertain any dimensions. Work to figured dims only.
- This drawing shall not be reproduced without express written permission from AEW.
- Title overlay drawings and ownership boundaries are produced using all reasonable endeavours. AEW cannot be responsible for the accuracy or scale discrepancy of base plans supplied to them.
- All works are to be undertaken in accordance with Building Regulations and the latest British Standards.
- All proprietary materials and products are to be used strictly in accordance with the manufacturers recommendations.

CDM 2015

Client notified of duties: **At Design Workshops**
Principal Designer: **TBC**

Unless noted below, all known hazards have been highlighted on the drawing:

Notes:
All drawings to be read in conjunction with all other drawings as noted on issue sheet.

NOTES:
FRANCHISEE REQUEST FOR:
- NO TABLETS
- NO MAGIC TABLE
- NO DISHWASHER

AREAS SCHEDULE	EXISTING	PROPOSED
TOTAL COVERS	87	87
DINING AREA INTERNAL AREA (m²)	115.2m²	102.6m²
WC INTERNAL AREA (m²)	14.5m²	14.5m²
CREW ROOM INTERNAL AREA (m²)	11.9m²	16.6m²

DRAWINGS BASED ON:
DRAWING NO. 1125 - 50_K
EXISTING H&K: DIN-80917 UK977 HINCKLEY 2 - GBR - COTF REV A K1

COTF & REIMAGE GEOMETRY

DESIGN WORKING GROUP APPROVED

REV	Date	Drawn by: -	Checked by: -
A	24/04/2023	AL	MW
UPDATED FOLLOWING STAGE 1 MEETING UPDATES 12/04/23 & DWG COMMENTS RECEIVED 12/03: - NEW STACKABLE HIGH CHAIRS - NEW 200X200MM FLOOR TILES TO KITCHEN - NEW WR TO BOH & BUMP RAILS ADDED - RETAINED MULTIPLEX - NEW COMMUNAL TABLE - RELOCATED ROOF & INFILL SECTION TO MATCH EXISTING - RELOCATED DIGITAL STAFF SAFE & INTRUDER ALARM. TBC AT STAGE 2 MEETING - NEW CORRAL WALL CLAD IN ALUMINUM PANELS RAL 7022 DWG APPROVED STAMP ADDED			
-	22/03/23	AL	MW
INITIAL ISSUE			

Status: **S2**
Purpose of Issue: **For Information**

drawing stage: **STAGE 1**

client
McDonald's Restaurants Ltd

project
HINCKLEY FIELDS
LEICESTERSHIRE
NORTH PERIMETER ROAD LE10 1YG

store: **0977**

drawing title
PROPOSED GA PLAN
COTF

date: **22.03.2023**
drawn: **AL**
scale@A0: **1:50**
checked: **MW**

Rev: **A**

Job No: **13199_AEW_0977_0050**

aew architects
0161 214 4370
www.aewarchitects.com