


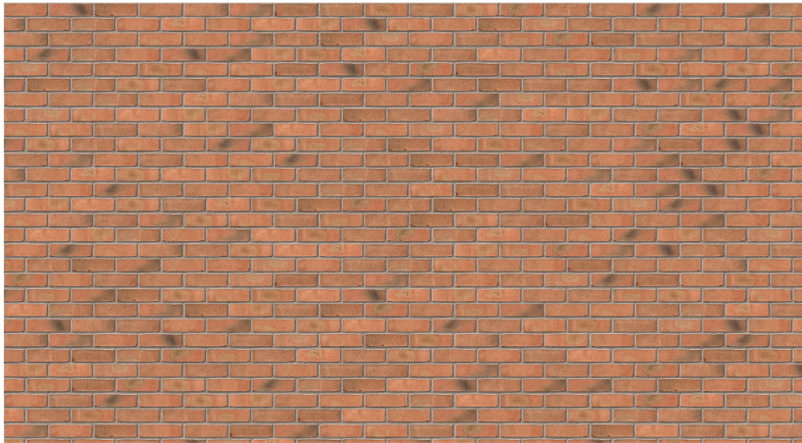

## Product Information

|                        |                                  |
|------------------------|----------------------------------|
| Ibstock Code:          | A4982A                           |
| Type:                  | Stock                            |
| Facing Description:    | Distressed                       |
| Dry Brick Weight (kg): | 2.2kg                            |
| Pack Quantity:         | 500                              |
| Packaging (standard):  | Banded (Plastic) and Stretchwrap |
| Factory:               | Ellistown                        |

## Technical Specification (to BS EN 771-1)

|                                                        |             |
|--------------------------------------------------------|-------------|
| Brick Dimensions (L x W x H mm):                       | 215x102x65  |
| Size Tolerances Mean & Range:                          | T2 R1       |
| Configuration:                                         | Single Frog |
| Voids (%):                                             | Aug-13      |
| Compressive Strength (N/mm²):                          | 20          |
| Active Soluble Salts:                                  | S2          |
| Water Absorption (% weight):                           | 19          |
| Durability:                                            | F2          |
| Gross Dry Density (Sound Insulation) (Kg/m³):          | 1530        |
| Equivalent Thermal Conductivity "K" value 5% Exposed:  | 0.82        |
| Initial Rate of Absorption (Suction Rate) (Kg/m²/min): | 2.6         |
| EAN:                                                   | 5.03634E+12 |