


Pub Ventilation




BACK WALL & VERTICAL RISE

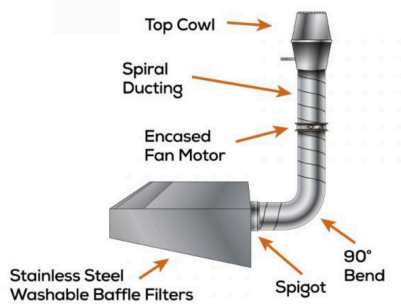

3.6 m x 450mm spiral extract chimney finishing 1m above the new roof line, rising up the rear elevation on the external fabric secured with metal band frame.

Suitable for standard Gas & Electrical equipment.
Each piece of equipment to have maximum overall depth of 900mm front to back.

- Stainless Steel Extract Hood Wall Type
- Designed to meet the requirements of small to medium size catering environments
- Can be manufactured to suit building fabric i.e tapered for low ceilings or square
- Stainless Steel washable Grease Separators
- Manufactured entirely from high quality 304/430 stainless steel
- Grease Collection draw
- Easy clean design
- Heavy duty construction
- Side-Rear or Top exit points
- LED Lighting to give 500 LUX at work surface
- Pressure drop through filters and spigot connection 125pa



Components included:

- 1 x Canopy
- 1 x ILU
- 1 x 90° Bend
- 1 x Spiral Ducting (3000mm)
- 1 x Inline Axial Fan
- 1 x Pair of Motor Flanges
- 1 x Speed Controller
- 1 x Top Cowl

Accreditations



Address
Duct Hygiene
Mainwell House,
Bedwell Road,
Wrexham industrial estate,
Wrexham,
LL13 9TS

Phone Number
01390 0536 135

The Ventilation system will be maintained on an annual contract with duct hygiene.



Vent Axia 450mm 1 Phase 4 Pole Sabre® Sickle Short Case Fan

- One shot die cast impeller, dynamically balanced for smoother operation
- External Rotor Motors on all models for compact efficient design
- All models are speed controllable and can be wired for reverse running
- Thermal Overload Protection for motor protection
- Maintenance free sealed for life bearings

Specification

Airflow Cubic Metres per Hour	7128 m³/h
Airflow Litres per Second	1980 l/s
Decibel Rating	49 dB[A] @ 3 m
Depth	160mm
Dimensions	(D)160 mm
Fan Speed	1310r/min
Guarantee	2 Years
Hole Size	487mm